

BEST 1C Series Standard Cores

Key Figures

Lifetime per unit: 40,000 cycles
Weight per unit: 0.04 kg
Production location: Indianapolis, US

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		

Material used (%)


■ Brass ■ Steel ■ Paper ■ Other

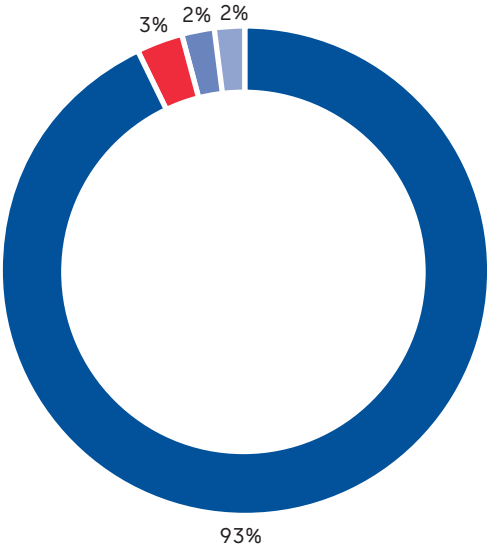

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 0.3 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Zürich airport

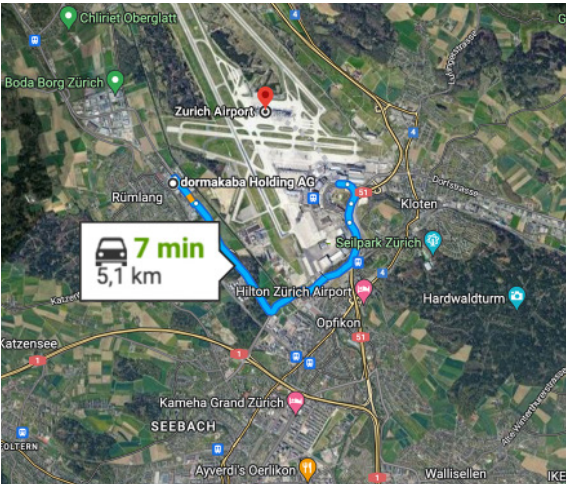

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

BEST Cores draw on the legacy of quality and expertise that keep our products on the forefront of the industry. Brass alloy construction result in reliable performance over time. BEST Cores allow for easier rekeying by allow a user to remove the core from the lock without the need to remove the lever.

Total Global Warming Potential per life cycle stage (kg CO₂e)

