

HSW-DRS

Sliding wall system

Key Figures

Lifetime per unit: 15 years
Weight per unit: 18 kg/m²
Production location: Reamstown, USA


Production standards

Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		


Material used (%)

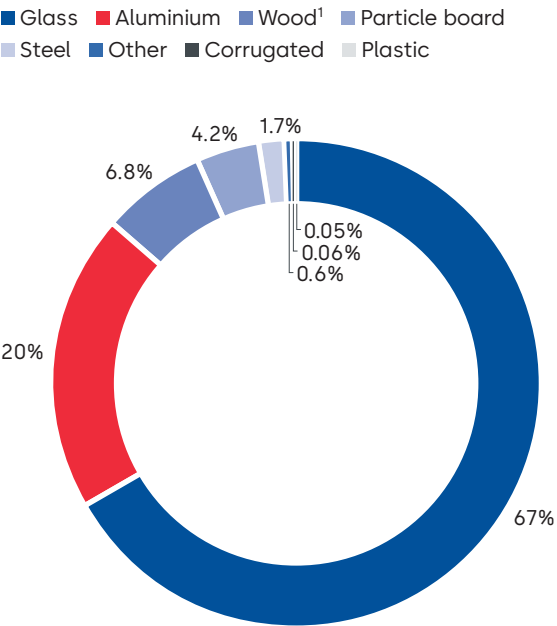

¹ Wood pallets used to transport of products.
² Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP² across the life cycle is 91 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Enneetal to Den Haag

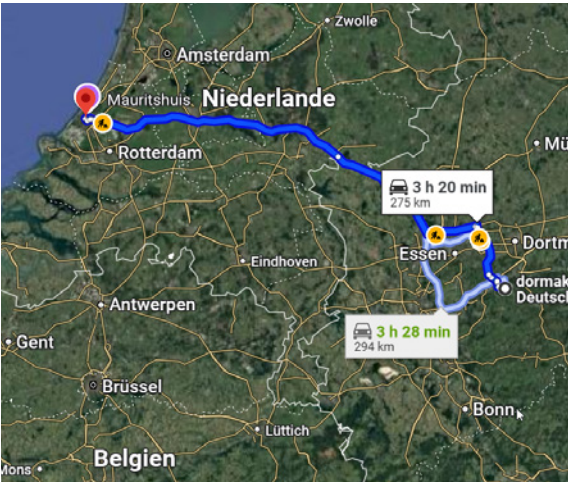

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

Horizontal sliding wall systems are ideal for any application where total vision is required. Whether the purpose is to link or separate, add security, provide noise barrier or remove barriers, dormakaba's HSW sliding wall systems are available in a variety of configurations to meet your design requirements. The LCA results presented here are the TRACI 2.1 LCA results of the product, the module reuse/recycling potential is not declared.

Total Global Warming Potential per life cycle stage (kg CO₂e)

