

TS Match and TS Match X Rack and pinion door closer

Key Figures

Lifetime per unit: 20 years
Weight per unit: 2.3 kg
Production location: Singapore

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓ (TS Match)		

Material used (%)


Aluminium Steel Paper Oil
Plastic Zinc

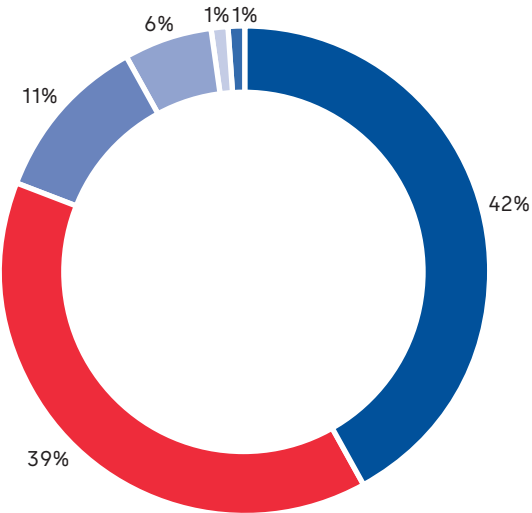

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 19 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Dubai Al Qusais Industrial Area to Dubai airport

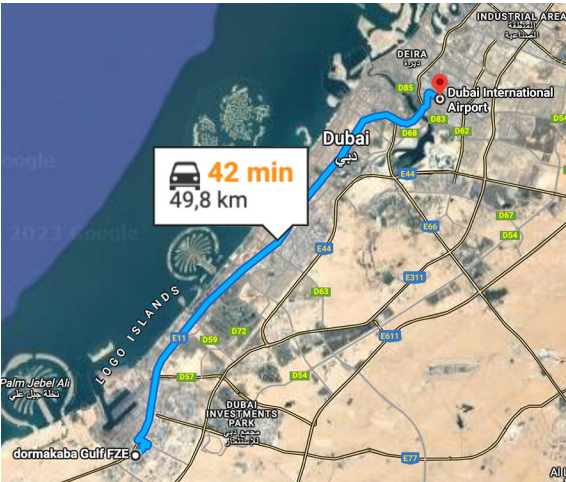

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The TS Match and TS Match X supplements the comprehensive slide channel door closer range from dormakaba. The closing speed is infinitely adjustable and with the concealed mounting plate which is optionally available, the TS Match is the perfect door closers for the initial equipment of the door. The door closer series is designed for commercial and institutional applications and is suitable for internal and external doors. It can be used in a variety of applications, including as door closer for fire and anti-flame doors.

Total Global Warming Potential per life cycle stage (kg CO₂e)

