

ARGUS V60 Sensor barrier

Key Figures

Lifetime per unit: 15 years
Weight per unit: 273 kg
Electricity use per year: 154 kWh
Production location: Bühl, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		✓

Material used (%)

Aluminium Glass Paper Stainless steel
Steel Plastics Zinc Electronics

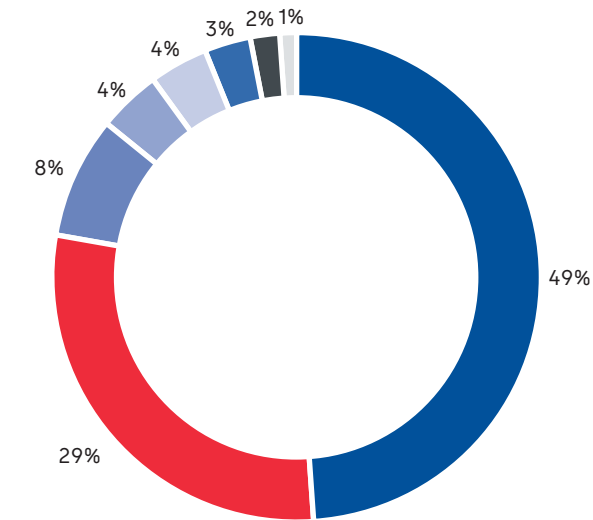

The GWP¹ across the life cycle is 1,354 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Buenos Aires to Quito (8,700 km)




¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.

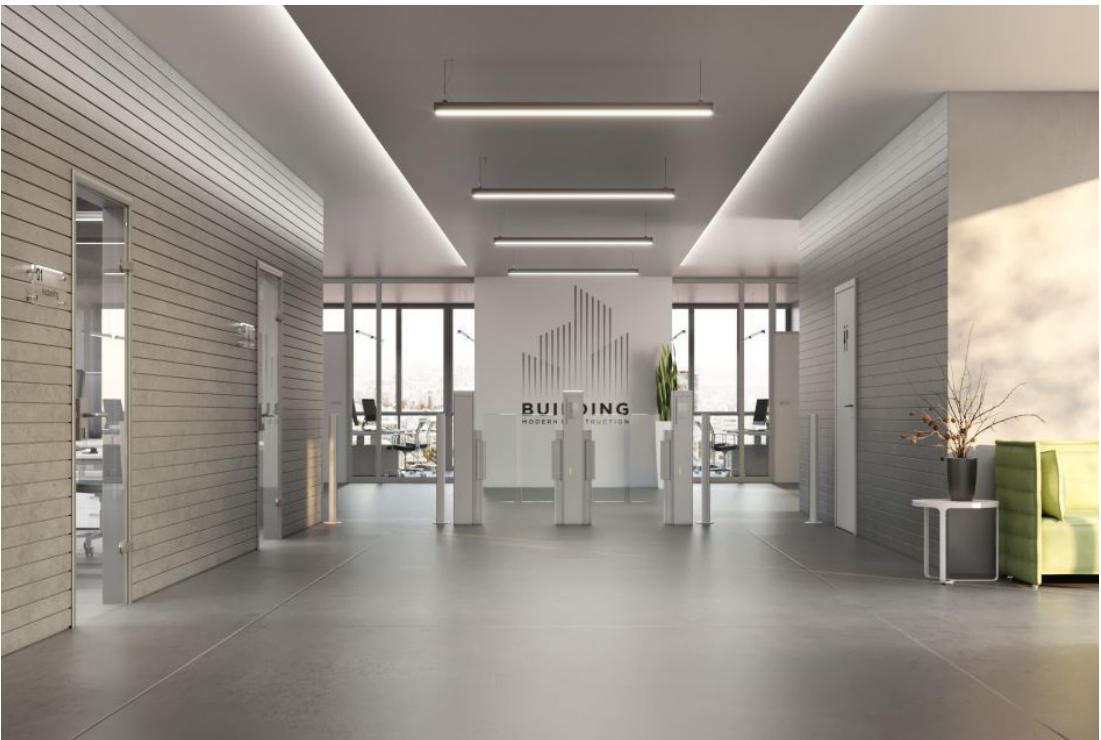

Description

ARGUS V60 sensor barriers are particularly compact and strikingly elegant. Despite a housing depth of only 240 mm, the ARGUS V60 is a full-performance sensor barrier ideal for use where space is limited. The reader units can be installed the same way as other versions of the Argus product range. The Argus sensor barriers are available in four versions; the Argus 40 with a length of 1,200 mm, Argus 60 at 1,600 mm, Argus 80 at 1,660 mm and the new Argus V60, particularly compact at only 240mm, for use in areas with constrained space requirements.

Total Global Warming Potential per life cycle stage (kg CO₂e)

