

# MUTO Sliding Door System

## Key Figures

Lifetime per unit: 15 years  
Weight per unit: 38.7 kg  
Production location: Reamstown, USA

## Production standards


| Quality            | Environmental       | Occupational Health & Safety | Energy | Produced with green electricity |
|--------------------|---------------------|------------------------------|--------|---------------------------------|
| ISO 9001 certified | ISO 14001 certified |                              |        |                                 |

## Product declarations / certifications

| Environmental Product Declaration | Health Product Declaration | Building Product Declaration | Other                |
|-----------------------------------|----------------------------|------------------------------|----------------------|
| ✓                                 | ✓                          |                              | DGNB Navigator Label |

## Material used (%)


■ Aluminium ■ Packaging ■ Plastics  
■ Paper

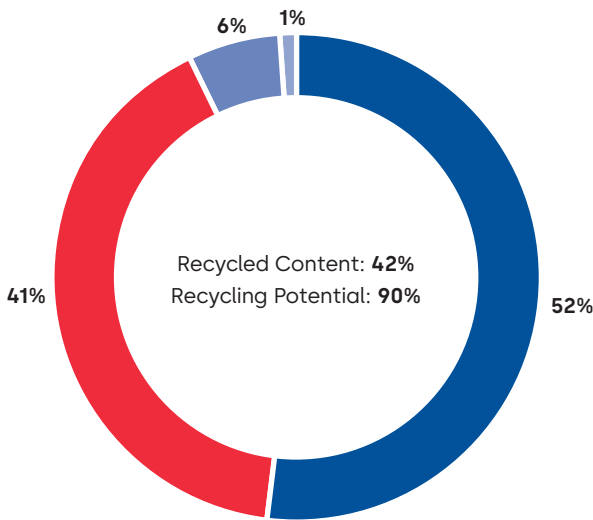

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is a standard unit of measurement used to express the climate impact of greenhouse gas emissions by converting them into the amount of carbon dioxide that would produce the same global warming effect, based on their global warming potential (GWP). It is widely used in product carbon footprint (PCF) calculations to compare and aggregate emissions of different greenhouse gases on a common basis.

## The PCF<sup>1</sup> across the life cycle is 102 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Los Angeles to San Francisco (≈ 597 km).

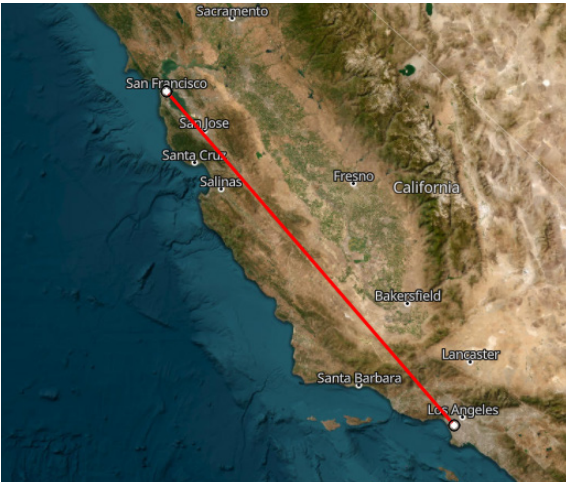

Scan the QR code or click here for more information about our sustainability product declarations.



Scan the QR code or click here for more information about this product.



## Product carbon footprint per life cycle stage (kg CO<sub>2</sub>e)

