

FFT FLEX Green Folding door system

Key Figures

Lifetime per unit: 10 years
Weight per unit: 223 kg
Electricity use per year: 225 kWh
Production location: Zusmarshausen, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)

■ Glass ■ Aluminium ■ Steel ■ Plastic
■ Electronics ■ Zinc

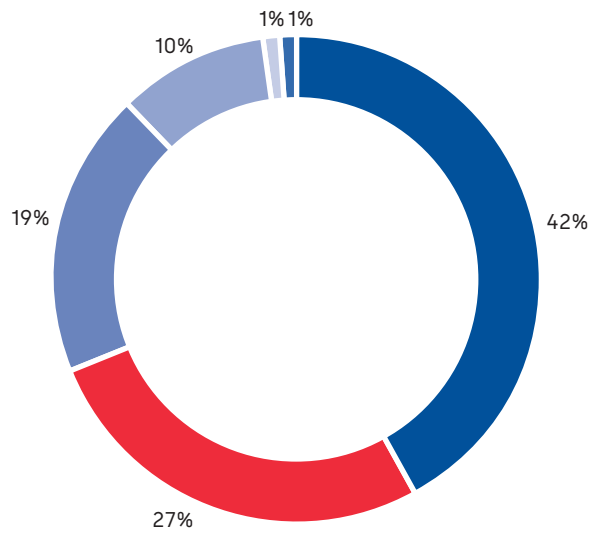

The GWP¹ across the life cycle is 405 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Paris to Rome (2,200 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The FFT FLEX Green is an automatic folding door with thermally separated, particularly slim profiles and a silent, dynamic drive system. It is particularly suitable where space is restricted. It permits opening widths of up to 2.4 metres and achieves therefore a maximum escape route width. In combination with ISO glass, the FFT FLEX Green ensures good thermal insulation of external doors.

Total Global Warming Potential per life cycle stage (kg CO₂e)

