c-lever pro Electronic door lock

Key Figures

Lifetime per unit: 10 years Weight per unit: 2.1 kg Electricity use per year: 0.00001 kWh Production location: Wetzikon, Switzerland

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		¥

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
v	~		


Material used (%)

■ Zinc ■ Stainless steel ■ Steel ■ Electronics ■ Brass ■ Plastics ■ Cable ■ Paper



The GWP¹ across the life cycle is 7.5 kg CO_2e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Dortmund to Hagen



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability




Scan the QR code or click here for more information about our sustainability product declaration.



Description

The c-lever pro is an electronic door fitting. The external fitting contains an antenna and a mechatronics unit. Following identification of an authorised medium, the door can be opened manually. The c-lever pro supports the latest radio-frequency identification (RFID) technologies and is available with the wireless function: access rights are transmitted from your PC to the door components wirelessly and in real time.

Total Global Warming Potential per life cycle stage (kg CO₂e)

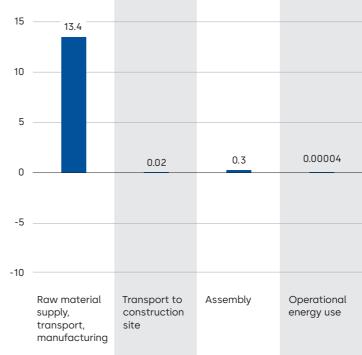

0.008	0.1	0.0009	
			-6.3
Transport	Waste processing	Disposal	Reuse / recycling potential