

# ARGUS AIR Sensor barriers

## Key Figures

**Lifetime per unit:** 10 years  
**Weight per unit:** 256 kg  
**Electricity use per year:** 571 kWh  
**Production location:** Bühl, Germany

## Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

## Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		✓

## Material used (%)

■ Aluminium ■ Glass ■ Stainless steel ■ Others  
■ Plastic ■ Steel

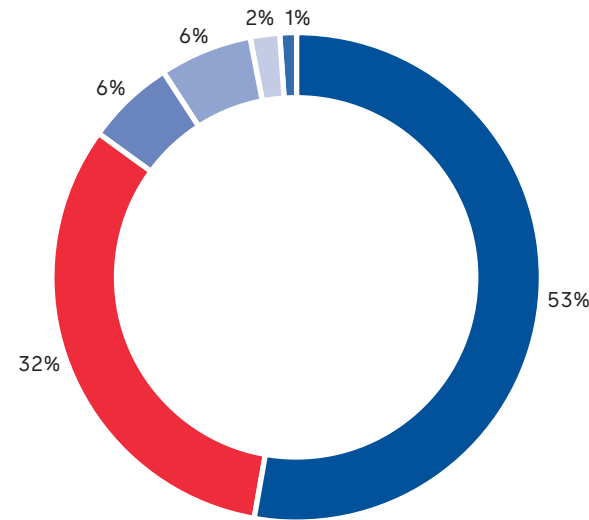

The GWP<sup>1</sup> across the life cycle is 3,020 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a roundtrip flight from Las Vegas to London (16,900 km)



<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



## Description

eGates Argus Air for fast, safe passenger flow at airports. ARGUS AIR supports passengers and staff during the entire process, from entering the airport to the aircraft. The sensor barriers with their narrow and short design ensure a fast flow of passengers at the airports and smooth, comfortable processes.

## Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

