

TG138 series

Ladder pull

Key Figures

Lifetime per unit: 10 years

Weight per unit: 7.0 kg

Production location: Reamstown, USA

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)


■ Stainless steel ■ Steel ■ Plastic

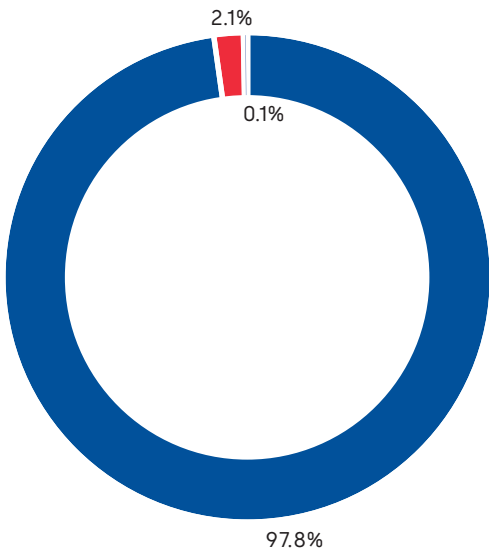

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 13 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Ennepetal to Dortmund airport

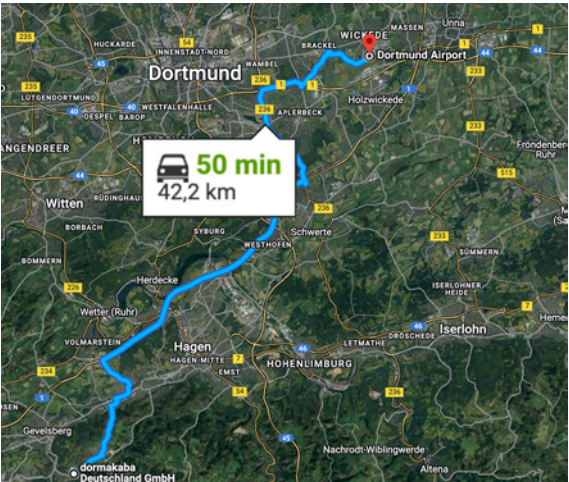

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

dormakaba offers a wide selection of pulls and handles for both tempered glass doors and solid material doors made of aluminum, wood, or mixed material: Locking and non-locking ladder pulls, back-to-back pulls, customized handle solutions, and a variety of finished materials. This EPD refers to the locking and nonlocking ladder pull TG138 series.

Total Global Warming Potential per life cycle stage (kg CO₂e)

