

BEST HD7000

Rack and pinion door closer

Key Figures

Lifetime per unit: 20 years
Weight per unit: 3 kg
Production location: Indianapolis, US

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		

Material used (%)


Steel Aluminium Oil Plastic
Coating Other

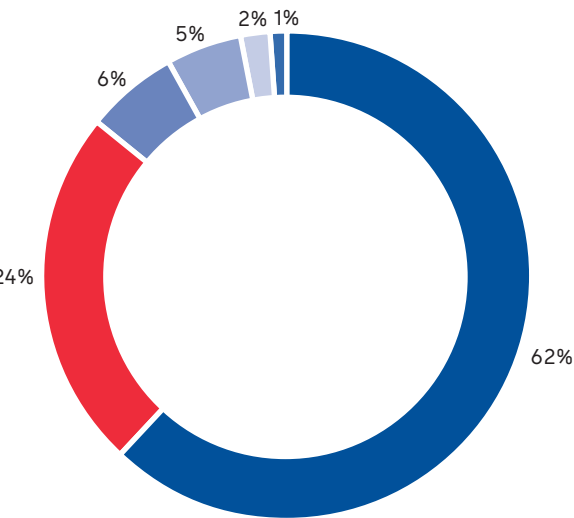

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 16 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Schaffhausen

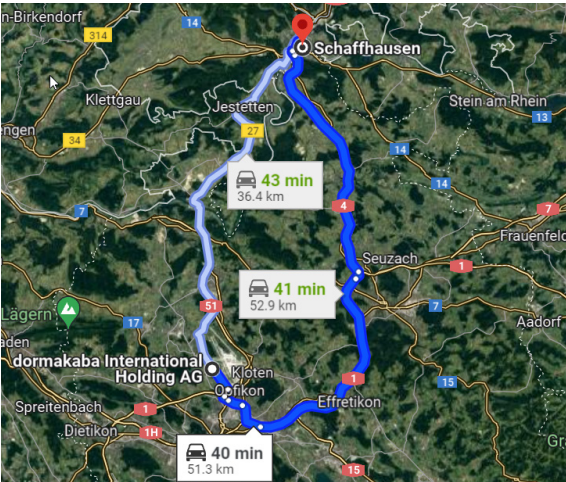

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The HD7000 Series door closers are non-handed surface applied door closers with adjustable spring power (size 1-6) and backcheck that controls opening motion during abusive or abrupt opening. Supported by a full complement of optional arms, plates, and brackets, the door closers provide the flexibility needed to meet the demands of commercial and institutional applications.

Total Global Warming Potential per life cycle stage (kg CO₂e)

