

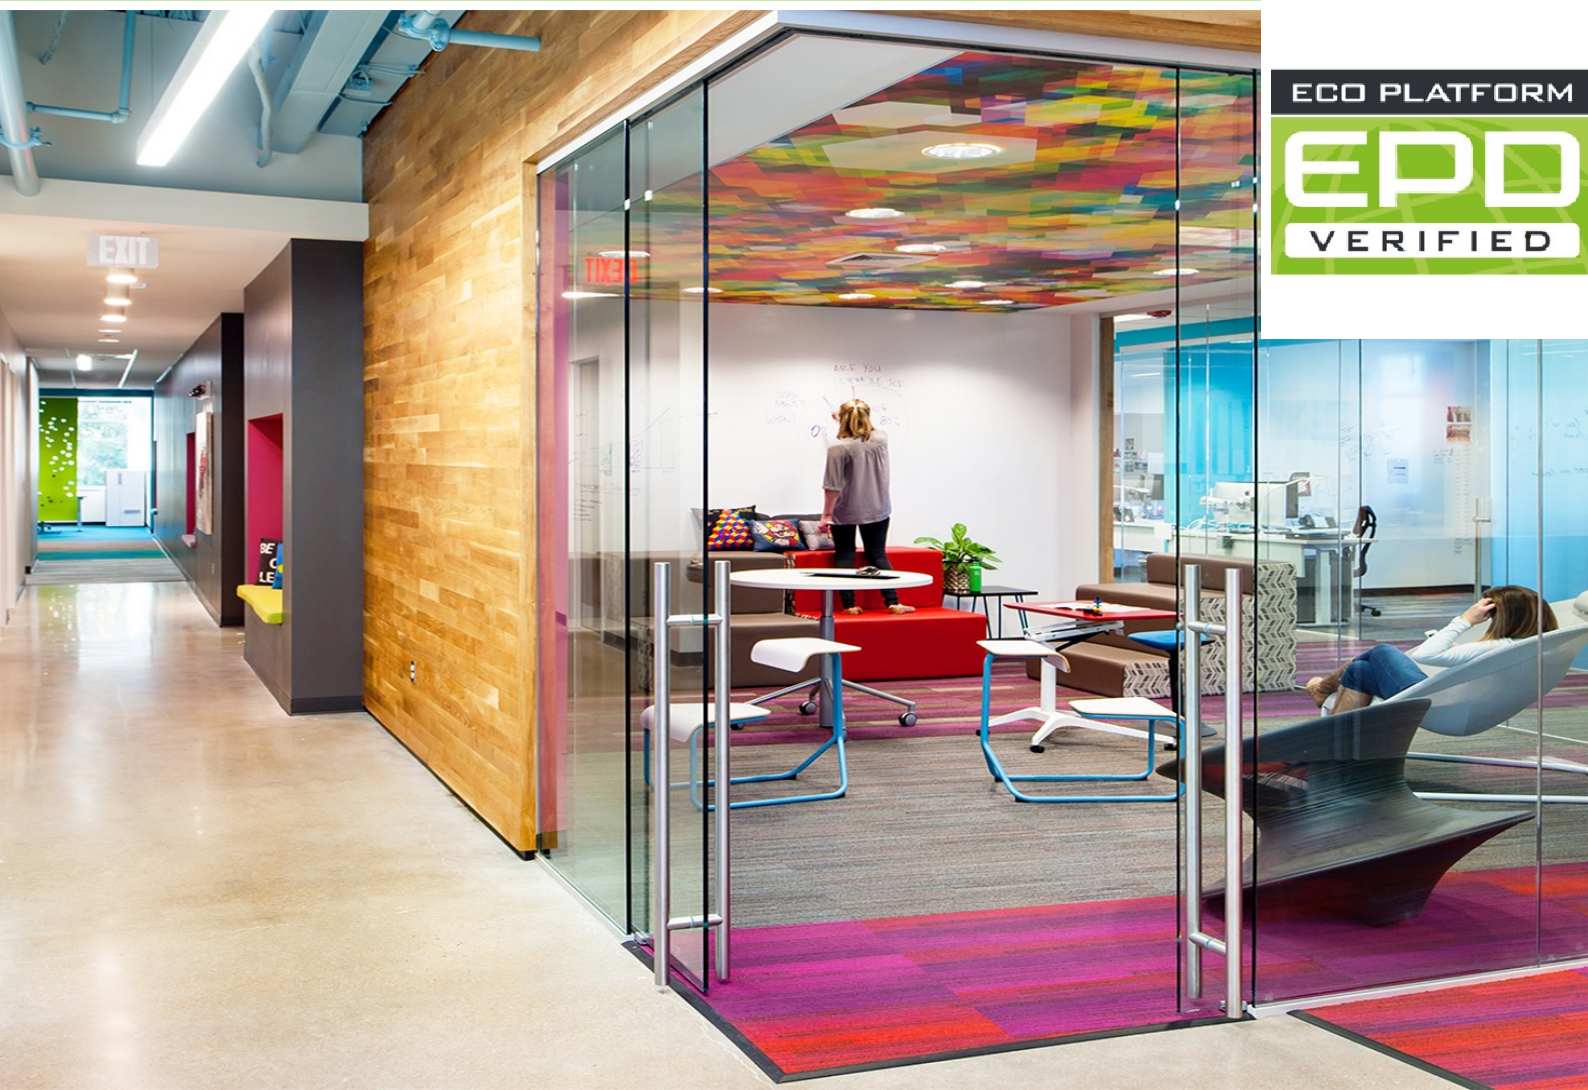
ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2




Owner of the Declaration	dormakaba International Holding GmbH
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-DOR-20250029-CBA1-EN
Issue date	25/06/2025
Valid to	24/06/2030

Sliding door system MUTO dormakaba

www.ibu-epd.com | <https://epd-online.com>



General Information

dormakaba	Sliding door system MUTO								
Programme holder IBU – Institut Bauen und Umwelt e.V. Hegelplatz 1 10117 Berlin Germany	Owner of the declaration dormakaba International Holding GmbH DORMA Platz 1 58256 Ennepetal Germany								
Declaration number EPD-DOR-20250029-CBA1-EN	Declared product / declared unit 1 piece of the product: Sliding door system MUTO consisting of the following items: <ul style="list-style-type: none">Streamlined headerFramed glass wall systemProduct packaging								
This declaration is based on the product category rules: Building Hardware products, 01/08/2021 (PCR checked and approved by the SVR)	Scope: This Environmental Product Declaration refers to a specific sliding door system manufactured by dormakaba. The production site is located in Reamstown (USA). The data represents the year 2023. The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences. The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as <i>EN 15804</i> .								
Issue date 25/06/2025	Verification <table><tr><td colspan="2">The standard EN 15804 serves as the core PCR</td></tr><tr><td colspan="2">Independent verification of the declaration and data according to ISO 14025:2011</td></tr><tr><td><input type="checkbox"/></td><td>internally</td></tr><tr><td><input checked="" type="checkbox"/></td><td>externally</td></tr></table>	The standard EN 15804 serves as the core PCR		Independent verification of the declaration and data according to ISO 14025:2011		<input type="checkbox"/>	internally	<input checked="" type="checkbox"/>	externally
The standard EN 15804 serves as the core PCR									
Independent verification of the declaration and data according to ISO 14025:2011									
<input type="checkbox"/>	internally								
<input checked="" type="checkbox"/>	externally								
Valid to 24/06/2030									
 Dipl.-Ing. Hans Peters (Chairman of Institut Bauen und Umwelt e.V.)									
 Florian Pronold (Managing Director Institut Bauen und Umwelt e.V.)	 Matthias Klingler, (Independent verifier)								

Product

Product description/Product definition

The sliding door system MUTO is particularly suitable for glass applications, but can be adapted for wood, metal, or other door material solutions. Depending on the type of MUTO unit, our SoftClose (DORMOTION) feature provides a cushioning effect either at closing only or at both closing and opening. This cushioning effect brings the sliding door to a soft end-point.

For the use and application of sliding door system MUTO, the respective national provisions at the place of use apply:

- Sound Transmission Class (STC)
- Americans with Disabilities Act (ADA)

Application

The sliding door system MUTO is ideal for following applications:

- Commercial
- Retail
- Hospitality
- Entertainment
- Education

Technical Data

The sliding door system MUTO has following technical properties:

- Optional self-closing action
- Damping DORMOTION – no glass preparation necessary, suitable for retrofit (excluding pull hardware)
- Suitable for glass, wood, and other door materials
- Synchro and telescopic model options available

- Easy installation and accessible adjustment thanks to removable front cover

Performance data of the product with respect to its characteristics in accordance with the relevant technical provision which can be applied are mentioned above.

Base materials/Ancillary materials

The major material composition including the packaging of the product is listed below:

Name	Value	Unit
Aluminium	52	%
Packaging	41	%
Plastics	6	%
Paper	1	%

The product includes partial articles which contain substances listed in the Candidate List of REACH Regulation 1907/2006/EC (date: 25.01.2025) exceeding 0.1 percentage by mass: No

The *Candidate List* can be found on the *ECHA* website address: <https://echa.europa.eu/de/home>.

Reference service life

The reference service life of the sliding door system MUTO amount to 15 years, depending on the application and frequency of use. For repairs and renewals, suitable spare parts are available. The sliding door system MUTO is tested and designed to withstand a minimum of 1.500.000 cycles.

LCA: Calculation rules

Declared Unit

The declared unit is 1 piece of the product: Sliding door system MUTO including packaging

Name	Value	Unit
Declared unit	1	piece/product
Mass of declared Product without Packaging	27.72	kg
Mass of Packaging	16.00	kg
Total mass of declared product	38.72	kg

System boundary

The type of EPD is: cradle to gate with options, modules C1–C4, and module D (A1–A3 + C + D and additional modules: A4+ A5)

Production - Module A1-A3

The product stage includes: — A1, raw material extraction, processing and mechanical treatments, processing of secondary material input (e.g. recycling processes), — A2, transport to the manufacturer, — A3, manufacturing and assembly including provision of all materials, products and energy, as well as waste processing up to the end-of-waste state.

Construction stage - Modules A4-A5

The construction process stage includes:
— A4, transport to the building site; — A5, installation into the building; including provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction process stage.

End-of-life stage– Modules C1-C4 and D

The end-of-life stage includes: — C1, de-construction, demolition; — C2, transport to waste processing; — C3, waste processing for reuse, recovery and/or recycling; — C4, disposal; including provision and all transport, provision of all materials, products and related energy and water use. Module D (Benefits and loads beyond the system boundary) includes: — D, recycling potentials, expressed as net impacts and benefits.

Geographic Representativeness

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Global

Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account. Background database: GaBi, CUP 2024.2.

LCA: Scenarios and additional technical information

Characteristic product properties of biogenic carbon

Name	Value	Unit
Biogenic carbon content in product	0.07	kg C
Biogenic carbon content in accompanying packaging	5.89	kg C

Note: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO₂.

Reamstone (USA) is considered for A3.

Transport to the building site (A4)

Name	Value	Unit
Litres of fuel	0.00276	l/100km
Transport distance	100	km
Capacity utilisation (including empty runs)	55	%

The product is transported via truck. The main distribution regions is US. In order to allow scaling to a specific point of installation 100 km is declared.

Installation into the building (A5)

Name	Value	Unit
Waste packaging (paper)	16	kg

Reference service life

Name	Value	Unit
Life Span according to the manufacturer	15	a

End of life (C1-C4)

C1: The product dismantling from the building is done manually without environmental burden.

C2: Transport to waste management is 50 km.

Name	Value	Unit
Collected separately waste type	22.7	kg
Recycling	20.5	kg
Energy recovery	2.19	kg

The product is disassembled in a recycling process. Material recycling is then assumed for metals. The plastic components are assumed to be incinerated with energy recovery. Minor proportions of residues arising from the recycling process are landfilled. Region for the End of Life is: Global.

Reuse, recovery and/or recycling potentials (D), relevant scenario information

Name	Value	Unit
Recycling	100	%

The collection rate is 100 %.

LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MNR	MNR	MNR	MND	MND	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 piece Sliding door system MUTO

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq	2.04E+02	3.39E-01	2.27E+01	0	9.94E-02	5.93E+00	0	-1.31E+02
GWP-fossil	kg CO ₂ eq	2.28E+02	3.24E-01	5.68E-01	0	9.5E-02	5.57E+00	0	-1.3E+02
GWP-biogenic	kg CO ₂ eq	-2.41E+01	1.5E-02	2.21E+01	0	4.39E-03	3.59E-01	0	-4.17E-01
GWP-luluc	kg CO ₂ eq	1.3E-01	7.7E-06	3.73E-04	0	2.26E-06	3.18E-04	0	-2.48E-02
ODP	kg CFC11 eq	3.01E-09	3.42E-17	4.09E-15	0	1E-17	2.85E-15	0	-1E-09
AP	mol H ⁺ eq	1.04E+00	3.24E-04	6.35E-03	0	9.5E-05	1.04E-03	0	-4.77E-01
EP-freshwater	kg P eq	5.45E-04	6.93E-08	8E-07	0	2.03E-08	4.54E-07	0	-7.18E-05
EP-marine	kg N eq	1.81E-01	1.03E-04	2.29E-03	0	3.02E-05	2.4E-04	0	-6.35E-02
EP-terrestrial	mol N eq	1.94E+00	1.15E-03	2.86E-02	0	3.36E-04	4.76E-03	0	-6.9E-01
POCP	kg NMVOC eq	5.46E-01	2.91E-04	6.08E-03	0	8.55E-05	6.64E-04	0	-1.99E-01
ADPE	kg Sb eq	2.96E-05	9.71E-09	6.46E-08	0	2.85E-09	3.92E-08	0	-3.61E-05
ADPF	MJ	3.07E+03	4.59E+00	7.16E+00	0	1.35E+00	2.66E+00	0	-1.9E+03
WDP	m ³ world eq deprived	3.06E+01	6.34E-04	2.81E+00	0	1.86E-04	6.07E-01	0	-6.19E+00

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources; WDP = Water (user) deprivation potential

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 piece Sliding door system MUTO

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	1.33E+03	1.45E-02	1.93E+02	0	4.25E-03	3.09E+00	0	-8.85E+02
PERM	MJ	1.94E+02	0	-1.92E+02	0	0	-2.4E+00	0	0
PERT	MJ	1.53E+03	1.45E-02	1.3E+00	0	4.25E-03	6.86E-01	0	-8.85E+02
PENRE	MJ	3E+03	4.59E+00	7.16E+00	0	1.35E+00	7.44E+01	0	-1.91E+03
PENRM	MJ	7.18E+01	0	0	0	0	-7.18E+01	0	0
PENRT	MJ	3.07E+03	4.59E+00	7.16E+00	0	1.35E+00	2.66E+00	0	-1.91E+03
SM	kg	7.68E-03	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m ³	2.66E+00	2.6E-05	6.62E-02	0	7.62E-06	1.45E-02	0	-1.51E+00

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

RESULTS OF THE LCA - WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 piece Sliding door system MUTO

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	2.97E-05	4.46E-10	1.06E-08	0	1.31E-10	9.89E-09	0	-8.69E-07
NHWD	kg	5.14E+01	4.7E-04	7.11E-01	0	1.38E-04	5.81E-01	0	-3.35E+01
RWD	kg	1.59E-01	4.93E-06	3.76E-04	0	1.45E-06	1E-04	0	-2.13E-01
CRU	kg	0	0	0	0	0	0	0	0
MFR	kg	0	0	0	0	0	2.03E+01	0	0
MER	kg	0	0	0	0	0	0	0	0
EEE	MJ	0	0	3.43E+01	0	0	1.08E+01	0	0
EET	MJ	0	0	6.22E+01	0	0	2.46E+01	0	0

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional:

1 piece Sliding door system MUTO

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PM	Disease incidence	1E-05	1.7E-09	3.52E-08	0	5E-10	1.29E-08	0	-7.63E-06
IR	kBq U235 eq	3.14E+01	7.05E-04	5.82E-02	0	2.07E-04	9.33E-03	0	-4.27E+01
ETP-fw	CTUe	1.22E+03	3.25E+00	3.4E+00	0	9.55E-01	1E+00	0	-7.01E+02
HTP-c	CTUh	1.27E-07	6.12E-11	1.8E-10	0	1.8E-11	8.61E-11	0	-3.41E-08
HTP-nc	CTUh	2.59E-06	2.62E-09	7.79E-09	0	7.68E-10	8.57E-09	0	-9.28E-07
SQP	SQP	3.22E+03	1.18E-02	1.9E+00	0	3.46E-03	7.95E-01	0	-7.44E+01

PM = Potential incidence of disease due to PM emissions; IR = Potential Human exposure efficiency relative to U235; ETP-fw = Potential comparative Toxic Unit for ecosystems; HTP-c = Potential comparative Toxic Unit for humans (cancerogenic); HTP-nc = Potential comparative Toxic Unit for humans (not cancerogenic); SQP = Potential soil quality index

Disclaimer 1 – for the indicator “Potential Human exposure efficiency relative to U235”. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure or radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – for the indicators “abiotic depletion potential for non-fossil resources”, “abiotic depletion potential for fossil resources”, “water (user) deprivation potential, deprivation-weighted water consumption”, “potential comparative toxic unit for ecosystems”, “potential comparative toxic unit for humans – cancerogenic”, “Potential comparative toxic unit for humans - not cancerogenic”, “potential soil quality index”. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high as there is limited experience with the indicator.

This EPD was created using a software tool.

References

ADA

Americans with Disabilities Act 1990
<https://www.ada.gov/>

STC

Sound Transmission Class
<https://asastandards.org/terms/sound-transmission-class/>

EN 15804

EN 15804+A2:2019+AC:2021,
Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

ISO 14025

14025:201110, Environmental labels and declarations — Type III environmental declarations- Principles and procedures

REACH

Regulation (EC) No 1907/2006 of the European Parliament and of the Council on the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

Further References

IBU 2021

General Instructions for the EPD programme of Institut Bauen und Umwelt e.V. Version 2.0, Berlin: Institut Bauen und Umwelt e.V., 2021. www.ibu-epd.com

GaBi ts software

Sphera Solutions GmbH

Gabi Software System and Database for Life Cycle Engineering
19922020

Version 10.0.0.71

University of Stuttgart

Leinfelden-Echterdingen

GaBi ts documentation

GaBi life cycle inventory data documentation
(<https://www.gabisoftware.com/support/gabi/gabidatabase-2020-lcidocumentation/>).

LCA-tool dormakaba

Tool No.: IBU-DOR-202106-LT1-EN

Developed by Sphera Solutions GmbH

PCR Part A

PCR – Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report according to EN 15804+A2:2019,
Version 1.0, 2020, Institut Bauen und Umwelt e.V., www.ibu-epd.com.

PCR Part B

PCR – Part B: Requirements on the EPD for Building Hardware product, version 08/2021, Institut Bauen und Umwelt e.V., www.ibu-epd.com.



Publisher

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com



Programme holder

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com



Author of the Life Cycle Assessment

dormakaba International Holding GmbH
DORMA Platz 1
58256 Ennepetal
Germany

+49 2333 793-0
info.de@dormakaba.com
www.dormakaba.com



Owner of the Declaration

dormakaba International Holding GmbH
DORMA Platz 1
58256 Ennepetal
Germany

+49 2333 793-0
info.de@dormakaba.com
www.dormakaba.com