

DL 200 / 300 Mortise lock series

Key Figures

Lifetime per unit: 15 years
Weight per unit: 1.4 kg
Production location: Guangdong Province, China

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			


Material used (%)

■ Stainless steel ■ Steel ■ Paper ■ Plastic

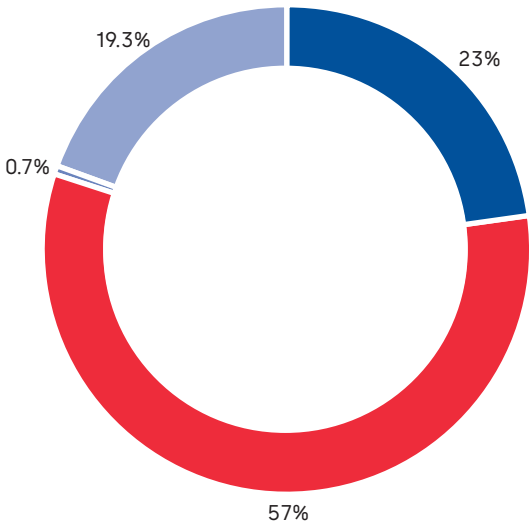

The GWP¹ across the life cycle is 2 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Zürich airport

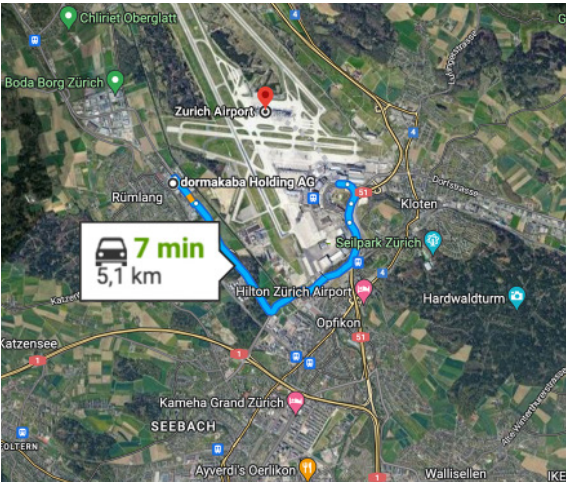

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

dormakaba mortise lock series DL 200 / 300 for timber and steel doors. DL 200 / 300 is a complementary EuroSize lockset series. A range of mechanically operated locks for doors in buildings. A complete range of highquality products and functional reliability. With the use of highgrade materials, precise production techniques and a comprehensive quality management system, all dormakaba locks meet demanding technical specifications.

Total Global Warming Potential per life cycle stage (kg CO₂e)

