

Panic and deadbolt Locking device

Key Figures

Lifetime per unit: 10 years
Weight per unit: 12.9 kg
Production location: Reamstown, USA


Production standards

Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			✓

Product declarations


Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)

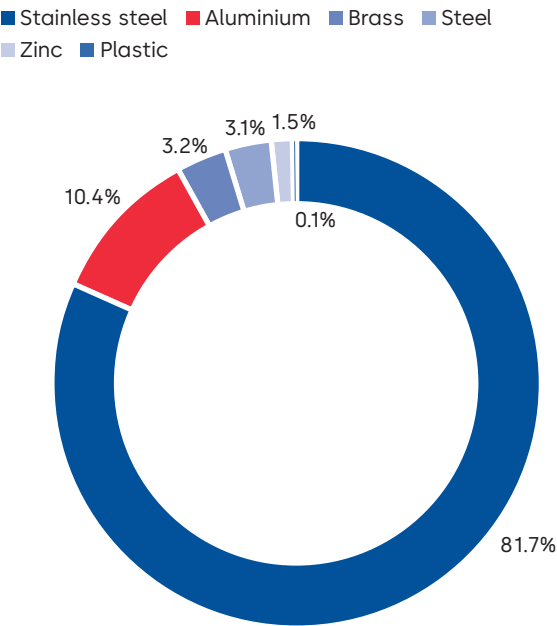

The GWP¹ across the life cycle is 43 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Ennepetal to Bielefeld

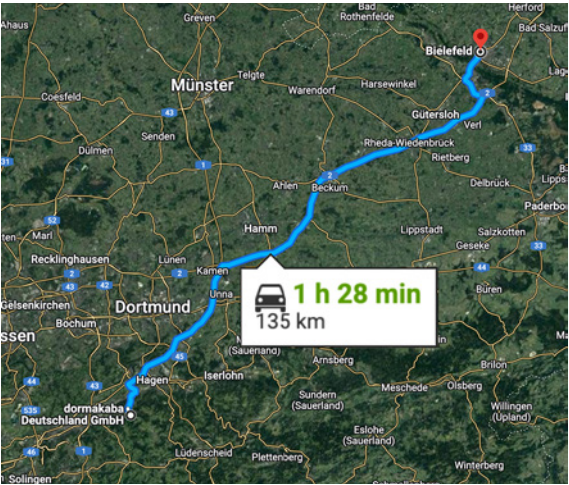


¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.

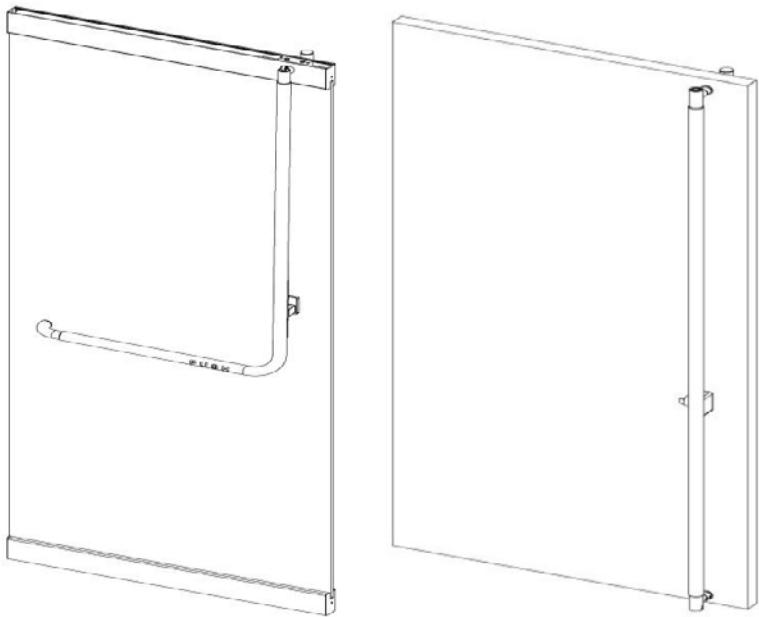

Description

GP Series panic and deadbolt locking device accentuates glass entrance doors with its sleek minimal tubular housing while preserving a glass door's aesthetics. Versatile, durable, and handsomely styled to accommodate sophisticated architectural designs. dormakaba offers a complete glass exit device line manufactured on the east coast.

Total Global Warming Potential per life cycle stage (kg CO₂e)

