

# Access manager 92 00

## Online access control

### Key Figures

Lifetime per unit: 15 years  
Weight per unit: 0.25 kg  
Electricity use per year: 54 kWh  
Production location: Villingen-Schwenningen, Germany

### Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

### Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓		✓	


### Material used (%)

■ Electronics ■ Paper ■ Plastics

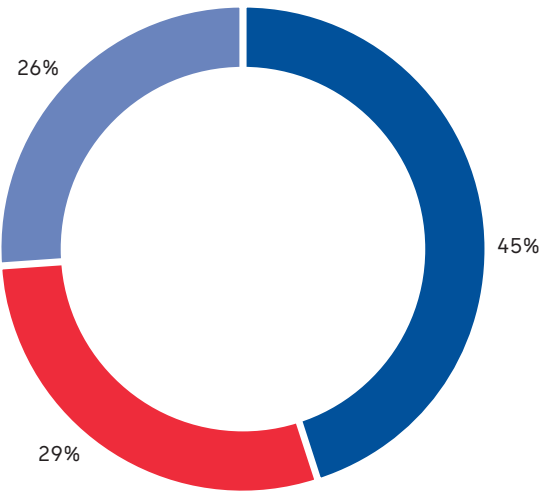

### The GWP<sup>1</sup> across the life cycle is 419 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Chicago to New York

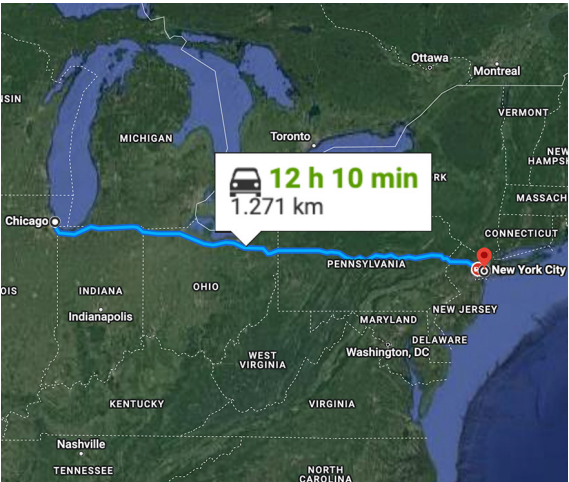

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



### Description

The dormakaba access manager 92 00 fulfils all the requirements of modern security systems. With its intelligent decision logic and ability to be freely parametrised, it can control simple types of access points as well as more complex entrances to highly sensitive areas. With integrated mobile access, the access system allows access via smartphone. The control electronics integrate everything that is required to enable a connection to cloud services via IoT.

### Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

