

Remote reader 91 15

Access control device

Key Figures

Lifetime per unit: 12 years
Weight per unit: 0.185 kg
Electricity use per year: 13.5 kWh
Production location: Villingen-Schwenningen, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓		✓	


Material used (%)

■ Electronics ■ Paper ■ Plastics

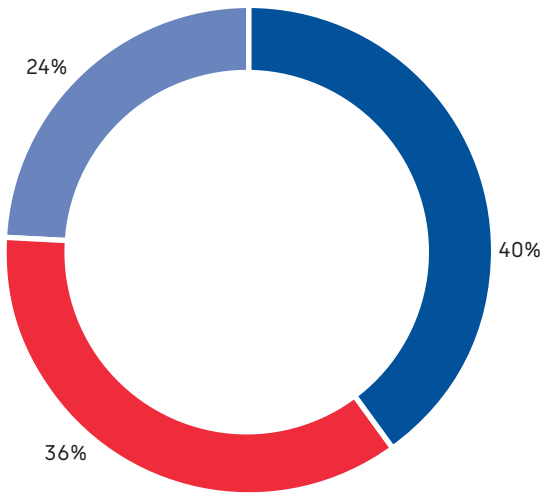

The GWP¹ across the life cycle is 69 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Brussels to Cologne

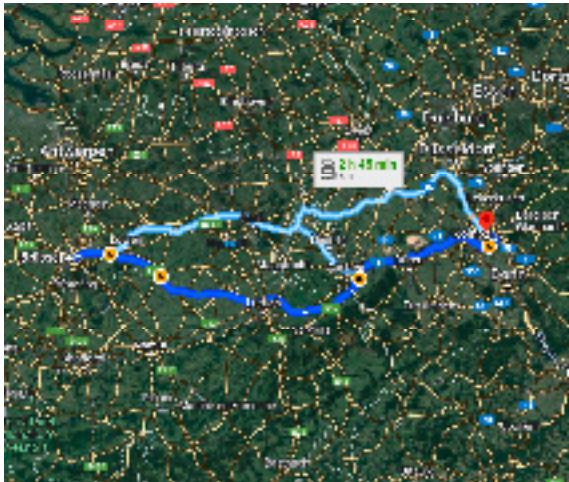

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The dormakaba Remote reader 91 15 offers the benefit of separating the registration unit and door control unit. This makes it suitable for installation in protected internal areas to control access points located in nonprotected external areas. Thanks to its flexible integration, the dormakaba Remote reader 91 15 can be integrated into all dormakaba systems, whether online, CardLink or stand-alone operation. The communication is encrypted, offering a high level of security.

Total Global Warming Potential per life cycle stage (kg CO₂e)

