

# Access manager 92 30

## Online access control

### Key Figures

**Lifetime per unit:** 15 years  
**Weight per unit:** 0.92 kg  
**Electricity use per year:** 54 kWh  
**Production location:** Villingen-Schwenningen, Germany

### Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

### Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

### Material used (%)

■ Plastic ■ Paper ■ Electronics ■ Steel

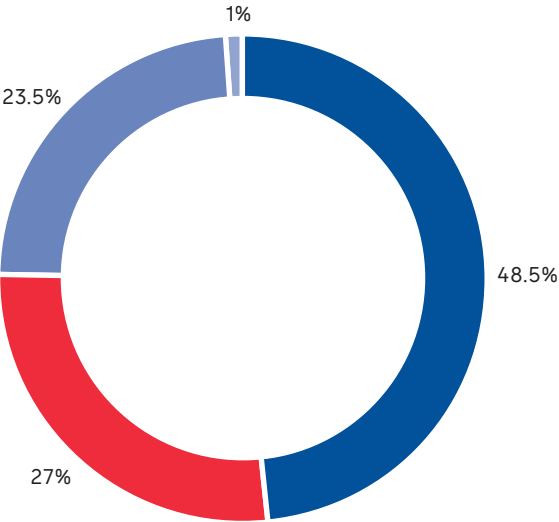

### The GWP<sup>1</sup> across the life cycle is 429 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a roundtrip flight from Paris to Rome (2,200 km)



<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



### Description

The dormakaba Access Manager 92 30 is a highperformance access control system, optimised for single access points. Thanks to its intelligent decision logic and ability to be freely parametrised, the Access Manager can control simple types of access as well as more complex entrance and exit door configurations. Based on the latest operating system and TLS encryption between the controller and host system, the IT security is state-of-the-art.

### Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

