

BEST 1E Series Mortise and rim cylinders

Key Figures

Lifetime per unit: 40,000 cycles
Weight per unit: 0.3 kg
Production location: Indianapolis, US

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		

Material used (%)


■ Brass ■ Stainless steel ■ Steel
■ Paper ■ Other

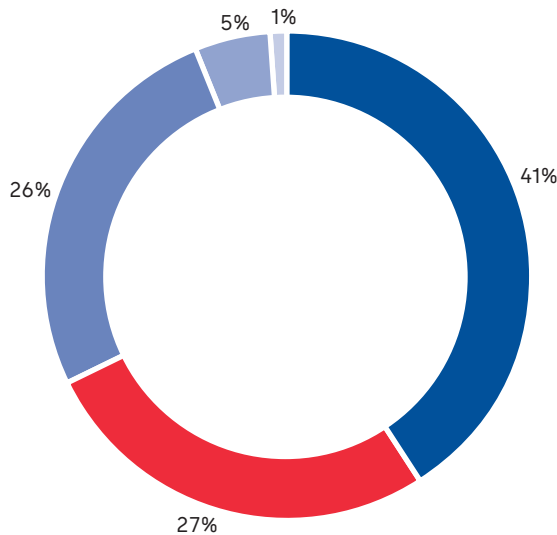

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 6.9 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Wetzikon

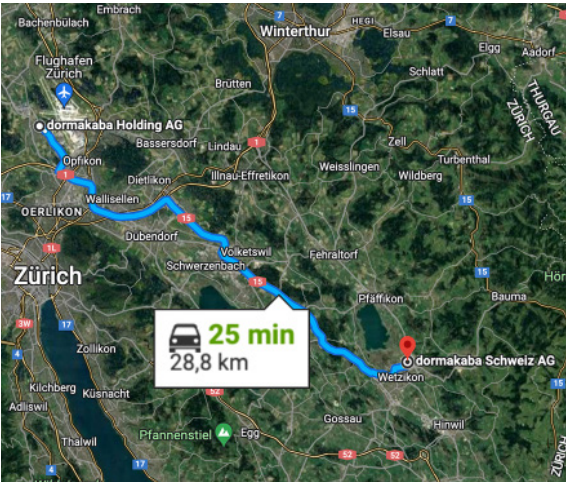

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

BEST mortise and rim cylinders may be altered to function with other manufacturers' locks by use of different cams and different cylinder rings. Special cylinder variations are available for most applications. BEST cylinders are machined from brass or bronze bar stock and are available in a variety of finishes.

Total Global Warming Potential per life cycle stage (kg CO₂e)

