

# BTS 75 V, BTS 75 R, RTS 87 Floor Spring

## Key Figures

Lifetime per unit: 20 years  
Weight per unit: 2.9 kg  
Production location: Singapore

## Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	

## Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		✓


## Material used (%)

Steel Aluminium Zinc Oil Other

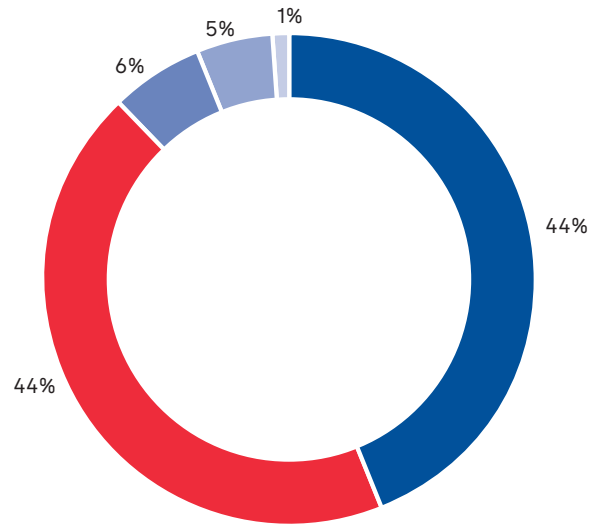

## The GWP<sup>1</sup> across the life cycle is 7 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Rümlang to Wetzikon

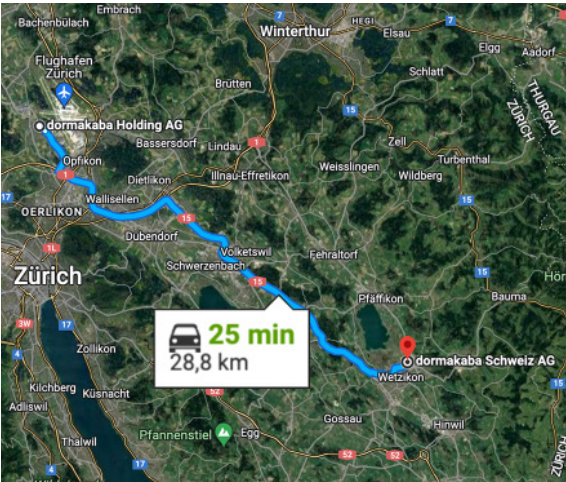

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



## Description

dormakaba's floor spring and transom concealed door closers BTS 75 V, BTS 75 R and RTS 87 are our flexible door closers integrated in the frame or floor and can be used for almost all single-action and swing doors. With their individual functions, the door closers fulfil a wide range of requirements, and do so with the greatest possible reliability thanks to high quality.

## Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

