

Crane AL 1000 / 2000 / 3000 Automatic revolving door

Key Figures

Lifetime per unit: 20 years
Weight per unit: 896 kg
Electricity use per year: 1964.5 kWh
Production location: Reamstown, USA

Production standards


| Quality | Environmental | Occupational Health & Safety | Energy | Produced with green electricity |
|--------------------|---------------------|------------------------------|--------|---------------------------------|
| ISO 9001 certified | ISO 14001 certified | | | ✓ |

Product declarations

| Environmental Product Declaration | Health Product Declaration | Building Product Declaration | SuPIM Data Sheet |
|-----------------------------------|----------------------------|------------------------------|------------------|
| ✓ | ✓ | | ✓ |

Material used (%)

■ Glass ■ Aluminium ■ Electronics ■ Zinc
■ Plastic

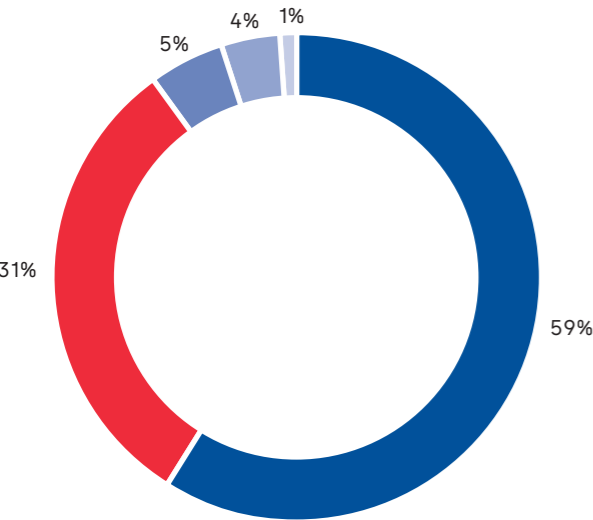

The GWP¹ across the life cycle is 24,901 kg CO₂e

This is similar to the CO₂ produced from three roundtrip flights from New York to Singapore (92,100 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The Crane Automatic Revolving Door 1000 / 2000 / 3000 is designed as a building's primary entrance. A range of available finishes allows the integration into its surrounding décor and architecture. The technical and safety features ensure smooth and safe traffic flow. The Crane 1000 / 2000 / 3000 doors feature the same automatic drive system.

Total Global Warming Potential per life cycle stage (kg CO₂e)

