

CenconX Electronic Safe Lock

Key Figures

Lifetime per unit: 7 years
Weight per unit: 0.6 kg
Electricity use per year: 0.005 kWh
Production location: Nogales, Mexico

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

Product declarations / certifications

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	Other
✓	✓		

Material used (%)

Zinc Plastics Electronics Steel

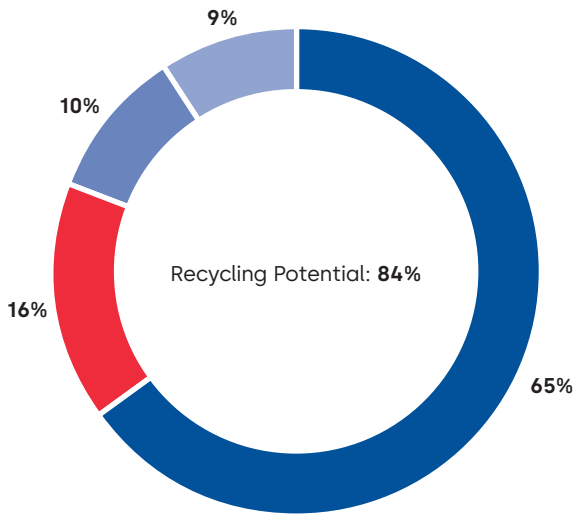

The PCF¹ across the life cycle is 13 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Nogales to Tepeaca (≈ 76 km).




Scan the QR code or click here for more information about our sustainability product declarations.



Scan the QR code or click here for more information about this product.



Product carbon footprint per life cycle stage (kg CO₂e)

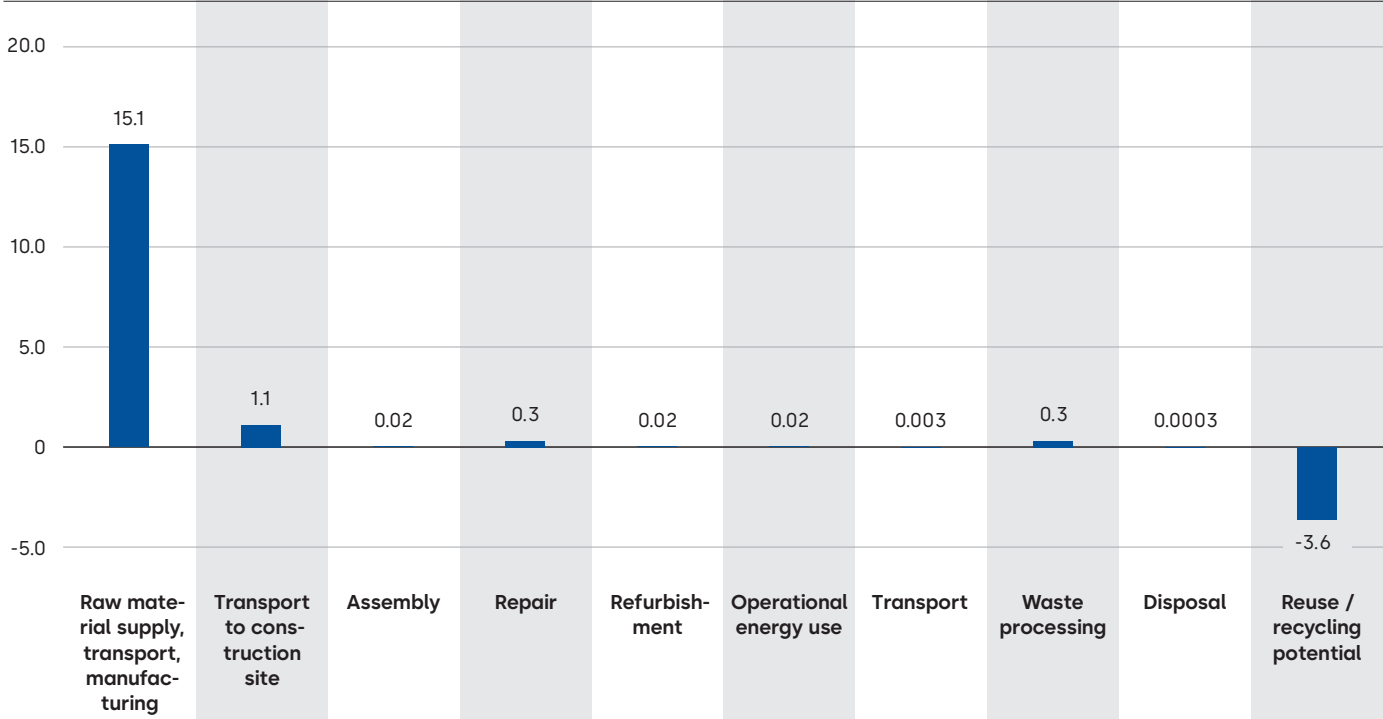

¹ Carbon dioxide equivalent (CO₂e) is a standard unit of measurement used to express the climate impact of greenhouse gas emissions by converting them into the amount of carbon dioxide that would produce the same global warming effect, based on their global warming potential (GWP). It is widely used in product carbon footprint (PCF) calculations to compare and aggregate emissions of different greenhouse gases on a common basis.