

# Kentaur FTS

## Full height turnstiles

### Key Figures

**Lifetime per unit:** 15 years  
**Weight per unit:** 306 kg  
**Electricity use per year:** 93 kWh  
**Production location:** Bühl, Germany

### Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

### Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		✓


### Material used (%)

Steel Aluminium Electronics Plastic  
Paper Cement

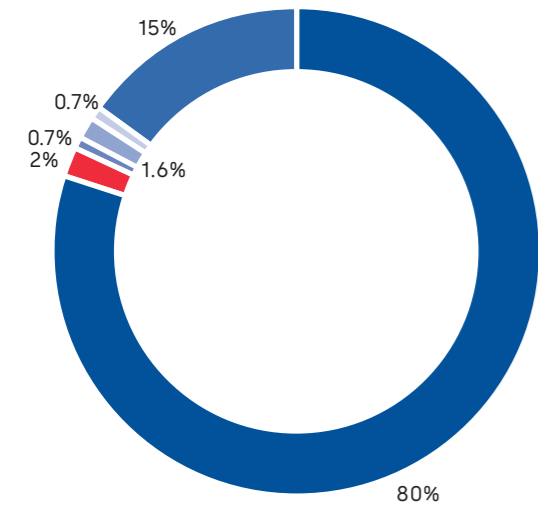

### The GWP<sup>1</sup> across the life cycle is 970 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a roundtrip flight from Oslo to Lisbon (5,500 km)

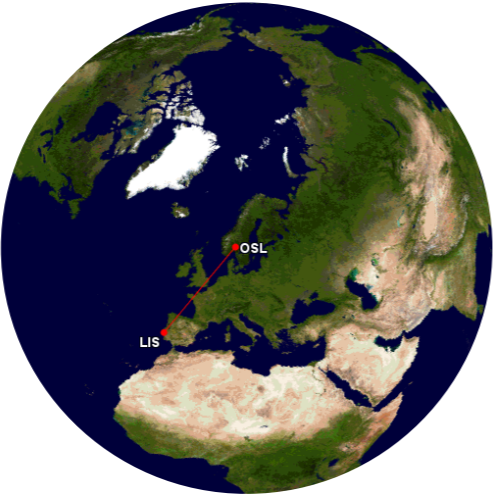


<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.

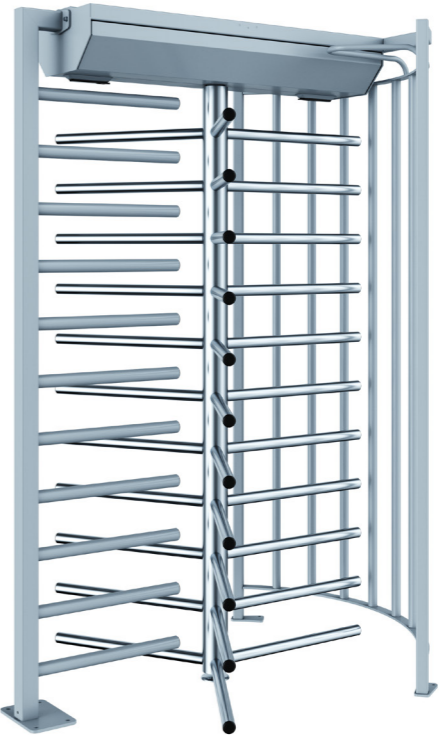

### Description

The robust Kentaur Full-Height Turnstiles are especially suitable for securing the perimeter of buildings and property. Versatile versions enable individual combinations of multiple units to be put together. The end point locking system developed by dormakaba prevents people from being trapped in the gates.

### Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

