

BTS 65 Floor Spring

Key Figures

Lifetime per unit: 20 years

Weight per unit: 4 kg

Production location: Suzhou, China

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		


Material used (%)

■ Steel ■ Zinc ■ Oil ■ Paper ■ Aluminium

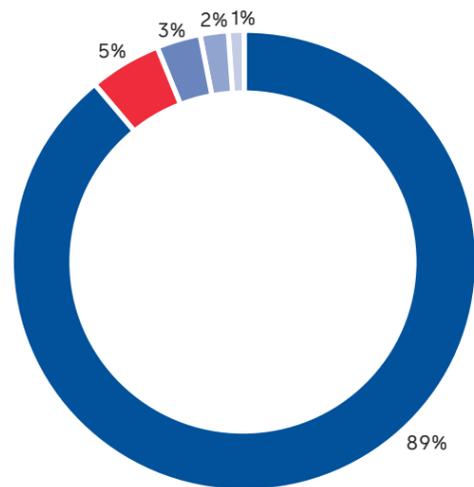

The GWP¹ across the life cycle is 8 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Wetzikon

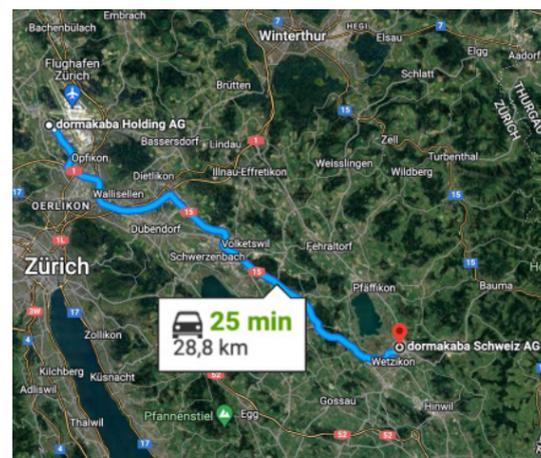


¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.

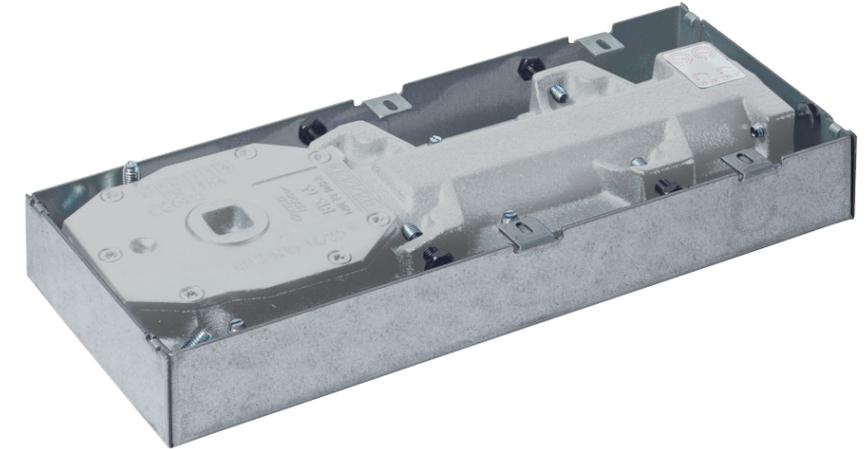

Description

The economic floor spring specially designed for double action doors. The BTS 65 offers a particularly shallow design and thus all the advantages of a reduced installation depth. With two closing ranges and a choice of models, the BTS 65 can fulfil virtually any application requirement while providing all the reliability associated with assured quality.

Total Global Warming Potential per life cycle stage (kg CO₂e)

