

# Kerberos-E01 Tripod Barrier

## Key Figures

Lifetime per unit: 15 years  
Weight per unit: 58.1 kg  
Electricity use per year: 74.1 kWh  
Production location: Bühl, Germany

## Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

## Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

## Material used (%)

Steel Paper Plastic Aluminium Electronics

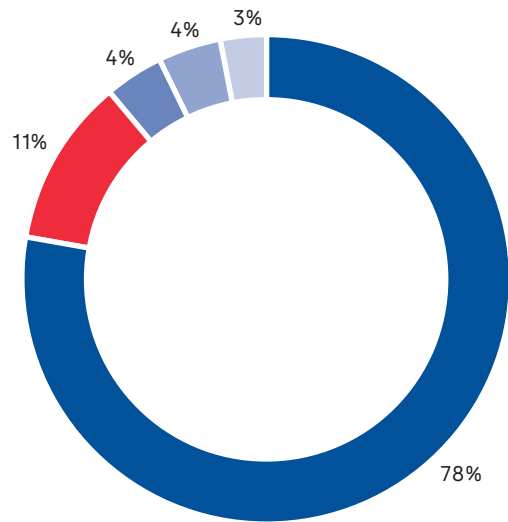

## The GWP<sup>1</sup> across the life cycle is 615 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a roundtrip flight from Paris to Oslo (2,700 km)



<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



## Description

Kerberos-E01 Tripod barriers can be used for access control. They regulate the flow of people with ease, even during the busiest periods of the day. dormakaba tripod barriers are compatible with all types of ID readers and are available in different designs. In emergencies, designs with collapsible bars in both directions create an escape route.

## Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

