

Geryon K8

Security revolving door

Key Figures

Lifetime per unit: 20 years
Weight per unit: 459 kg
Electricity use per year: 131 kWh
Production location: Bühl, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		

Material used (%)

■ Glass ■ Aluminium ■ Stainless ■ Copper
■ Plastic ■ Electronics ■ Paper

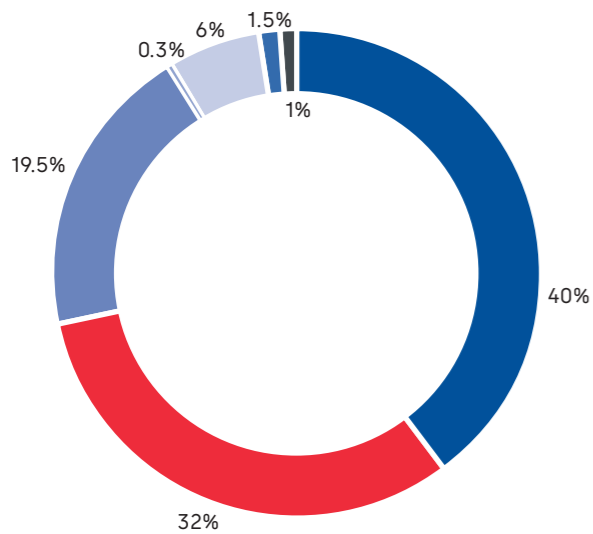

The GWP¹ across the life cycle is 2,137 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Montreal to Berlin (12,100 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

Owing to the high transparency grade of the glass elements and a wide variety of colours for the metal parts, all models elegantly blend in with their surroundings. A sophisticated sensor system in compliance with the latest standards prevents users from being injured.

Total Global Warming Potential per life cycle stage (kg CO₂e)

