

KTC 2

Automatic Revolving Door

Key Figures

Lifetime per unit: 20 years
Weight per unit: 2,445 kg
Electricity use per year: 936 kWh
Production location: Suzhou, China

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified		ISO 50001 certified	

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓	✓	✓

Material used (%)

■ Glass ■ Aluminium ■ Steel ■ Wood
■ Plastic ■ Electronics ■ Paper

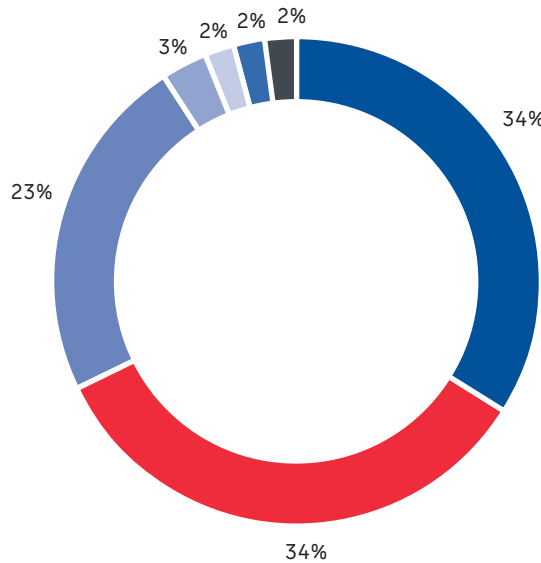

The GWP¹ across the life cycle is 33,983 kg CO₂e

This is similar to the CO₂ produced from three roundtrip flights from New York to Singapore (92,100 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

KTC 2 revolving door systems with integrated automatic sliding door offer a wide range of adjustment possibilities. Due to changing access requirements of large buildings over the course of the day and during the evening a versatile door system that is quickly adaptable to these requirements is the ideal solution.

Total Global Warming Potential per life cycle stage (kg CO₂e)

