

# Remote reader 91 25

## Access control device

### Key Figures

**Lifetime per unit:** 15 years  
**Weight per unit:** 0.25 kg  
**Electricity use per year:** 13.5 kWh  
**Production location:** Villingen-Schwenningen, Germany

### Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified		✓

### Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓		✓	


### Material used (%)

■ Electronics ■ Paper ■ Plastics

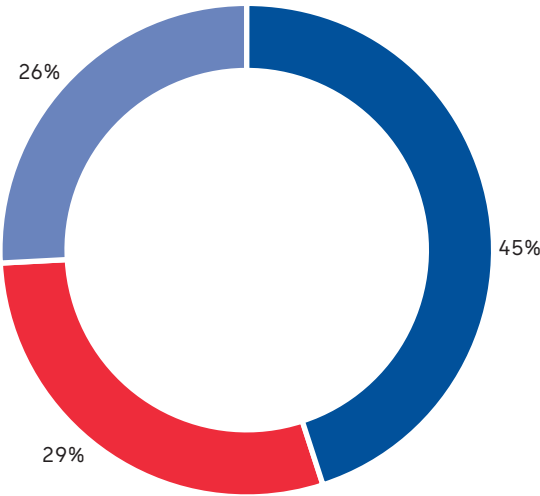

### The GWP<sup>1</sup> across the life cycle is 104 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Kuala to Singapore

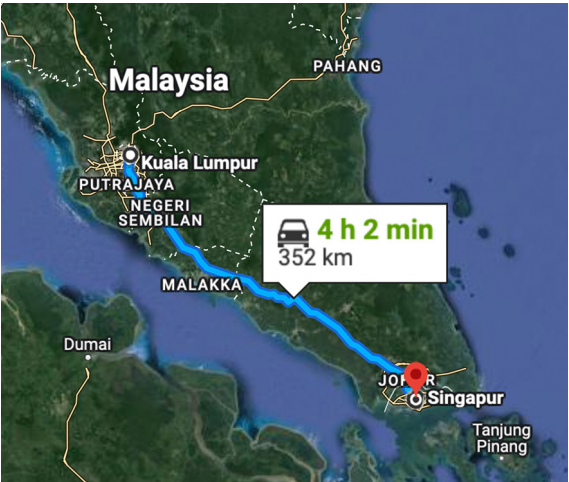


<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.

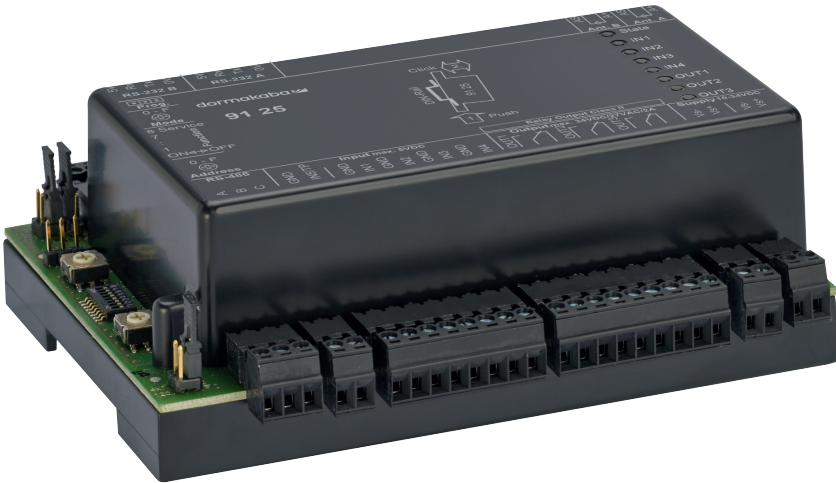

### Description

The dormakaba remote reader 91 25 is a powerful access control unit which monitors many access points. Thanks to an extensive range of operating modes, the dormakaba remote reader 91 25 supports all commonly implemented door configurations. Two registration units can be connected to one remote reader, meaning one reader is sufficient to achieve an in/out configuration.

### Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

