

Crane AL 1000 / 2000 / 3000 Manual revolving door

Key Figures

Lifetime per unit: 30 years
Weight per unit: 591 kg
Production location: Reamstown, USA

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		✓

Material used (%)

■ Glass ■ Aluminium ■ Steel ■ Zinc
■ Plastic

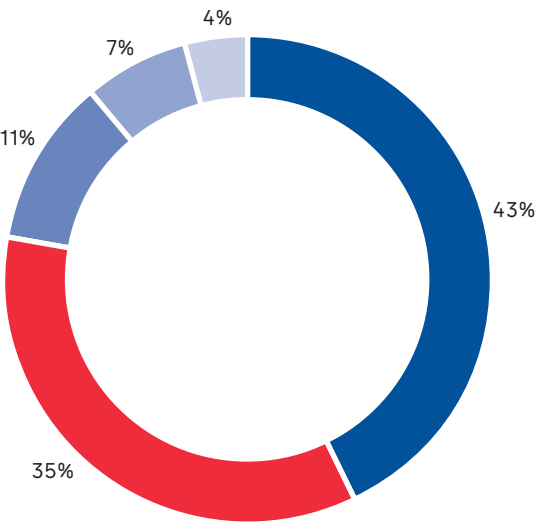

The GWP¹ across the life cycle is 1,855 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Atlanta to Iceland (10,700 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The Crane AL 1000 / 2000 / 3000 Manual Revolving Doors allow both greater traffic volume and quicker traffic flow compared to automatic or manual swing doors. Crane manual revolving doors are customizable revolving doors. They enable a continuous flow of traffic, especially in entrance areas, and at the same time block the ingress of air from outside. A wide selection of finishes is available to meet project needs.

Total Global Warming Potential per life cycle stage (kg CO₂e)

