

# SVx 2000 (F) Motor locks

## Key Figures

**Lifetime per unit:** 20 years  
**Weight per unit:** 1 kg  
**Electricity use per year:** 7.6 kWh  
**Production location:** Ennepetal, Germany

## Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

## Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			


## Material used (%)

Steel Stainless steel Paper  
Electronics Plastic

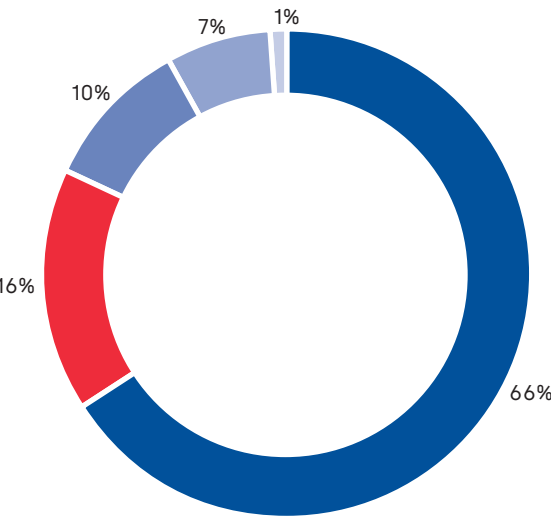

## The GWP<sup>1</sup> across the life cycle is 43.7 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Ennepetal to Bielefeld

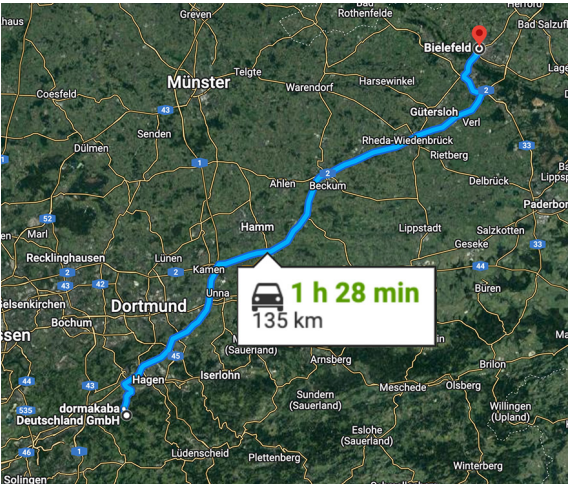

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



## Description

The new generation of dormakaba SVP emergency escape locks is ideally suited for use in emergency exits and scape routes, as well as in fire and smoke doors. Any door can be safely protected with the emergency escape function and the self-locking action.

## Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

