

ITS 915 and ITS 900 Integrated door closer

Key Figures

Lifetime per unit: 20 years
Weight per unit: 2 kg
Production location: Singapore

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		


Material used (%)

Steel Aluminium Paper Oil
Plastic Zinc Paint Other

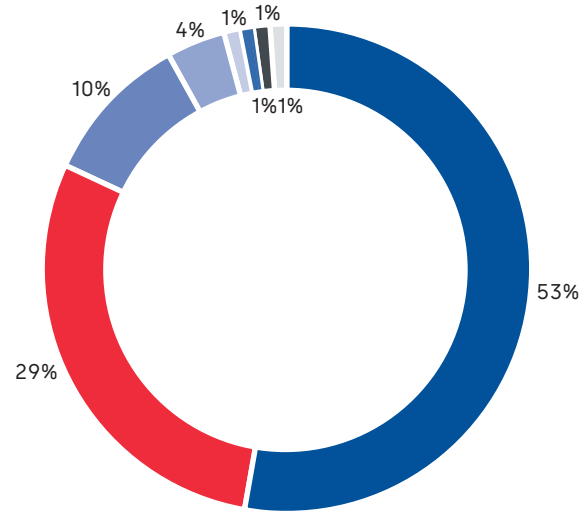

The GWP¹ across the life cycle is 7 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Wetzikon

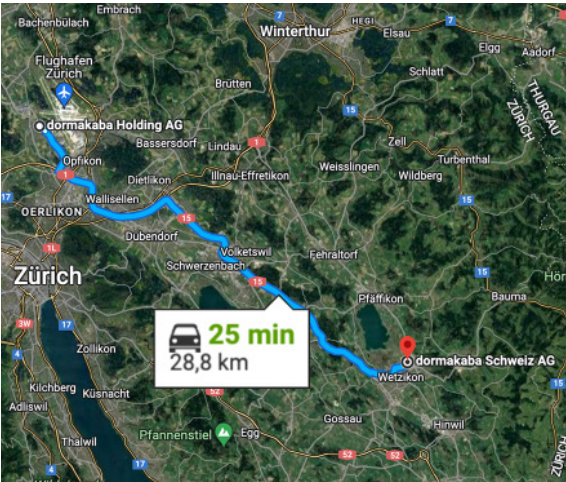

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

ITS 915 / ITS 900 cam-action door closer is designed and manufactured to high quality standards to meet the growing demand for an economical solution of high performance concealed overhead door closer with standard features. As a concealed door closer ITS 915 / 900 can be installed directly in the door or frame, making it virtually invisible. The compact design of the closer body and slide-channel allow the door to maintain a high level of integrity.

Total Global Warming Potential per life cycle stage (kg CO₂e)

