

ES 200

Automatic sliding door operator

Key Figures

Lifetime per unit: 10 years

Weight per unit: 40.4 kg

Electricity use per year: 189 kWh

Production location: Ennepetal, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓	✓	✓

Material used (%)

■ Aluminium ■ Steel ■ Electronics
■ Paper ■ Plastic

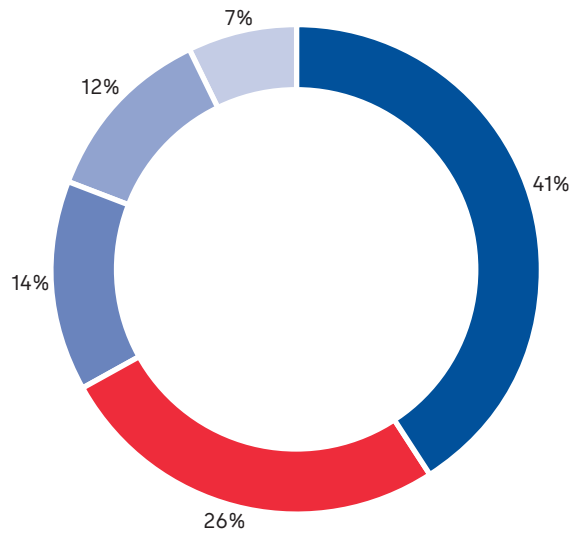

The GWP¹ across the life cycle is 879 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Madrid to Athens (4,800 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The automatic sliding door operator is a solution for any fields of application and scope of operation. The ES 200 allows dormakaba to supply a drive system that covers all applications due to its modular construction with a low number of components.

Total Global Warming Potential per life cycle stage (kg CO₂e)

