

KTV A

Automatic revolving door

Key Figures

Lifetime per unit: 20 years
Weight per unit: 925 kg
Electricity use per year: 177 kWh
Production location: Sofia, Bulgaria


Production standards

Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations


Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓	✓	✓

Material used (%)

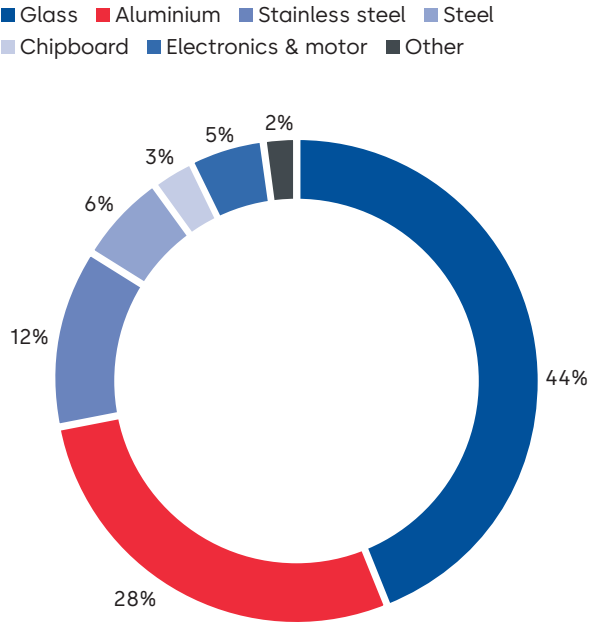

The GWP¹ across the life cycle is 3,607 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Mexico city to Hanoi (20,400 km)

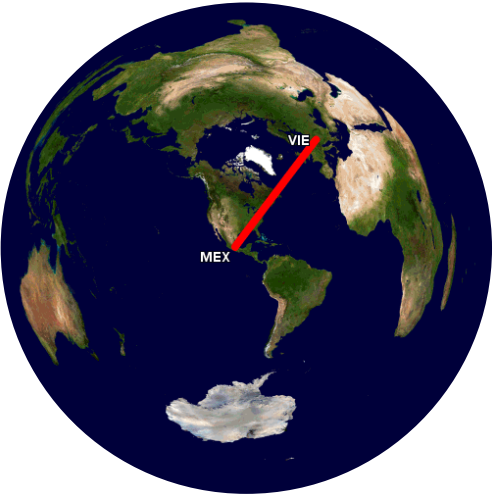

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

KTV A revolving doors hold back noise, dust and dirt, reliably protect people in the vicinity of the entrances from drafts, and help to keep heating costs down. KTV A doors are exceptionally versatile. Any inside diameter of the door can be supplied from 2000 – 3800 mm.

Total Global Warming Potential per life cycle stage (kg CO₂e)

