




Meet the New KD Series™ 60–600kW

The KD Series™ 60–600 kW marks the next evolution in Rehlko engineering. Rigorously tested and backed by global support, it delivers reliable power where failure is not an option.

The 60–600 kW range will roll out in three phases through 2027, expanding from initial models to a complete lineup designed to meet every power requirement.



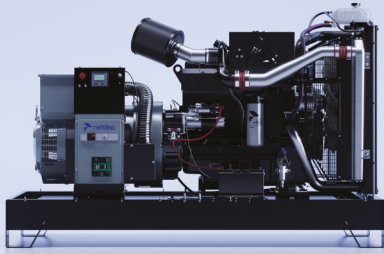

The all-new KD Series™ addition delivers unmatched dependability, setting the benchmark for a *new era of reliability*.

Rigorously tested beyond industry standards, it delivers proven reliability, thousands of site-ready configurations, and consistent global performance with local support—all while protecting long-term value.

Fully Integrated Rehlko System

Rehlko's KD Series™ 60–600 kW delivers a premium, fully integrated system built with world-class components. Designed to meet ISO8528–5 G3 load acceptance performance, it ensures rapid response and dependable performance. Ready to start when the grid stops.

Unmatched Build Quality

The rugged frame, sealed fuel tank, and steel enclosure provide leak protection and corrosion resistance in demanding conditions.

Short Lead Time

These generating sets are configured products available in stock, ready to ship and offering short lead-times.

Next-Generation Testing

Every model is prototyped and tested in our labs for thermal balance, noise levels, electrical safety, vibration and long-term performance. Nothing leaves without proving itself.

Thousands of Ways. One Standard of Reliability.

Extensive configuration options available, including voltage, frequency, enclosures, control systems, and modular accessories—built to match your site needs. Easily configured to meet regional codes, standards, and certification requirements.

Optimized Package

The conception of the range and the preconfigured equipment have been designed to allow you to benefit from the best value for money and to optimize your investment.

Premium parts & Services. Wherever You Are.

Tailored service contracts and extended warranty included to ensure long-term reliability and built-in support.

With numerous direct service locations and 220+ distributors worldwide, Rehlko customers have the assurance of 24/7 emergency service and responsive after-market support.



Contact Us

powersystems.rehlko.com/emea

	KD66 KD88 KD110	KD60U KD80U		KD130 KD165	KD100U KD120U KD150U		KD200 KD220 KD250	KD160U KD180U KD230U	
Frequency (Hz)	50	60		50	60		50	60	
Voltage (V)	400/230	208/120	380/220	400/230	208/120	380/220	400/230	208/120	380/220
Ratings (kVA ESP – kVA PRP)	66–60	75–68	75–68	130–118	119–108	109–99	200–182	201–183	200–182
	88–80	96–88	96–88	165–150	143–130	136–124	220–200	226–206	220–200
Ratings (kWe ESP – kWe PRR)	110–100				183–166	182–165	250–227	283–257	270–245
	53–48	60–54	60–54	104–94	95–86	87–79	160–146	161–146	160–146
	70–64	77–70	77–70	132–120	115–104	109–99	176–160	181–165	176–160
	88–80				146–133	146–132	200–182	226–206	216–196
Engine Brand	Rehlko			Rehko			Rehko		
Engine Details	3.9L – 4 Cylinders In Line			5.9L – 6 Cylinders In Line			8.3L – 6 Cylinders In Line		
	1500 RPM	1800 RPM		1500 RPM	1800 RPM		1500 RPM	1800 RPM	
Open/Enclosure Dimensions L x W x H (m)	1.89x1.07x1.31/ 2.47x1.11x1.46 (M147)			2.15x1.10x1.53/ 2.94x1.15x1.61 (M148)			2.50x1.10x1.64/ 3.59x1.15x1.90 (M149)		
Controllers	APM303/ APM403	APM303		APM303/ APM403	APM303		APM303/ APM403	APM303	
Standard Tank Capacity (L)	181			256			344		
Sound Levels dB(A)@1m – Enclosed	80	85–86		79–81	84–87		80–81	84–88	