

JA SOLAR MODULE PRODUCT

LIMITED WARRANTY



This Limited Warranty for JA Solar Brand Crystalline Solar PV Modules (hereinafter referred to as "Limited Warranty") is issued by JA Solar Technology Co., Ltd. (JA SOLAR TECHNOLOGY CO., LTD.), which is headquartered at Building No.8, Nuode Center, Automobile Museum East Road, Fengtai District, Beijing, China (100160), or its legal successors or assigns (hereinafter collectively referred to as "JA Solar"), and applies exclusively to Modules (as defined in Section 1 hereof).

01. Definition of Modules:

Modules are defined in this Limited Warranty as photovoltaic solar modules manufactured by JA Solar or its authorized manufacturers, legitimately bearing "JA Solar" brand, that are of the following product types:

Mono-crystalline single glass products:

JAMXXS10-XXX/XX; JAMXXS20-XXX/XX; JAMXXS21-XXX/XX; JAMXXS30-XXX/XX; JAMXXS31-XXX/XX; JAM72S17-XXX/GR

Mono-crystalline double glass products:

JAMXXD10-XXX/XX; JAMXXD20-XXX/XX; JAMXXD21-XXX/XX; JAMXXD30-XXX/XX; JAMXXD31-XXX/XX; JAMXXD4X-XXX/XX;

Note: "X" represents different types of product and different power class.

02. Effective Date, Beneficiary and Warranty Start Date:

2.1 This Limited Warranty takes effect on [01th] [Sep.], 2022(hereinafter referred to as "Effective Date") and applies to Modules first sold after the Effective Date (the date of sale shall be the date indicated in the contracts for the supply of the relevant Modules signed by JA Solar and its affiliates that sold the Modules). Modules sold before the Effective Date is still subject to the Limited Warranty applicable at the time of sale. This version of the Limited Warranty shall remain in effect for the duration of the Limited Product Warranty Period and Limited Peak Power Warranty Period for the applicable Modules covered.

2.2 The sole and exclusive beneficiary of this Limited Warranty is: the purchaser or its permitted successors or assignees under Section 7, whichever is the end user ("Customer") with respect to any Module set forth herein sold by JA Solar under any Module Supply Agreement. For avoidance of doubt, such Customer is limited to a Buyer who acquires the title of Modules and maintains such Modules at the original place of installation without having Modules moved or disassembled after initial installation.. Upon JA Solar's written request, Customer shall confirm ownership of the Modules.

2.3 The term of this Limited Warranty starts from the earlier of: (i) the date of initial delivery to the Customer by JA Solar or its authorized manufacturer, or (ii) six (6) calendar months after Modules dispatch from the JA Solar factory as indicated by the serial numbers for such Modules (hereinafter referred to as "Warranty Start Date").

03. Limited Warranty:

3.1 Limited Product Warranty:

Subject to the terms and conditions of this Limited Warranty, JA Solar warrants to the Customer for a period of one hundred and forty-four (144) calendar months following the Warranty Start Date (hereinafter referred to as "Limited Product Warranty Period") that the Modules (together with the factory-assembled DC connectors and cables), when installed, used, and serviced under normal operating conditions and in accordance with the JA Solar module installation manual, product technical specifications and

maintenance manual (which, if not provided in the supply contract, can be downloaded from JA Solar' official website at www.jasolar.com) will:

1) be free from any defects in design, materials, workmanship or manufacturing which affects module function.

(Hereinafter referred to as "Limited Product Warranty").

The Limited Product Warranty does not cover any changes in appearance (including but not limited to color changes) and normal wear and tear (including but not limited to scratches, contamination, mechanical wear, rust, mildew and other forms of natural wear and tear) that occur after the delivery or installation of the Modules. The Limited Product Warranty does not warrant a specific power output or performance of any Modules, which shall be exclusively covered under Section 3.2 below.

3.2 Limited Peak Power Warranty

Subject to the terms and conditions of this Limited Warranty, JA Solar provides to the Customer a Limited Peak Power Warranty for single glass Modules for a period of 25 years from the Warranty Start Date, or double glass Modules for a period of 25 years from the Warranty Start Date from the Warranty Start Date ("Limited Peak Power Warranty Period"):

1) For mono-crystalline single glass Modules (whose product types are: JAMXXS10-XXX/XX.): the Degradation Rate shall not exceed 2.5% in the first year beginning from the Warranty Start Date, and an additional 0.6% each year thereafter from the beginning of the second year until that date which is twenty-five (25) years following the Warranty Start Date, at which time the Peak Power Output shall be not less than 83.1% of the Nominal Power Output;

For mono-crystalline single glass Modules (whose product types are: JAMXXS20-XXX/XX; JAMXXS21-XXX/XX; JAMXXS30-XXX/XX; JAMXXS31-XXX/XX; JAM72S17-XXX/GR): the Degradation Rate shall not exceed 2% in the first year beginning from the Warranty Start Date, and an additional 0.55% each year thereafter from the beginning of the second year until that date which is twenty-five (25) years following the Warranty Start Date, at which time the Peak Power Output shall be not less than 84.8% of the Nominal Power Output;

2) For mono-crystalline double glass Modules (whose product types are: JAMXXD10-XXX/XX): the Degradation Rate shall not exceed 2.5% in the first year beginning from the Warranty Start Date, and an additional 0.5% each year thereafter from the beginning of the second year until that date which is thirty (30) years following the Warranty Start Date, at which time the Peak Power Output shall be not less than 83% of the Nominal Power Output;

For mono-crystalline double glass Modules (whose product types are: JAMXXD20-XXX/XX; JAMXXD21-XXX/XX; JAMXXD30-XXX/XX; JAMXXD31-XXX/XX;): the Degradation Rate shall not exceed 2% in the first year beginning from the Warranty Start Date, and an additional 0.45% each year thereafter from the beginning of the second year until that date which is thirty (30) years following the Warranty Start Date, at which time the Peak Power Output shall be not less than 84.95% of the Nominal Power Output;

For n-type mono-crystalline double glass Modules (whose product types are:

JAMXXD4X-XXX/XX;): the Degradation Rate shall not exceed 1% in the first year beginning from the Warranty Start Date, and an additional 0.4% each year thereafter from the beginning of the second year until that date which is thirty (30) years following the Warranty Start Date, at which time the Peak Power Output shall be not less than 87.4% of the Nominal Power Output;

(Hereinafter referred to as "Limited Peak Power Warranty")

Note: "X" represents different types of product under different power class.

For the avoidance of doubt, unless otherwise specified in this Limited Warranty, the terms used in the Limited Peak Power Warranty shall have the following meanings:

"Nominal Power Output" means the power output measured for the Modules under the Standard Test Conditions, as indicated on its original nameplate, excluding any positive tolerance that may exist in the Modules.

"Standard Test Conditions" or "STC": (a) light spectrum of AM 1.5; (b) an irradiation of 1000W per square meter; and (c) a cell temperature of 25 degrees centigrade at right angle irradiation. The measurements are carried out in accordance with IEC61215 (equivalent to GB/T 9535) as tested at the junction box terminals per the calibration and testing standards of JA Solar valid at the date of manufacture of the Modules. JA Solar's calibration standards shall comply with the standards applied by international institutions accredited for this purpose.

"Peak Power Output" means the power output at the maximum power point on the output characteristic curve that a Single Module generates in the relevant warranty period after the Warranty Start Date under STC as measured in accordance with IEC61215, considering and corrected for any measurement uncertainty.

"Degradation Rate" means any positive amount calculated in accordance with the following formula, expressed as a percentage:

[Note] For the avoidance of doubt, It is hereby declared that the Degradation Rate of the warranty commitment is the Yearly Degradation Rate from the Warranty Start Date, the Degradation Rate

lower than one year shall be calculated as a whole year.

$$\text{Degradation Rate} = 100\% \times (\text{Nominal Power Output} - \text{Peak Power Output}) / \text{Nominal Power Output}$$

For the avoidance of doubt, notwithstanding anything to the contrary herein, the Limited Peak Power Warranty for bifacial double glass series Modules shall apply only to the front-side power output of such Modules.

3.3 Exclusions:

The Limited Product Warranty provided in Section 3.1 and the Limited Peak Power Warranty provided in Section 3.2 shall not apply to the following events:

- 1) The Modules have been subject to misuse, abuse, neglect, or accident except as may be caused by JA Solar or its affiliates that sold the Modules in the course of storage, transportation or handling;
- 2) The Modules have been installed, used and serviced in a manner that fails to strictly comply with the relevant provisions of the JA Solar module installation manual, product technical specifications and maintenance manual;
- 3) The Modules have been installed or serviced by installation personnel or other personnel who do not have the relevant qualifications in violation of the relevant laws and regulations;
- 4) The Modules have been altered, repaired or modified, or used in processes or in combination with other products not supplied by JA Solar in a manner not consistent with the written instructions of or without the prior written consent of JA Solar or its affiliates;
- 5) The Modules (or the repaired or replaced or supplemented new Modules provided by JA Solar under the Limited Warranty) have been removed and re-installed at any location other than the physical location in which it was originally installed;
- 6) The product type, nameplate or serial number of the Modules have been removed, altered, erased or rendered illegible;
- 7) The design or layout of the photovoltaic power plant system in which the Modules are installed does not conform to the designated module application (certification) or does not meet applicable requirements (e.g. IEC 62548:2016, IEC TS 62738:2018) and generally accepted codes of practice for a safe and harmless operation.;
- 8) The Modules are installed on mobile units (except photovoltaic tracking systems), such as vehicles, ships, etc., or on offshore facilities;
- 9) Exposure of the Modules to an extreme environment or damage caused by drastic changes in such environments, including but not limited to extreme heat, acidic rainfall (including snow), blowing sand, corrosiveness, salty air (e.g. marine environment), contaminated air, soil or groundwater, abnormal levels of oxidation, mold, or any nearby fire, explosion, smoke, or charring.
- 10) Damage caused by force majeure such as natural disasters, including but not limited to lightning, hail, frost, snow, storms, tidal waves, floods, extreme temperatures, earthquakes, typhoons, tornadoes, volcanic eruptions, meteorites, ground motions, earth fissures, landslides, or animal damage;
- 11) Direct or indirect damage caused by third party vandalism or acts beyond the control of JA Solar and its affiliates that sold the Modules, including but not limited to accidents, riots, war, insurrection and communal violence; and
- 12) Damage caused by an accident at the photovoltaic power plant in which the Modules are installed due to any external factor. External factors include but are not limited to voltage fluctuations, power peaks, excess current, power failure, poor electrical or mechanical engineering work, untrained personnel, or other faults occurring in the power supply system (whether or not such failures are caused by any act or omission of the Customer).

In addition, the Limited Product Warranty provided in Section 3.1 and the Limited Peak Power Warranty

provided in Section 3.2 shall not apply to Modules for which JA Solar and its affiliates that sold the Modules have not received all or part of the receivable derived from the sale of the Modules (whether or not the Customer is the debtor for the receivable). Where JA Solar exercises the right to reject a warranty claim under this provision, the Customer may pay the outstanding payment to JA Solar to get the claim accepted. If Customer was not the debtor, then after the Customer pays the outstanding payment, it can assert a claim against the actual debtor. To this end, JA Solar can assist the Customer by issuing a debt transfer certificate.

04. Warranty Claims

4.1 Time Limit for Warranty Claims

All claims under the Limited Product Warranty must be submitted in writing to JA Solar within the Limited Product Warranty Period, while all claims under the Limited Peak Power Warranty must be submitted in writing to JA Solar within the Limited Peak Power Warranty Period. JA Solar shall have the right to reject any and all warranty claims submitted outside of the respective warranty period.

4.2 Burden of Proof for Warranty Claims

In any circumstance, the burden of proof for any warranty claim made by the Customer shall rest upon the Customer. The warranty claim will only be accepted if the Customer provides sufficient documentary evidence to fully demonstrate that the only cause of the fault or non-conformity in the Modules is a breach of the Limited Product Warranty and/or the Limited Peak Power Warranty.

4.3 Warranty Claim Procedures

Customer shall, as soon as it becomes aware of an instance of non-conformity with the Limited Product Warranty and/or the Limited Peak Power Warranty (such Modules involved in the warranty claim are referred to as the "Claim Modules"), immediately (but in any event no later than the earlier of (i) 14 calendar days after it became aware of or should have become aware of such events, and (ii) the respective expiry date of the Limited Product Warranty Period and/or the Limited Peak Power Warranty Period for the Claim Modules) notify JA Solar's Global Customer Service department by giving it written notice sent to: Building No.8, Nuode Center, Automobile Museum East Road, Fengtai District, Beijing, China (100160), Tel: 010-63611888, or via email sent to: **Services@jasolar.com**.

Customer shall provide the following information along with the notice: a) cause of the claim and related supporting documents; b) proof of purchase of the Claim Modules (including but not limited to the supply contract, commercial invoice, delivery and acceptance certificate, payment voucher, etc. If Customer did not purchase the Claim Modules directly from JA Solar or one of its affiliates, it shall provide proof of purchase from the supplier that can be traced back to the supply contract, commercial invoice, etc., signed by JA Solar and its affiliates); c) product type and serial number of the Claim Modules; d) Warranty Start Date of the Claim Modules; e) place of installation of the Claim Modules; f) other additional information requested by JA Solar.

JA Solar will review and evaluate the claim. JA Solar may require the Customer to ship the Claim Modules back to JA Solar's factory for testing if it deems necessary, in which case, JA Solar will issue a return merchandise authorization (hereinafter referred to as "RMA") to Customer. **Customer shall only return the Claim Modules in accordance with the requirements of the RMA after receiving of the same issued by JA Solar. Otherwise, JA Solar shall have the right to reject the warranty claim and refuse to accept the Claim Modules returned by Customer without authorization, and the related risk of loss and expenses shall be borne by Customer.** If the Claim Modules returned are confirmed to be not in conformity with the Limited Product Warranty and/or the Limited Peak Power Warranty, JA Solar will reimburse Customer for the actual shipping and insurance costs associated with the returning of the Claim Modules based on the invoices related to such costs provided by Customer.

JA Solar has the right to decide at its sole discretion whether to conduct an on-site investigation and verification at the installation site of the Claim Modules by a representative. If JA Solar decides to conduct on-site investigation and verification, it shall notify Customer in writing at least 10 working days in advance of its plan for such on-site investigation and verification. Customer shall reply and confirm as soon as possible after receiving written notice from JA Solar. The parties shall communicate timely and cooperative to plan and enable a constructive and efficient on-site investigation and verification. For this purpose, Customer or plant operation staff is requested to fully cooperate (technical and logistical) with JA Solar's

representative during the onsite investigation. If Customer refuses JA Solar's on-site investigation and verification request without any proper reason, JA Solar shall have the right to postpone the claim processing until additional and evaluable data are provided, or if not delivered within a reasonable period of time, to reject the related warranty claim.

4.4 Technical Disputes

Any dispute on technical facts relating to claims brought under this Limited Warranty shall be finally determined by an independent third-party testing organization. JA Solar and Customer shall jointly appoint a reputable international or Chinese testing organization or any other neutral third-party testing organization (hereinafter referred to as "Third-party Testing Organization") to determine the dispute. The Third-party Testing Organization should have the certificate of ISO/IEC17025, and should be mutually recognized and accepted by both parties at the time of the complaint. Neither Customer nor JA Solar shall unreasonably refuse to participate in the evaluation or delay the relevant testing and evaluation procedures, and shall provide convenience for the relevant testing and evaluation (including but not limited to providing convenience at the installation site and/or providing convenience for JA Solar to ship the Claim Modules involved to the Third-party Testing Organization for testing). Before carrying out such testing and evaluation, the Third-party Testing Organization shall inform JA Solar and Customer of the test equipment's power tolerance, which should be reflected in the final conclusions. The Third-party Testing Organization shall act as an expert, adjudicate on the disputed technical facts, allow the parties a reasonable opportunity to make representations and counter-representations and take those representations and counter-representations into account in making final conclusions. The final conclusions arrived at by the Third-party Testing Organization shall be final, conclusive and binding on both parties, and shall be a mandatory prerequisite for the judicial assertion of a warranty claim. Reasonable expenses incurred by the Third-party Testing Organization in carrying out the evaluation shall be paid in advance by Customer, including the cost of shipping the Claim Modules to the designated testing location of the Third-party Testing Organization, insurance costs, storage costs, etc., as well as the service charges for testing and evaluation. If the Third-party Testing Organization concludes that the Claim Modules do not conform to the Limited Product Warranty and/or the Limited Peak Power Warranty, JA Solar shall reimburse for actual testing and transportation expenses prepaid by Customer upon receipt of the relevant written notice and copies of the relevant invoices. The risk of damage to and loss of the Claim Modules in the process of testing and evaluation by the Third-party Testing Organization shall be transferred at the same time as their ownership.

4.5 Ownership of the Claim Modules

The ownership of the Claim Modules is transferred to JA Solar only after JA Solar confirms Customer's warranty claim and provides replacements or refunds in accordance with the remedies provided under this Limited Warranty. Until such time, ownership of the Claim Modules shall remain with Customer.

05. Remedy for Warranty Claims:

5.1 Remedy under the Limited Product Warranty:

Should JA Solar confirm that the Claim Modules are indeed not in conformity with the Limited Product Warranty, it shall, at its sole discretion, within a reasonable time period, either: a) repair the Claim Modules at no charge to Customer; b) provide Customer with replacement Modules in place of the Claim Modules; or c) provide Customer a refund of the purchase price as evidenced by the original supply invoice provided by Customer, subject to an annual 4% for single glass module or 3.33% for double glass module depreciation rate on the purchase price (if Customer is unable to provide the original supply invoice, monetary compensation will be made based on the then market price of an identical or similar module type). Unless the parties agree otherwise, JA Solar shall ship the repaired Modules or replacement Modules in the same manner and to the same destination as specified in the original supply contract signed by JA Solar or one of its affiliates. The cost of shipping shall be paid in the same manner as specified in the original supply contract.

5.2 Remedy under the Limited Peak Power Warranty:

Should JA Solar confirm that the Claim Modules are indeed not in conformity with the Limited Peak Power Warranty, it shall, at its sole discretion, within a reasonable time period, either: a) repair the Claim Modules at no charge to Customer; b) provide Customer with replacement Modules in place of the Claim Modules; c) make up the difference to the guaranteed power output by providing additional Modules at no cost to

Customer such that the total power output of additional Modules equals the amount of degradation in the Claim Modules, calculated as follows:

(Nominal Power Output–Peak Power Output of the Claim Modules)* number of Claim Modules;

or d) provide Customer a refund of the purchase price as evidenced by the original supply invoice provided by Customer subject to an annual 4% for single glass module or 3.33% for double glass module depreciation rate on the purchase price (if the Customer is unable to provide the original supply invoice, monetary compensation will be made based on the then market price of an identical or similar module type).

5.3 Exclusive Remedy:

The Remedy under the Limited Product Warranty and the Remedy under the Limited Peak Power Warranty as set forth above are the sole and exclusive responsibility and obligation of JA Solar to Customer under this Limited Warranty, and are also the sole and exclusive remedy of Customer for the Claim Modules under this Limited Warranty. JA Solar will only reimburse for expenses expressly stipulated in this Limited Warranty. Costs and expenses associated with removal of the Claim Modules and the reinstallation of the repaired or replacement Modules as well as customs clearance costs incurred by the return of the Claim Modules (if any) shall be borne by Customer. JA Solar's performance of its warranty obligation under this Limited Warranty shall not extend the Limited Product Warranty Period or the Limited Peak Power Output Warranty Period. The original warranty periods shall still apply to the repaired or replacement Modules. If the production of the same type of the Claim Modules has been discontinued, withdrawn from the market, or is otherwise unavailable, JA Solar shall have the right to replace the Claim Modules with a similar type, the performance of which should not be lower than the original type.

06. Limitation of Liability:

1) Notwithstanding anything to the contrary herein, the warranties set forth in this Limited Warranty are in lieu of all other warranties, whether express, implied, or statutory, including but not limited to any implied warranties of merchantability, fitness for a particular purpose or non-infringement. However, if Customer is identified as a “consumer” and the Modules as a “consumer product” in accordance with the laws governing the protection of consumer rights in the country where the Modules were first installed, to the extent required by applicable law, any implied warranties of merchantability, fitness for a particular purpose or non-infringement are limited to the Limited Product Warranty Period or the Limited Peak Power Output Warranty Period set forth above, or such shorter period as required by applicable law. This Limited Warranty gives Customer specific legal rights, and Customer may also have other rights that vary by state, province or jurisdiction, and such other rights shall remain unaffected.

2) Unless otherwise provided by applicable mandatory law in the country where the Modules were first installed, JA Solar shall not be liable for any of the following losses: a) personal injury or property damage; b) any other loss or injury whatsoever arising out of or in connection with the Modules (including but not limited to any defects in the Modules or arising from the use or installation thereof); c) any incidental, consequential or special damages resulting from any cause; and d) lost power, lost profits, lost production, lost revenue or lost interest caused by the non-usability of the Modules, even if JA Solar was aware of the possibility of such damages. JA Solar's liability for fraudulent or willful intent, gross negligence or personal injury, in each case, under applicable mandatory liability law shall remain unaffected. Notwithstanding any other provision of this Limited Warranty, and including if JA Solar is liable to compensate Customer here under, the total compensation paid or payable by JA Solar, and the total liability of JA Solar hereunder, shall not exceed the amount actually received by JA Solar as indicated in the original invoice for the Claim Modules. The limitations of liability under this Limited Warranty will not apply to the extent restricted or prohibited by applicable mandatory law.

3) Customer acknowledges that the foregoing limitations on liability are an essential element of the relevant supply contract between the parties and that in the absence of such limitations the purchase price of the relevant Modules would be substantially higher.

4)JA Solar has adopted reasonable methods such as bolding, blackening and highlighting to draw the Customer's attention to clauses which exclude or limit its liability under this Limited Warranty, and have fully explained the relevant clauses as required by Customer. There is no disagreement between the parties over the understanding of any clause of this Limited Warranty.

07. Assignment

Upon written notice to JA Solar, Customer may assign this Limited Warranty to a new owner of the entire power plant project or an individual consumer who is passed title of Module product after its initial installation, provided that: (i) the Modules remain in their original place of installation, (ii) there is no outstanding payment due under the supply contract; and (iii) the assignee agrees to be bound by these Limited Warranty terms. If requested by JA Solar, Customer shall provide reasonable evidence of such succession or transfer of ownership. This Limited Warranty may not otherwise be assigned or transferred, and any attempt to assign or transfer in violation of this Section 7 shall be null and void.

08. Miscellaneous

8.1 Severability

If any portion or provision of this Limited Warranty is held to be invalid, illegal or unenforceable under applicable law, or the application of such portion or provision to certain persons or in certain circumstances is held to be invalid, illegal or unenforceable, then the portion or provision shall be deemed to be changed and interpreted to accomplish the objectives of such portion or provision to the greatest extent possible under applicable law and the remaining portions or provisions of this Limited Warranty or the applicability of this Limited Warranty will remain unaffected, independent and valid.

8.2 Force Majeure:

JA Solar shall not be responsible or liable in any way to Customer for any non-performance or delay in JA Solar's performance of its obligations under this Limited Warranty due to occurrences of force majeure events such as natural disasters, war, riots, strikes, unavailability of suitable or sufficient labor, material, or capacity or technical or yield failures and any unforeseen event beyond its control, including, without limitation, any technological or physical event or condition which is not reasonably known or understood by JA Solar at the time of the sale of the Claim Modules or the notification by Customer of the relevant warranty claim.

8.3 Governing Law and Dispute Resolution

Any dispute related to or arising out of this Limited Warranty, including without limitation any question regarding its existence, validity, breach, or termination, shall be referred to and finally resolved pursuant to the governing law clauses and dispute resolution procedures under the supply contract between the original purchaser and JA Solar. As a condition to any obligation of JA Solar hereunder, JA Solar may require any Customer seeking to enforce this Limited Warranty to execute such additional agreements as may reasonably be required to enforce the terms of this Section. The laws governing this Limited Warranty shall exclude any conflicts-of-law rule as well as the United Nations Convention on Contracts for the International Sale of Goods (CISG) concluded on April 11, 1980 and any other uniform code.

Harvest the Sunshine

Premium Cells, Premium Modules

DEEP BLUE 3.0

Mono

555W MBB Half-cell Module
JAM72S30 530-555/MR Series

Introduction

Assembled with 11BB PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower LCOE



Less shading and lower resistive loss




Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

0.55% Annual Degradation
Over 25 years

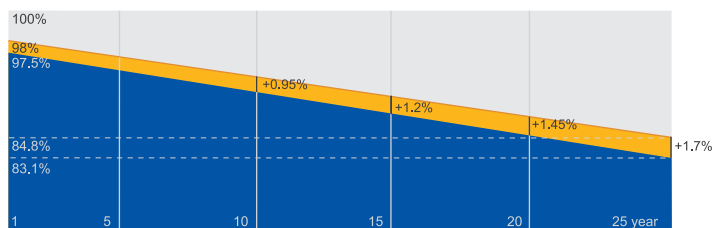


■ New linear power warranty ■ Standard module linear power warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



MECHANICAL DIAGRAMS

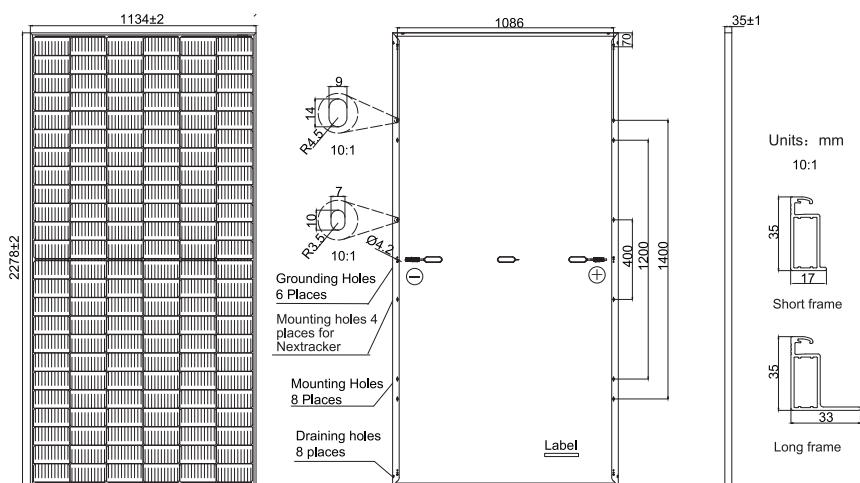

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	28.1kg
Dimensions	2278±2mm×1134±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC) , 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	MC4-EVO2/ QC 4.10-35
Cable Length (Including Connector)	Portrait: 200mm(+)/300mm(-); 800mm(+)/800mm(-)(Leapfrog) Landscape: 1300mm(+)/1300mm(-)
Packaging Configuration	31pcs/Pallet 620pcs/40HQ Container

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S30 -530/MR	JAM72S30 -535/MR	JAM72S30 -540/MR	JAM72S30 -545/MR	JAM72S30 -550/MR	JAM72S30 -555/MR
Rated Maximum Power(P _{max}) [W]	530	535	540	545	550	555
Open Circuit Voltage(V _{oc}) [V]	49.30	49.45	49.60	49.75	49.90	50.02
Maximum Power Voltage(V _{mp}) [V]	41.31	41.47	41.64	41.80	41.96	42.11
Short Circuit Current(I _{sc}) [A]	13.72	13.79	13.86	13.93	14.00	14.07
Maximum Power Current(I _{mp}) [A]	12.83	12.90	12.97	13.04	13.11	13.18
Module Efficiency [%]	20.5	20.7	20.9	21.1	21.3	21.5
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM72S30 -530/MR	JAM72S30 -535/MR	JAM72S30 -540/MR	JAM72S30 -545/MR	JAM72S30 -550/MR	JAM72S30 -555/MR	OPERATING CONDITIONS
Rated Max Power(P _{max}) [W]	401	405	408	412	416	420	Maximum System Voltage 1000V/1500V DC
Open Circuit Voltage(V _{oc}) [V]	46.18	46.31	46.43	46.55	46.68	46.85	Operating Temperature -40°C~+85°C
Max Power Voltage(V _{mp}) [V]	38.57	38.78	38.99	39.20	39.43	39.66	Maximum Series Fuse Rating 25A
Short Circuit Current(I _{sc}) [A]	11.01	11.05	11.09	11.13	11.17	11.21	Maximum Static Load,Front* 5400Pa(112lb/ft ²) Maximum Static Load,Back* 2400Pa(50lb/ft ²)
Max Power Current(I _{mp}) [A]	10.39	10.43	10.47	10.51	10.55	10.59	NOCT 45±2°C
NOCT	Irradiance 800W/m ² , ambient temperature 20°C,wind speed 1m/s, AM1.5G						Safety Class Class II
	*For NexTracker installations, Maximum Static Load, Front is 1800Pa while Maximum Static Load, Back is 1800Pa.						Fire Performance UL Type 1

CHARACTERISTICS


Current-Voltage Curve JAM72S30-540/MR



Power-Voltage Curve JAM72S30-540/MR



Current-Voltage Curve JAM72S30-540/MR



585W MBB

LR
Series

Higher output power



Lower LCOE



Less shading and lower resistive loss



Better mechanical loading tolerance



12-year product warranty



25-year linear power output warranty

Half-cell Module JAM72S30 LR 560-585

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing






585W MBB

560-585
JAM72S30

LR
Series

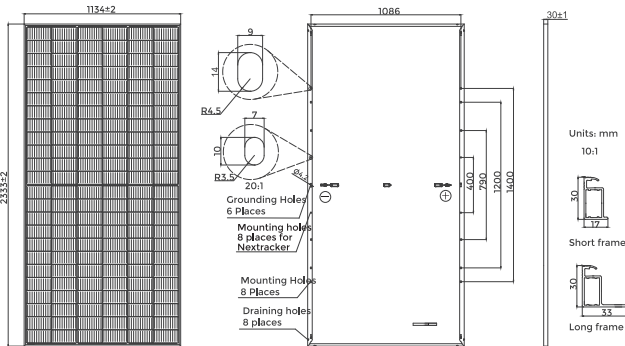

Remark: customized frame color and cable length available upon request

Cell	Mono
Weight	28kg
Dimensions	2333±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm ² (IEC) , 12 AWG(UL)
No. of cells	144(6x24)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-); 800mm(+)/800mm(-)(Leapfrog) Landscape: 1400mm(+)/1400mm(-)
Front Glass	3.2mm
Packaging Configuration	36pcs/Pallet, 720pcs/40ft Container

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S30 -560/LR	JAM72S30 -565/LR	JAM72S30 -570/LR	JAM72S30 -575/LR	JAM72S30 -580/LR	JAM72S30 -585/LR
Rated Maximum Power(P _{max}) [W]	560	565	570	575	580	585
Open Circuit Voltage(V _{oc}) [V]	49.59	49.77	49.95	50.13	50.31	50.49
Maximum Power Voltage(V _{mp}) [V]	41.49	41.68	41.87	42.05	42.24	42.42
Short Circuit Current(I _{sc}) [A]	14.25	14.31	14.37	14.44	14.50	14.56
Maximum Power Current(I _{mp}) [A]	13.50	13.56	13.62	13.67	13.73	13.79
Module Efficiency [%]	21.2	21.4	21.5	21.7	21.9	22.1
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/ °C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/ °C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/ °C					
STC	Irradiance 1000W/m ² , cell temperature 25 °C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.


ELECTRICAL PARAMETERS AT NOCT

TYPE	JAM72S30 -560/LR	JAM72S30 -565/LR	JAM72S30 -570/LR	JAM72S30 -575/LR	JAM72S30 -580/LR	JAM72S30 -585/LR
Rated Max Power(P _{max}) [W]	424	428	431	435	439	443
Open Circuit Voltage(V _{oc}) [V]	46.92	47.09	47.27	47.44	47.61	47.78
Max Power Voltage(V _{mp}) [V]	39.26	39.44	39.62	39.79	39.97	40.14
Short Circuit Current(I _{sc}) [A]	11.40	11.45	11.50	11.55	11.60	11.65
Max Power Current(I _{mp}) [A]	10.80	10.85	10.89	10.94	10.99	11.03
NOCT	Irradiance 800W/m ² , ambient temperature 20 °C, wind speed 1m/s, AM1.5G					


*For NexTracker installations, maximum static load please take compatibility approve letter between JA Solar and NexTracker for reference.

CHARACTERISTICS


Current-Voltage Curve JAM72S30-575/LR

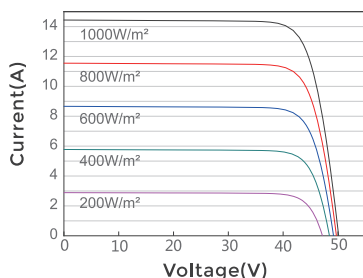

Power-Voltage Curve JAM72S30-575/LR

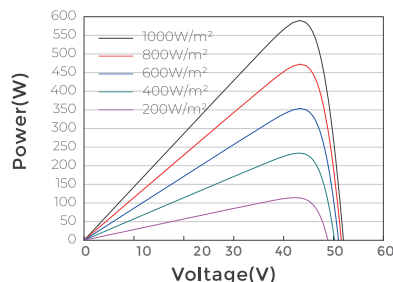


Current-Voltage Curve JAM72S30-575/LR

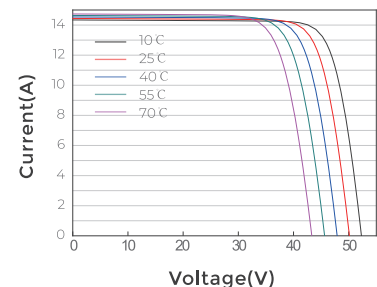

SUPERIOR WARRANTY

0.55% Annual Degradation Over 25 years

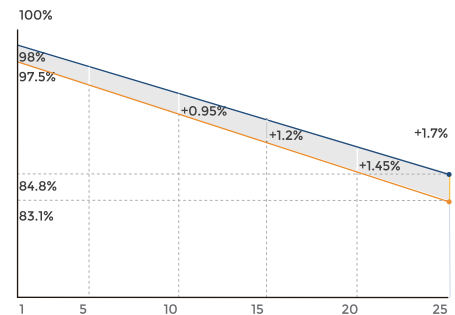

- New linear power warranty
- Standard module linear power warranty

OPERATING CONDITIONS

Maximum System Voltage	1000V/1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Maximum Static Load, Front*	5400Pa(112lb/ft ²)
Maximum Static Load, Back*	2400Pa(50lb/ft ²)
NOCT	45±2°C
Safety Class	Class II
Fire Performance	UL Type 1



Product Service

CERTIFICATE

No. Z2 072092 0295 Rev. 64

Holder of Certificate: **Shanghai JA Solar Technology Co., Ltd.**
No. 118, Lane 3111
West Huancheng Road
Fengxian District
201401 Shanghai
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:



Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061604115-79

Valid until: 2028-08-31

Date, 2023-09-01

(Zhulin Zhang)

CERTIFICATE

No. Z2 072092 0295 Rev. 64

Model(s):

1500 V DC Maximum System Voltage, Double Glass Modules:

JAM72D00-xxx/BP/1500V, JAM72D00-xxx/BP, xxx= 330 to 385 in steps of 5;
 JAM60D00-xxx/BP/1500V, JAM60D00-xxx/BP, xxx= 275 to 320 in steps of 5;
 JAM60D00-xxx/PR/1500V, JAM60D00-xxx/PR, xxx= 285 to 320 in steps of 5;
 JAM72D00-xxx/PR/1500V, JAM72D00-xxx/PR, xxx= 340 to 385 in steps of 5;
 JAM60D00-xxx/MB/1500V, JAM60D00-xxx/MB, xxx= 310 to 315 in steps of 5;
 JAM72D00-xxx/MB/1500V, JAM72D00-xxx/MB, xxx= 370 to 380 in steps of 5;
 JAM72D09-xxx/BP/1500V, JAM72D09-xxx/BP, xxx= 360 to 400 in steps of 5;
 JAM60D09-xxx/BP/1500V, JAM60D09-xxx/BP, xxx= 300 to 340 in steps of 5;
 JAM72D10-xxx/MB/1500V, JAM72D10-xxx/MB, xxx= 385 to 430 in steps of 5;
 JAM60D10-xxx/MB/1500V, JAM60D10-xxx/MB, xxx= 320 to 355 in steps of 5;
 JAM72D10-xxx/BP/1500V, JAM72D10-xxx/BP, xxx= 385 to 415 in steps of 5;
 JAM60D10-xxx/BP/1500V, JAM60D10-xxx/BP, xxx= 300 to 340 in steps of 5;
 JAM66D10-xxx/MB/1500V, JAM66D10-xxx/MB, xxx= 360 to 380 in steps of 5;
 JAM78D10-xxx/MB/1500V, JAM78D10-xxx/MB, xxx= 435 to 455 in steps of 5;
 JAM72D20-xxx/MB/1500V, JAM72D20-xxx/MB, xxx= 430 to 465 in steps of 5;
 JAM60D20-xxx/MB/1500V, JAM60D20-xxx/MB, xxx= 355 to 385 in steps of 5;
 JAM72D10-xxx/TB/1500V, JAM72D10-xxx/TB, xxx= 400 to 420 in steps of 5;
 JAM60D10-xxx/TB/1500V, JAM60D10-xxx/TB, xxx= 335 to 350 in steps of 5;
 JAM78D30-xxx/MB/1500V, JAM78D30-xxx/MB, xxx= 580 to 605 in steps of 5;
 JAM72D30-xxx/MB/1500V, JAM72D30-xxx/MB, xxx= 505 to 555 in steps of 5;
 JAM72D30-xxx/MB/F/1500V, JAM72D30-xxx/MB/F,
 xxx= 505 to 555 in steps of 5;
 JAM66D30-xxx/MB/1500V, JAM66D30-xxx/MB, xxx= 465 to 505 in steps of 5;
 JAM66D30-xxx/MB/F/1500V, JAM66D30-xxx/MB/F,
 xxx= 465 to 505 in steps of 5;
 JAM60D30-xxx/MB/1500V, JAM60D30-xxx/MB, xxx= 435 to 460 in steps of 5;
 JAM54D30-xxx/MB/1500V, JAM54D30-xxx/MB, xxx= 390 to 415 in steps of 5;
 JAM54D31-xxx/MB/1500V, JAM54D31-xxx/MB, xxx= 395 to 400 in steps of 5;
 JAM50D40-xxx/MB/1500V, JAM50D40-xxx/MB, xxx= 485 to 500 in steps of 5;
 JAM78D30-xxx/GB/1500V, JAM78D30-xxx/GB, xxx= 585 to 610 in steps of 5;
 JAM72D30-xxx/GB/1500V, JAM72D30-xxx/GB, xxx= 540 to 560 in steps of 5;
 JAM66D30-xxx/GB/1500V, JAM66D30-xxx/GB, xxx= 495 to 510 in steps of 5;
 JAM60D30-xxx/GB/1500V, JAM60D30-xxx/GB, xxx= 450 to 470 in steps of 5;
 JAM54D30-xxx/GB/1500V, JAM54D30-xxx/GB, xxx= 405 to 420 in steps of 5;
 JAM54D31-xxx/GB/1500V, JAM54D31-xxx/GB, xxx= 410 to 420 in steps of 5;
 JAM72D30-xxx/HB/1500V, JAM72D30-xxx/HB, xxx= 530 to 560 in steps of 5;
 JAM78D40-xxx/MB/1500V, JAM78D40-xxx/MB, xxx= 580 to 630 in steps of 5;
 JAM72D40-xxx/MB/1500V, JAM72D40-xxx/MB, xxx= 540 to 585 in steps of 5;
 JAM66D40-xxx/MB/1500V, JAM66D40-xxx/MB, xxx= 500 to 535 in steps of 5;
 JAM60D40-xxx/MB/1500V, JAM60D40-xxx/MB, xxx= 455 to 485 in steps of 5;
 JAM54D40-xxx/MB/1500V, JAM54D40-xxx/MB, xxx= 405 to 440 in steps of 5;
 JAM78D40-xxx/GB/1500V, JAM78D40-xxx/GB, xxx= 580 to 635 in steps of 5;
 JAM72D40-xxx/GB/1500V, JAM72D40-xxx/GB, xxx= 540 to 585 in steps of 5;
 JAM66D40-xxx/GB/1500V, JAM66D40-xxx/GB, xxx= 500 to 535 in steps of 5;
 JAM60D40-xxx/GB/1500V, JAM60D40-xxx/GB, xxx= 455 to 485 in steps of 5;
 JAM54D40-xxx/GB/1500V, JAM54D40-xxx/GB, xxx= 405 to 440 in steps of 5;
 JAM54D41-xxx/GB/1500V, JAM54D41-xxx/GB, xxx= 415 to 435 in steps of 5;
 JAM66D35-xxx/MB/1500V, JAM66D35-xxx/MB, xxx= 650 to 665 in steps of 5;
 JAM60D35-xxx/MB/1500V, JAM60D35-xxx/MB, xxx= 590 to 605 in steps of 5;
 JAM72D30-xxx /TB/1500V, JAM72D30-xxx /TB, xxx= 540 to 580 in steps of 5;
 JAM72D40-xxx/LB/1500V, JAM72D40-xxx/LB, xxx= 575 to 600 in steps of 5;
 JAM54D40-xxx/LB/1500V, JAM54D40-xxx/LB, xxx= 420 to 450 in steps of 5;
 JAM54D41-xxx/LB/1500V, JAM54D41-xxx/LB, xxx= 420 to 440 in steps of 5;
 JAM72D42-xxx/LB/1500V, JAM72D42-xxx/LB, xxx= 605 to 630 in steps of 5;
 JAM54D42-xxx/LB/1500V, JAM54D42-xxx/LB, xxx= 455 to 470 in steps of 5;
 JAM66D42-xxx/MB/1500V, JAM66D42-xxx/MB, xxx= 555 to 575 in steps of 5;
 JAM72D30-xxx/LB/1500V, JAM72D30-xxx/LB, xxx= 555 to 575 in steps of 5;
 JAM54D30-xxx/LB/1500V, JAM54D30-xxx/LB, xxx= 420 to 430 in steps of 5;
 JAM66D45-xxx/LB/1500V, JAM66D45-xxx/LB, xxx= 585 to 605 in steps of 5;

1000 V DC Maximum System Voltage, Single Glass Modules:

JAM6(K)-72-xxx/PR, xxx= 345 to 370 in steps of 5;
 JAM6(K)-60-xxx/PR, xxx= 285 to 310 in steps of 5;
 JAM6(K)-72-xxx/4BB, xxx= 320 to 345 in steps of 5;
 JAM6(K)-60-xxx/4BB, xxx= 265 to 285 in steps of 5;
 JAM72S01-xxx/SC/1000V, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC/1000V, xxx= 265 to 305 in steps of 5;
 JAM72S01-xxx/PR/1000V, xxx= 345 to 390 in steps of 5;
 JAM60S01-xxx/PR/1000V, xxx= 285 to 325 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 64

JAM72S01-xxx/MR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR/1000V, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR/1000V, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR/1000V, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR/1000V, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR/1000V, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR/1000V, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR/1000V, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR/1000V, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR/1000V, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L/1000V, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR/1000V, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR/1000V, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP/1000V, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP/1000V, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP/1000V, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP/1000V, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR/1000V, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR/1000V, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC/1000V, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC/1000V, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR/1000V, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR/1000V, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR/1000V, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR/1000V, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR/1000V, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR/1000V, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR/1000V, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR/1000V, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB/1000V, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB/1000V, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR/1000V, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR/1000V, xxx= 355 to 390 in steps of 5;
 JAM78S30-xxx/MR/1000V, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR/1000V, xxx= 510 to 555 in steps of 5;
 JAM66S30-xxx/MR/1000V, xxx= 470 to 505 in steps of 5;
 JAM60S30-xxx/MR/1000V, xxx= 435 to 460 in steps of 5;
 JAM54S30-xxx/MR/1000V, xxx= 390 to 425 in steps of 5;
 JAM54S30-xxx/MB/1000V, xxx= 385 to 410 in steps of 5;
 JAM54S31-xxx/MB/1000V, xxx= 385 to 405 in steps of 5;
 JAM60S21-xxx/MR/1000V, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR/1000V, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB/1000V, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB/1000V, xxx= 375 to 390 in steps of 5;
 JAM72S31-xxx/MR/1000V, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR/1000V, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR/1000V, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR/1000V, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B)/1000V, xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR/1000V, xxx= 575 to 610 in steps of 5;
 JAM72S30-xxx/GR/1000V, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR/1000V, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR/1000V, xxx= 445 to 470 in steps of 5;
 JAM54S30-xxx/GR/1000V, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR/1000V, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR/1000V, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR/1000V, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR/1000V, xxx= 430 to 450 in steps of 5;
 JAM54S31-xxx/GR/1000V, xxx= 395 to 415 in steps of 5;
 JAM72S17-xxx/GR/1000V, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR/1000V, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR/1000V, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR/1000V, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR/1000V, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR/1000V, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR/1000V, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR/1000V, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR/1000V, xxx= 405 to 430 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 64

JAM66S35-xxx/MR/1000V, xxx= 650 to 670 in steps of 5;
JAM60S35-xxx/MR/1000V, xxx= 590 to 610 in steps of 5;
JAM72S30-xxx/LR/1000V, xxx= 555 to 580 in steps of 5;
JAM54S30-xxx/LR/1000V, xxx= 415 to 435 in steps of 5;
JAM54S31-xxx/LR/1000V, xxx= 415 to 420 in steps of 5;
JAM54S30-xxx/LB/1000V, xxx= 410 to 425 in steps of 5;
JAM54S31-xxx/LB/1000V, xxx= 410 to 415 in steps of 5;

1000 V DC or 1500 V DC Maximum System Voltage,
Single Glass Modules:

JAM72S01-xxx/SC, xxx= 320 to 365 in steps of 5;
JAM60S01-xxx/SC, xxx= 265 to 305 in steps of 5;
JAM60S01-xxx/PR, xxx= 285 to 325 in steps of 5;
JAM72S01-xxx/MR, xxx= 365 to 385 in steps of 5;
JAM60S01-xxx/MR, xxx= 305 to 320 in steps of 5;
JAM72S03-xxx/PR, xxx= 360 to 395 in steps of 5;
JAM60S03-xxx/PR, xxx= 300 to 330 in steps of 5;
JAM72S09-xxx/PR, xxx= 370 to 405 in steps of 5;
JAM60S09-xxx/PR, xxx= 310 to 335 in steps of 5;
JAM72S10-xxx/PR, xxx= 380 to 410 in steps of 5;
JAM60S10-xxx/PR, xxx= 315 to 345 in steps of 5;
JAM72S10-xxx/MR, xxx= 390 to 430 in steps of 5;
JAM60S10-xxx/MR, xxx= 325 to 355 in steps of 5;
JAM60S10-xxx/MR-L, xxx= 325 to 355 in steps of 5;
JAM78S10-xxx/MR, xxx= 435 to 465 in steps of 5;
JAM66S10-xxx/MR, xxx= 345 to 390 in steps of 5;
JAM72S09-xxx/BP, xxx= 375 to 385 in steps of 5;
JAM60S09-xxx/BP, xxx= 315 to 320 in steps of 5;
JAM72S10-xxx/BP, xxx= 385 to 400 in steps of 5;
JAM60S10-xxx/BP, xxx= 320 to 330 in steps of 5;
JAM72S02-xxx/PR, xxx= 345 to 390 in steps of 5;
JAM60S02-xxx/PR, xxx= 285 to 325 in steps of 5;
JAM72S02-xxx/SC, xxx= 320 to 365 in steps of 5;
JAM60S02-xxx/SC, xxx= 265 to 305 in steps of 5;
JAM72S02-xxx/MR, xxx= 365 to 385 in steps of 5;
JAM60S02-xxx/MR, xxx= 305 to 320 in steps of 5;
JAM72S08-xxx/PR, xxx= 360 to 395 in steps of 5;
JAM60S08-xxx/PR, xxx= 300 to 330 in steps of 5;
JAM72S12-xxx/PR, xxx= 365 to 385 in steps of 5;
JAM60S12-xxx/PR, xxx= 305 to 330 in steps of 5;
JAM72S17-xxx/PR, xxx= 380 to 390 in steps of 5;
JAM60S17-xxx/PR, xxx= 315 to 325 in steps of 5;
JAM72S17-xxx/MR, xxx= 390 to 430 in steps of 5;
JAM60S17-xxx/MR, xxx= 315 to 355 in steps of 5;
JAM72S10-xxx/MB, xxx= 395 to 415 in steps of 5;
JAM60S10-xxx/MB, xxx= 330 to 345 in steps of 5;
JAM72S20-xxx/MR, xxx= 430 to 470 in steps of 5;
JAM60S20-xxx/MR, xxx= 355 to 390 in steps of 5;
JAM78S10-xxx/MR-J, xxx= 435 to 465 in steps of 5;
JAM78S30-xxx/MR, xxx= 580 to 605 in steps of 5;
JAM72S30-xxx/MR, xxx= 510 to 555 in steps of 5;
JAM66S30-xxx/MR, xxx= 470 to 505 in steps of 5;
JAM60S30-xxx/MR, xxx= 435 to 460 in steps of 5;
JAM54S30-xxx/MR, xxx= 390 to 425 in steps of 5;
JAM54S30-xxx/MB, xxx= 385 to 410 in steps of 5;
JAM54S31-xxx/MB, xxx= 385 to 405 in steps of 5;
JAM60S21-xxx/MR, xxx= 355 to 390 in steps of 5;
JAM50S40-xxx/MR, xxx= 490 to 500 in steps of 5;
JAM72S20-xxx/MB, xxx= 450 to 465 in steps of 5;
JAM60S20-xxx/MB, xxx= 375 to 390 in steps of 5;
JAM68S11-xxx/PR, xxx= 355 to 365 in steps of 5;
JAM68S11-xxx/PR(B), xxx= 345 to 365 in steps of 5;
JAM72S31-xxx/MR, xxx= 510 to 545 in steps of 5;
JAM66S31-xxx/MR, xxx= 470 to 500 in steps of 5;
JAM60S31-xxx/MR, xxx= 425 to 450 in steps of 5;
JAM54S31-xxx/MR, xxx= 385 to 405 in steps of 5;
JAM76S11-xxx/PR(B), xxx= 395 to 415 in steps of 5;
JAM78S30-xxx/GR, xxx= 575 to 610 in steps of 5;
JAM72S30-xxx/GR, xxx= 535 to 560 in steps of 5;
JAM66S30-xxx/GR, xxx= 500 to 510 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 64

JAM60S30-xxx/GR, xxx= 445 to 470 in steps of 5;
 JAM54S30-xxx/GR, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR, xxx= 435 to 450 in steps of 5;
 JAM54S31-xxx/GR, xxx= 395 to 415 in steps of 5;
 JAM72S17-xxx/GR, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR, xxx= 405 to 430 in steps of 5;
 JAM66S35-xxx/MR, xxx= 650 to 670 in steps of 5;
 JAM60S35-xxx/MR, xxx= 590 to 610 in steps of 5;
 JAM72S30-xxx/LR, xxx= 555 to 580 in steps of 5;
 JAM54S30-xxx/LR, xxx= 415 to 435 in steps of 5;
 JAM54S31-xxx/LR, xxx= 415 to 420 in steps of 5;
 JAM54S30-xxx/LB, xxx= 410 to 425 in steps of 5;
 JAM54S31-xxx/LB, xxx= 410 to 415 in steps of 5;

1500 V DC Maximum System Voltage, Single Glass Modules:

JAM6(K)-72-xxx/PR/1500V, xxx= 345 to 370 in steps of 5;
 JAM6(K)-60-xxx/PR/1500V, xxx= 285 to 310 in steps of 5;
 JAM6(K)-72-xxx/4BB/1500V, xxx= 320 to 345 in steps of 5;
 JAM6(K)-60-xxx/4BB/1500V, xxx= 265 to 285 in steps of 5;
 JAM72S01-xxx/SC/1500V, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC/1500V, xxx= 265 to 305 in steps of 5;
 JAM72S01-xxx/PR, xxx= 345 to 390 in steps of 5;
 JAM60S01-xxx/PR/1500V, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR/1500V, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR/1500V, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR/1500V, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR/1500V, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR/1500V, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR/1500V, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR/1500V, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR/1500V, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR/1500V, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L/1500V, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR/1500V, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR/1500V, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP/1500V, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP/1500V, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP/1500V, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP/1500V, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR/1500V, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR/1500V, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC/1500V, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC/1500V, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR/1500V, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR/1500V, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR/1500V, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR/1500V, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR/1500V, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR/1500V, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR/1500V, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR/1500V, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB/1500V, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB/1500V, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR/1500V, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR/1500V, xxx= 355 to 390 in steps of 5;
 JAM78S30-xxx/MR/1500V, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR/1500V, xxx= 510 to 555 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 64

JAM66S30-xxx/MR/1500V, xxx=470 to 505 in steps of 5;
 JAM60S30-xxx/MR/1500V, xxx=435 to 460 in steps of 5;
 JAM54S30-xxx/MR/1500V, xxx= 390 to 425 in steps of 5;
 JAM54S30-xxx/MB/1500V, xxx= 385 to 410 in steps of 5;
 JAM54S31-xxx/MB/1500V, xxx= 385 to 405 in steps of 5;
 JAM60S21-xxx/MR/1500V, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR/1500V, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB/1500V, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB/1500V, xxx= 375 to 390 in steps of 5;
 JAM72S31-xxx/MR/1500V, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR/1500V, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR/1500V, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR/1500V, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B)/1500V, xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR/1500V, xxx= 575 to 610 in steps of 5;
 JAM72S30-xxx/GR/1500V, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR/1500V, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR/1500V, xxx= 445 to 470 in steps of 5;
 JAM54S30-xxx/GR/1500V, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR/1500V, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR/1500V, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR/1500V, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR/1500V, xxx= 435 to 450 in steps of 5;
 JAM54S31-xxx/GR/1500V, xxx= 395 to 415 in steps of 5;
 JAM72S17-xxx/GR/1500V, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR/1500V, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR/1500V, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR/1500V, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR/1500V, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR/1500V, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR/1500V, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR/1500V, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR/1500V, xxx= 405 to 430 in steps of 5;
 JAM66S35-xxx/MR/1500V, xxx= 650 to 670 in steps of 5;
 JAM60S35-xxx/MR/1500V, xxx= 590 to 610 in steps of 5;
 JAM72S30-xxx/LR/1500V, xxx= 555 to 580 in steps of 5;
 JAM54S30-xxx/LR/1500V, xxx= 415 to 435 in steps of 5;
 JAM54S31-xxx/LR/1500V, xxx= 415 to 420 in steps of 5;
 JAM54S30-xxx/LB/1500V, xxx= 410 to 425 in steps of 5;
 JAM54S31-xxx/LB/1500V, xxx= 410 to 415 in steps of 5;
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed or Frameless, with Junction box, Cable and Connectors.
Test Laboratory:	Yangzhou Opto-Electrical Products Testing Institute No. 10 West Kaifa Road, Yangzhou 225009 Jiangsu, P. R. China
Safety Class:	Class II
Maximum System Voltage:	1500 V DC or 1000 V DC
Fire Safety Class:	Class C according to UL790.
Production Facility(ies):	079395, 095903, 090968, 108746, 072092, 109998, 112017, 113943, 114922, 001783, 004170, 113691, 117043, 119123, 120210, 117684, 114994, 120736, 115500, 120016, 108093, 121678.

Tested according to:

IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016
 EN IEC 61730-1:2018
 EN IEC 61730-1:2018/AC:2018-06
 EN IEC 61730-2:2018
 EN IEC 61730-2:2018/AC:2018-06