


## TECHNICAL FEATURES

|                    |                                                                         |
|--------------------|-------------------------------------------------------------------------|
| MODEL:             | <b>GREPIETRADI CREMA</b>                                                |
| FORMAT:            | <b>120x120</b>                                                          |
| THICKNESS(mm):     |                                                                         |
| DATE:              | <b>23/06/2025</b>                                                       |
| CODE:              | <b>017.120.0096.13993</b>                                               |
| GROUP:             | <b>GRUPO B1a UNE-EN 14411 Anexo G / SASO GSO ISO 13006:2022 Anexo G</b> |
| TILE TYPE:         | <b>GL</b>                                                               |
| FINISH:            | <b>RECTIFIED MATT</b>                                                   |
| FAMILY:            | <b>PORCELAIN TILES</b>                                                  |
| NUMBER OF DESIGNS: |                                                                         |

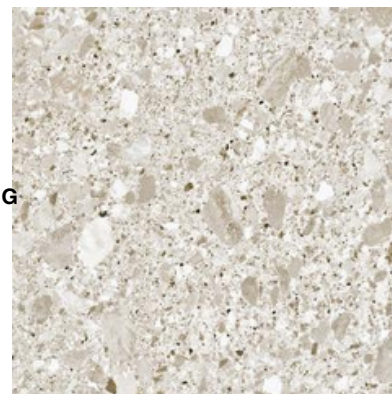

| TEST                                                                               |                     | RESULT                                            |
|------------------------------------------------------------------------------------|---------------------|---------------------------------------------------|
|    | UNE-EN ISO 10545-2  | DIMENSIONAL FEATURES                              |
|                                                                                    |                     | COMPLIES WITH THE STANDARD                        |
|    | UNE-EN ISO 10545-3  | WATER ABSORPTION                                  |
|                                                                                    |                     | <= 0,5 %                                          |
|    | UNE-EN ISO 10545-4  | MODULUS OF RUPTURE - BREAKING STRENGTH            |
|                                                                                    |                     | 1600-2400 N                                       |
|                                                                                    |                     | MODULUS OF RUPTURE - BENDING STRENGTH             |
|                                                                                    |                     | 35-45 N/mm2                                       |
|    | UNE-EN ISO 10545-6  | RESISTANCE TO DEEP ABRASION (MM3)                 |
|                                                                                    |                     | <130 mm3                                          |
|  | UNE-EN ISO 10545-7  | RESISTANCE TO SURFACE ABRASION                    |
|                                                                                    |                     | -                                                 |
|  | UNE-EN ISO 10545-8  | LINEAR THERMAL EXPANSION                          |
|                                                                                    |                     | <7,0 x 10-6 °C-1                                  |
|  | UNE-EN ISO 10545-9  | THERMAL SHOCK RESISTANCE                          |
|                                                                                    |                     | RESISTS                                           |
|  | UNE-EN ISO 10545-11 | CRAZING RESISTANCE                                |
|                                                                                    |                     | RESISTS                                           |
|  | UNE-EN ISO 10545-12 | FROST RESISTANCE                                  |
|                                                                                    |                     | RESISTS                                           |
|  | UNE-EN ISO 10545-13 | CHEMICAL RESISTANCE - AMMONIUM CHLORIDE 100 G/L   |
|                                                                                    |                     | A                                                 |
|                                                                                    |                     | CHEMICAL RESISTANCE - SODIUM HYPOCHLORITE 20 MG/L |
|                                                                                    |                     | A                                                 |
|                                                                                    |                     | CHEMICAL RESISTANCE - HYDROCHLORIC ACID 3%        |
|                                                                                    |                     | COMPLIES WITH THE STANDARD                        |
|                                                                                    |                     | CHEMICAL RESISTANCE - CITRIC ACID 100 G/L         |
|                                                                                    |                     | COMPLIES WITH THE STANDARD                        |
|                                                                                    |                     | CHEMICAL RESISTANCE - POTASSIUM HYDROXYDE 30 G/L  |
|                                                                                    |                     | COMPLIES WITH THE STANDARD                        |
|  | UNE-EN ISO 10545-14 | STAIN RESISTANCE - GREEN AGENT IN LIGHT OIL       |
|                                                                                    |                     | 5                                                 |
|                                                                                    |                     | STAIN RESISTANCE - IODINE SOLUTION IN ALCOHOL     |
|                                                                                    |                     | 5                                                 |
|                                                                                    |                     | STAIN RESISTANCE - OLIVE OIL                      |
|                                                                                    |                     | 5                                                 |

# TECHNICAL FEATURES

SLIP RESISTANCE

| TEST                                                                             |                                                            | RESULT                                            |
|----------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------|
|  | EN 16165:2022 Anexo C                                      | SLIP RESISTANCE (PENDULUM)                        |
|                                                                                  |                                                            | CLASE 1                                           |
|                                                                                  | EN 16165:2022 Anexo A - Pie calzado                        | CRITICAL ANGLE OF SLIP (INCLINED PLATFORM)        |
|                                                                                  |                                                            | R9                                                |
|                                                                                  | EN 16165:2022 Anexo A - Pie descalzo                       | CRITICAL ANGLE OF SLIP. WET-LOADED BAREFOOT AREAS |
|                                                                                  |                                                            | -                                                 |
| BS7976 (PTV) WET                                                                 | CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) WET | -                                                 |
| EN 16165:2022 Anexo B                                                            | DYNAMIC COEFFICIENT OF FRICTION (DCOF) OF RIGID FLOORS.    | -                                                 |

| TEST                                                                             | VALOR UPEC         |
|----------------------------------------------------------------------------------|--------------------|
|  | UPEC CERTIFICATION |
|                                                                                  | -                  |

Declaration of Performance:  
[https://www.pamesa.com/ERP/4.0/empresas/151/045/ficheros/t00030006/113/DdP\\_DoP\\_N003CPR2013.pdf](https://www.pamesa.com/ERP/4.0/empresas/151/045/ficheros/t00030006/113/DdP_DoP_N003CPR2013.pdf)