


TECHNICAL FEATURES

MODEL:	CORALSTONE PERLA
FORMAT:	90x90(N)
THICKNESS(mm):	
DATE:	14/01/2026
CODE:	017.090.0037.14782
GROUP:	GRUPO B1a UNE-EN 14411 Anexo G / SASO GSO ISO 13006:2022 Anexo G
TILE TYPE:	GL
FINISH:	RECTIFIED MATT
FAMILY:	PORCELAIN TILES
NUMBER OF DESIGNS:	

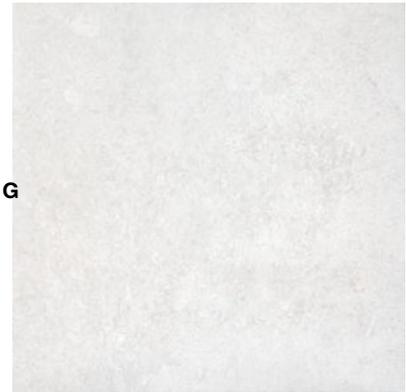

TEST		RESULT
	UNE-EN ISO 10545-2	DIMENSIONAL FEATURES COMPLIES WITH THE STANDARD
	UNE-EN ISO 10545-3	WATER ABSORPTION <= 0,5 %
	UNE-EN ISO 10545-4	MODULUS OF RUPTURE - BREAKING STRENGTH 1600-2400 N
		MODULUS OF RUPTURE - BENDING STRENGTH 35-45 N/mm2
	UNE-EN ISO 10545-6	RESISTANCE TO DEEP ABRASION (MM3) <130 mm3
	UNE-EN ISO 10545-7	RESISTANCE TO SURFACE ABRASION PEI IV
	UNE-EN ISO 10545-8	LINEAR THERMAL EXPANSION <7,0 x 10-6 °C-1
	UNE-EN ISO 10545-9	THERMAL SHOCK RESISTANCE RESISTS
	UNE-EN ISO 10545-11	CRAZING RESISTANCE RESISTS
	UNE-EN ISO 10545-12	FROST RESISTANCE RESISTS
	UNE-EN ISO 10545-13	CHEMICAL RESISTANCE - AMMONIUM CHLORIDE 100 G/L A
		CHEMICAL RESISTANCE - SODIUM HYPOCHLORITE 20 MG/L A
		CHEMICAL RESISTANCE - HYDROCHLORIC ACID 3% COMPLIES WITH THE STANDARD
		CHEMICAL RESISTANCE - CITRIC ACID 100 G/L COMPLIES WITH THE STANDARD
		CHEMICAL RESISTANCE - POTASSIUM HYDROXYDE 30 G/L COMPLIES WITH THE STANDARD
	UNE-EN ISO 10545-14	STAIN RESISTANCE - GREEN AGENT IN LIGHT OIL 5
		STAIN RESISTANCE - IODINE SOLUTION IN ALCOHOL 5
		STAIN RESISTANCE - OLIVE OIL 5

TECHNICAL FEATURES


SLIP RESISTANCE

	TEST		RESULT
	EN 16165:2022 Anexo C	SLIP RESISTANCE (PENDULUM)	CLASE 1
	EN 16165:2022 Anexo A - Pie calzado	CRITICAL ANGLE OF SLIP (INCLINED PLATFORM)	R9
	EN 16165:2022 Anexo A - Pie descalzo	CRITICAL ANGLE OF SLIP. WET-LOADED BAREFOOT AREAS	-
	BS7976 (PTV) WET	CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) WET	36+
	EN 16165:2022 Anexo B	DYNAMIC COEFFICIENT OF FRICTION (DCOF) OF RIGID FLOORS.	-

TEST		VALOR UPEC
	UPEC CERTIFICATION	-

TECHNICAL FEATURES

MODEL:	CORALSTONE PERLA
FORMAT:	60x120(n)
THICKNESS(mm):	
DATE:	14/01/2026
CODE:	017.250.0037.14782
GROUP:	GRUPO B1a UNE-EN 14411 Anexo G / SASO GSO ISO 13006:2022 Anexo G
TILE TYPE:	GL
FINISH:	RECTIFIED MATT
FAMILY:	PORCELAIN TILES
NUMBER OF DESIGNS:	

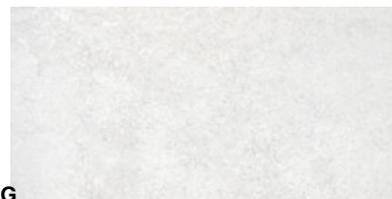

TEST	RESULT	
 UNE-EN ISO 10545-2 DIMENSIONAL FEATURES	COMPLIES WITH THE STANDARD	
 UNE-EN ISO 10545-3 WATER ABSORPTION	<= 0,5 %	
 UNE-EN ISO 10545-4 MODULUS OF RUPTURE - BREAKING STRENGTH	1600-2400 N	
	MODULUS OF RUPTURE - BENDING STRENGTH	35-45 N/mm2
 UNE-EN ISO 10545-6 RESISTANCE TO DEEP ABRASION (MM3)	<130 mm3	
 UNE-EN ISO 10545-7 RESISTANCE TO SURFACE ABRASION	PEI IV	
 UNE-EN ISO 10545-8 LINEAR THERMAL EXPANSION	<7,0 x 10-6 °C-1	
 UNE-EN ISO 10545-9 THERMAL SHOCK RESISTANCE	RESISTS	
 UNE-EN ISO 10545-11 CRAZING RESISTANCE	RESISTS	
 UNE-EN ISO 10545-12 FROST RESISTANCE	RESISTS	
 UNE-EN ISO 10545-13	CHEMICAL RESISTANCE - AMMONIUM CHLORIDE 100 G/L	A
	CHEMICAL RESISTANCE - SODIUM HYPOCHLORITE 20 MG/L	A
	CHEMICAL RESISTANCE - HYDROCHLORIC ACID 3%	COMPLIES WITH THE STANDARD
	CHEMICAL RESISTANCE - CITRIC ACID 100 G/L	COMPLIES WITH THE STANDARD
	CHEMICAL RESISTANCE - POTASSIUM HYDROXYDE 30 G/L	COMPLIES WITH THE STANDARD
 UNE-EN ISO 10545-14	STAIN RESISTANCE - GREEN AGENT IN LIGHT OIL	5
	STAIN RESISTANCE - IODINE SOLUTION IN ALCOHOL	5
	STAIN RESISTANCE - OLIVE OIL	5

TECHNICAL FEATURES

SLIP RESISTANCE

	TEST		RESULT
	EN 16165:2022 Anexo C	SLIP RESISTANCE (PENDULUM)	CLASE 1
	EN 16165:2022 Anexo A - Pie calzado	CRITICAL ANGLE OF SLIP (INCLINED PLATFORM)	R9
	EN 16165:2022 Anexo A - Pie descalzo	CRITICAL ANGLE OF SLIP. WET-LOADED BAREFOOT AREAS	-
	BS7976 (PTV) WET	CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) WET	36+
	EN 16165:2022 Anexo B	DYNAMIC COEFFICIENT OF FRICTION (DCOF) OF RIGID FLOORS.	-

TEST		VALOR UPEC
	UPEC CERTIFICATION	-
