


Installing Mac Print Drivers

Download latest UFR drivers from Canon.ca ([support & drivers](#)) or from <http://support.digitex.ca>


Open the folder you downloaded

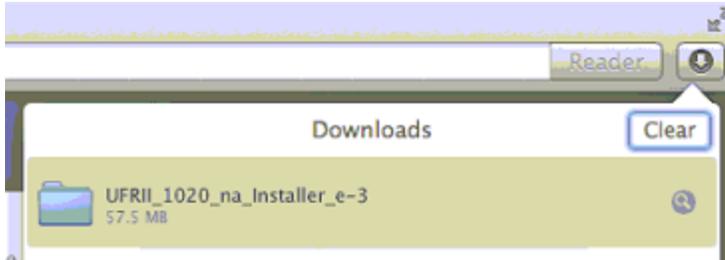


Open the PKG file

Name	Date Modified	Size	Kind
Documents	Yesterday, 1:45 PM	--	Fold
UFR11_LT_LIPS_LX_Installer.pkg	Sep 23, 2013, 8:15 PM	46.6 MB	Inst


Continue

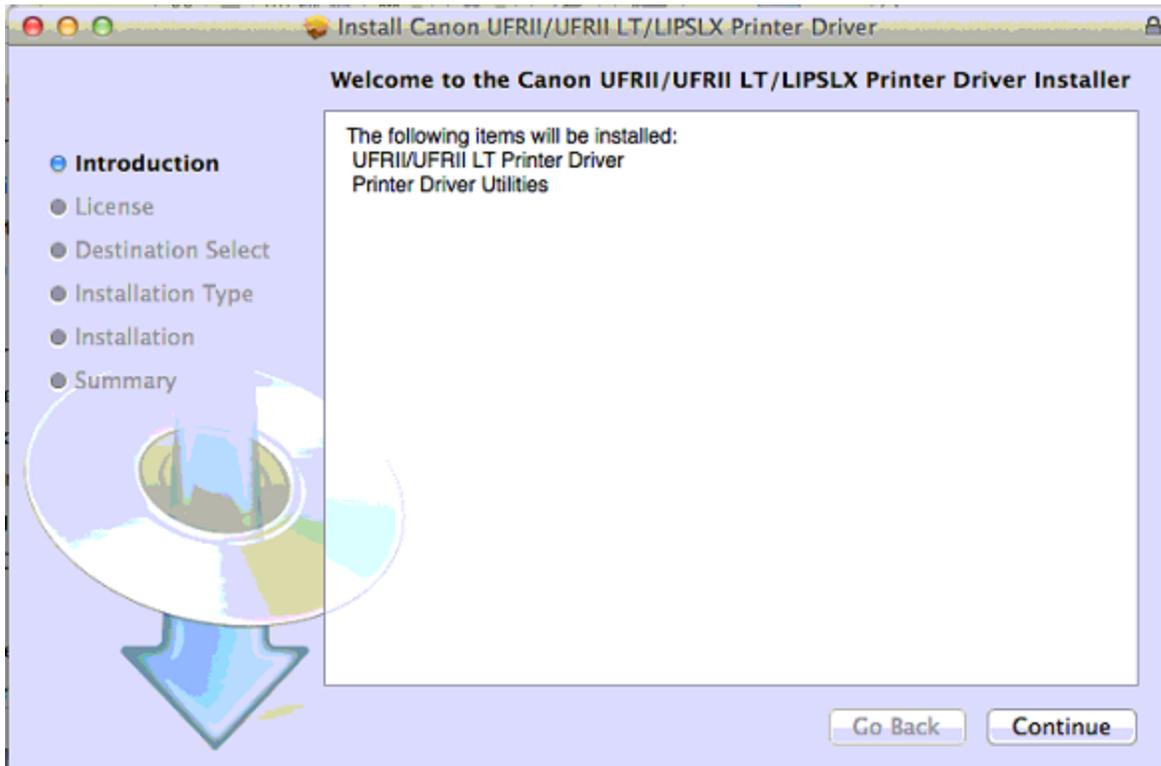


Continue

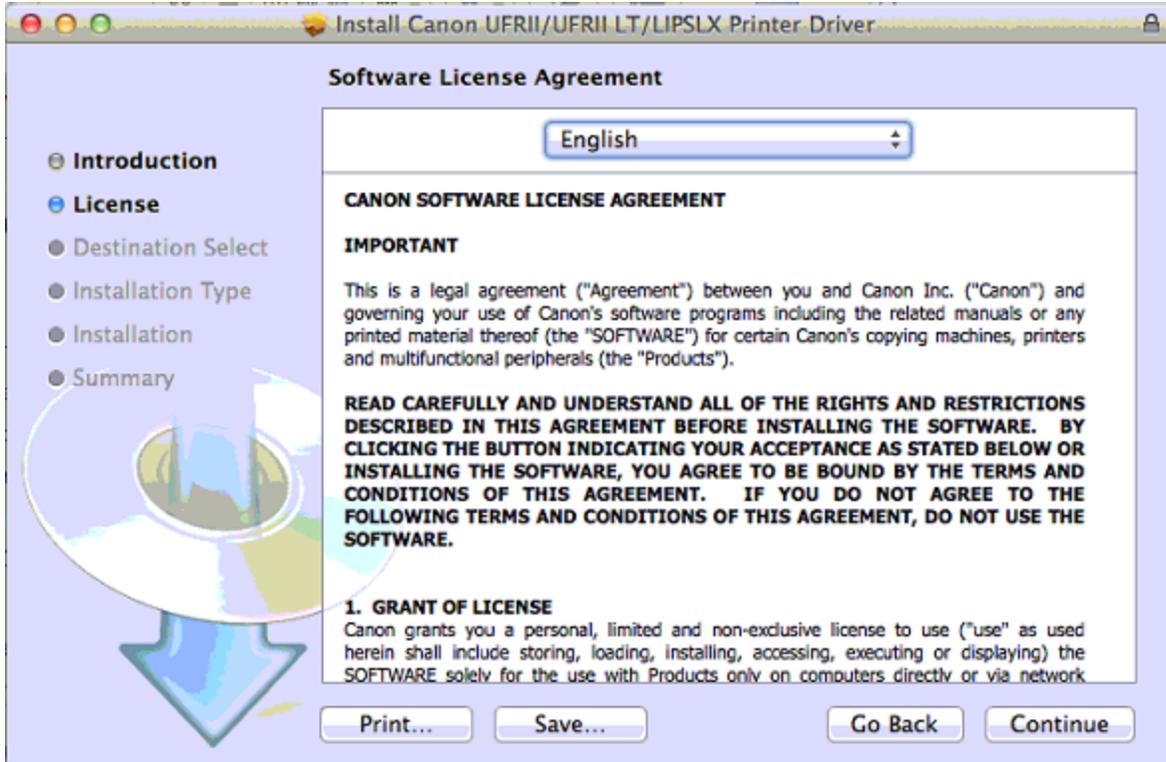


Agree

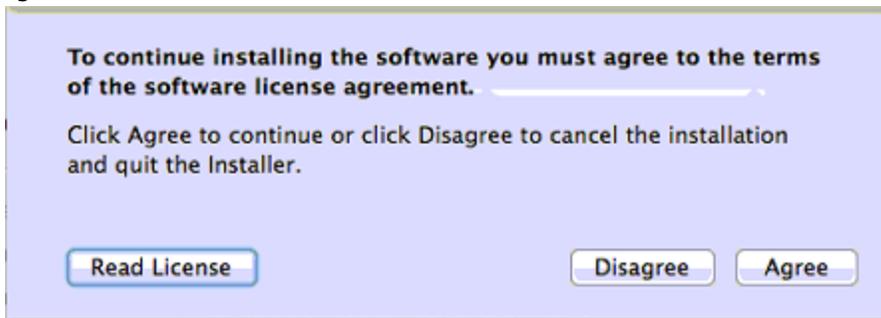


Continue

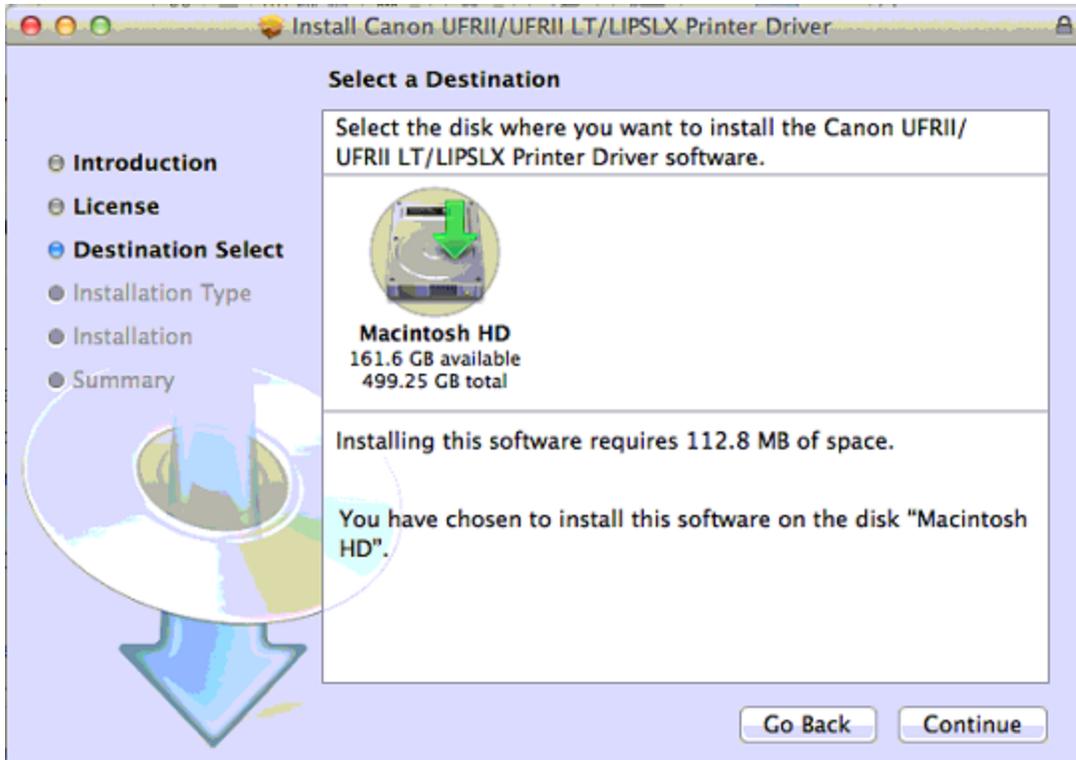


Install

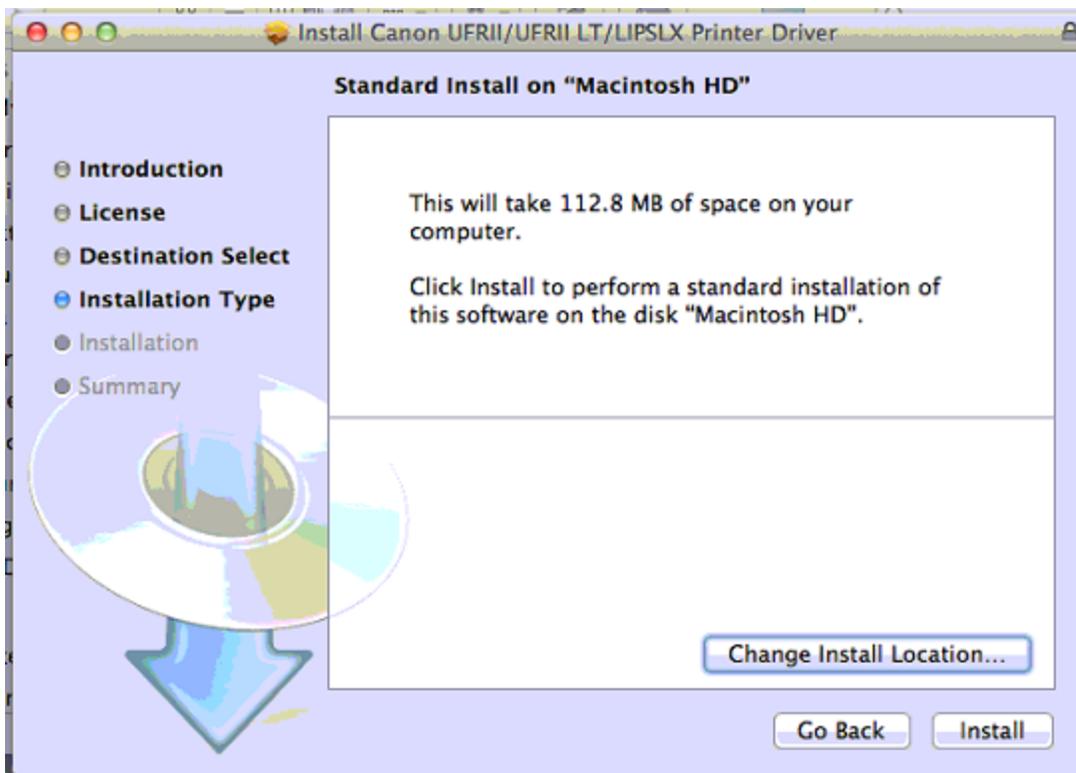

Enter your computer password and hit Install Software

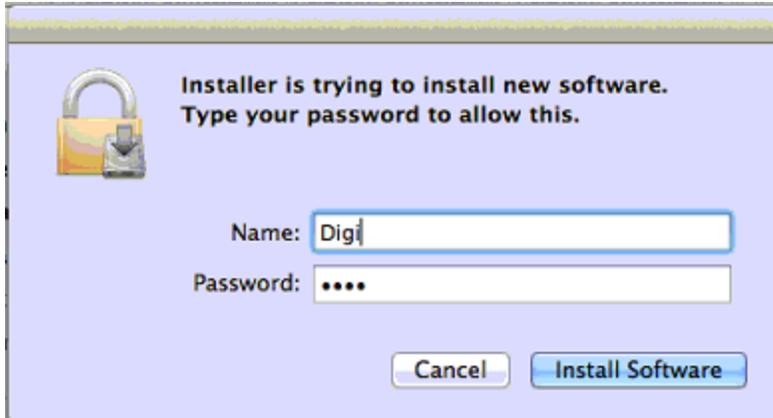


After installation is complete hit Close

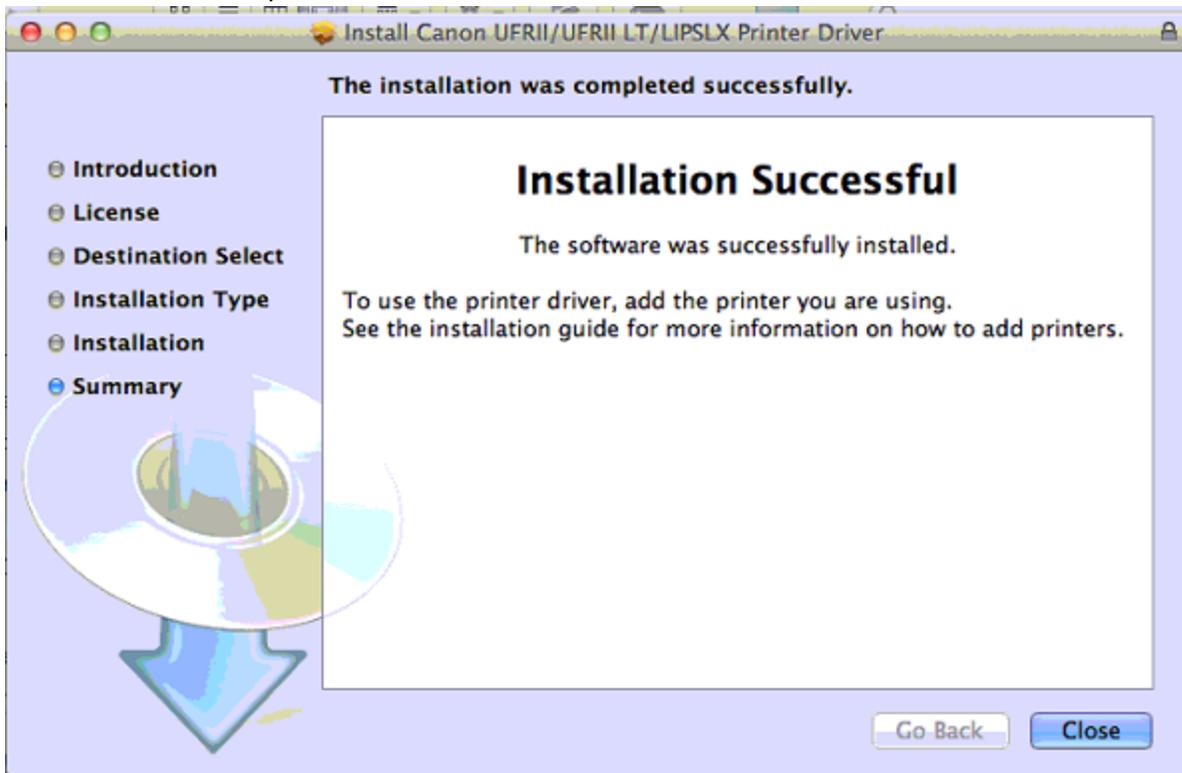


Reboot if possible (saves possible problems)

hit apple -> system preferences

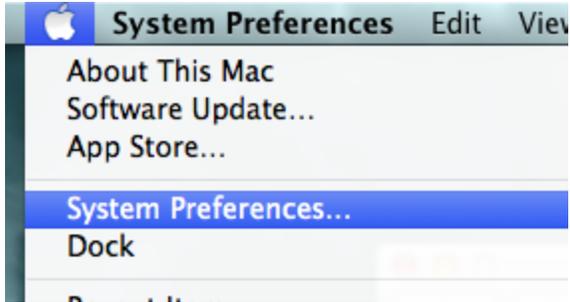

Select Printers and Scanners




hit the little + (if it is greyed out click on the lock to unlock it)




choose "IP" printer




enter IP address of printer
for protocol select "Line printer daemon - lpd"
in queue type "lp" (L P in small)
Change the name to whatever you like

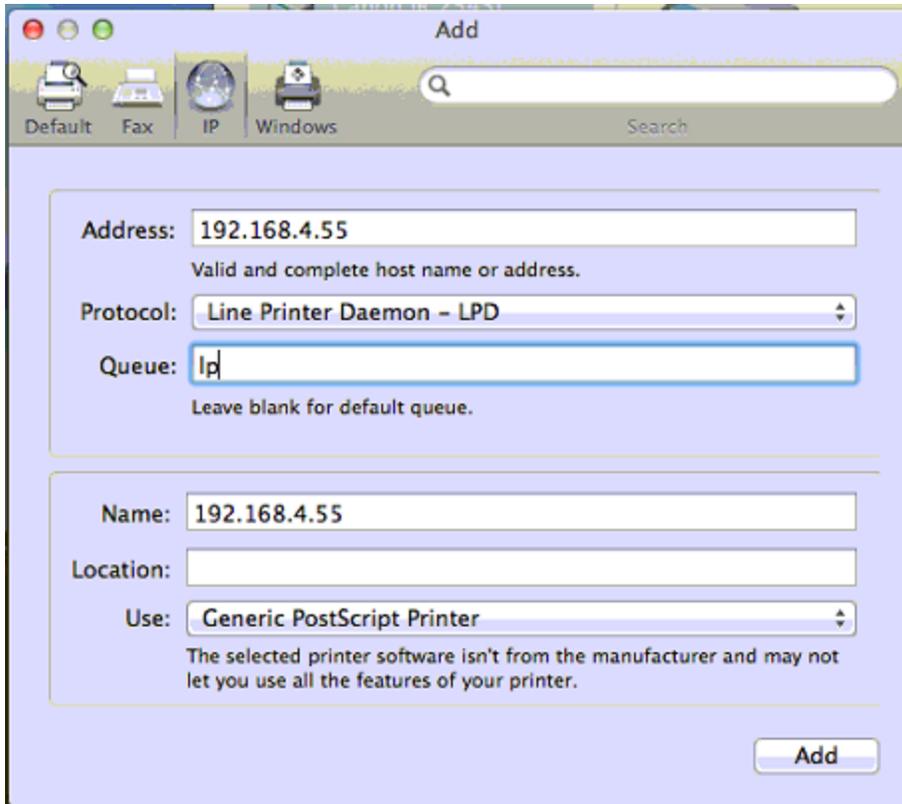

select the print using dropdown to "select printer software"

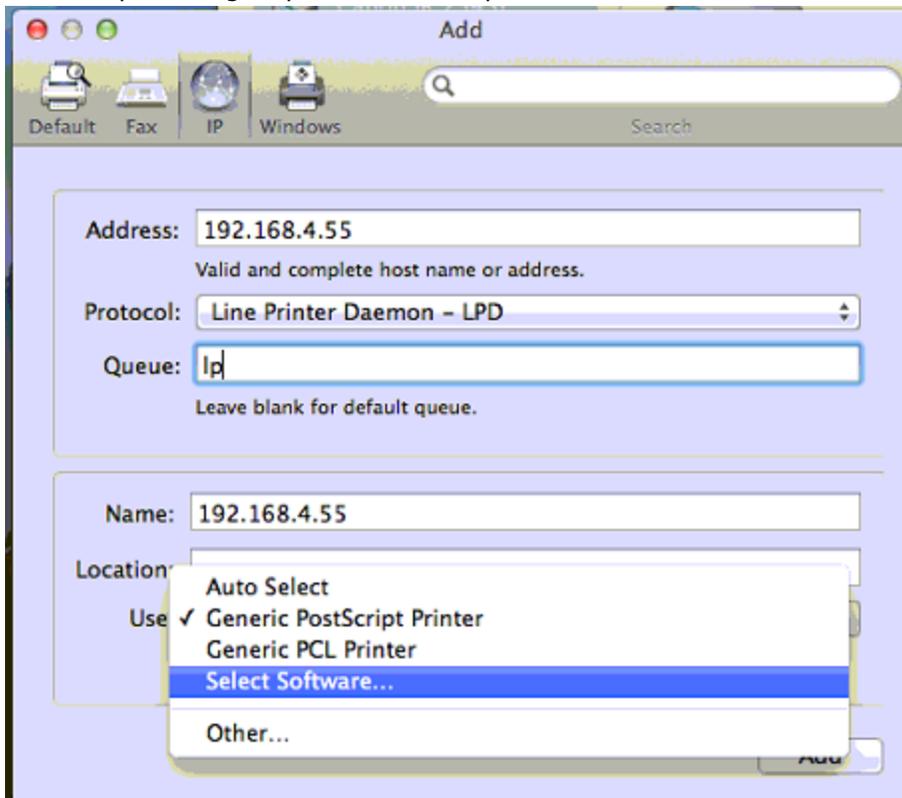


use the search field to select the appropriate driver and hit OK

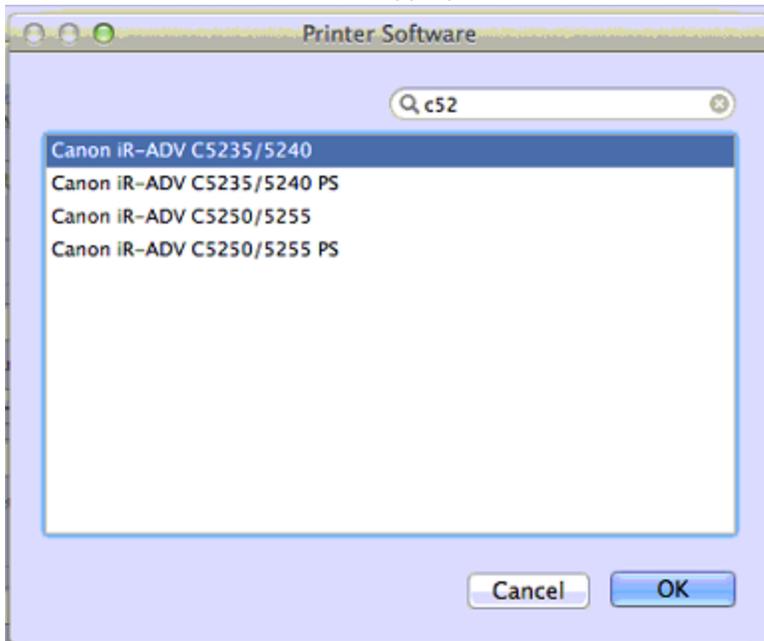


with latest drivers probably wont have a "UFR" at the end

click Add

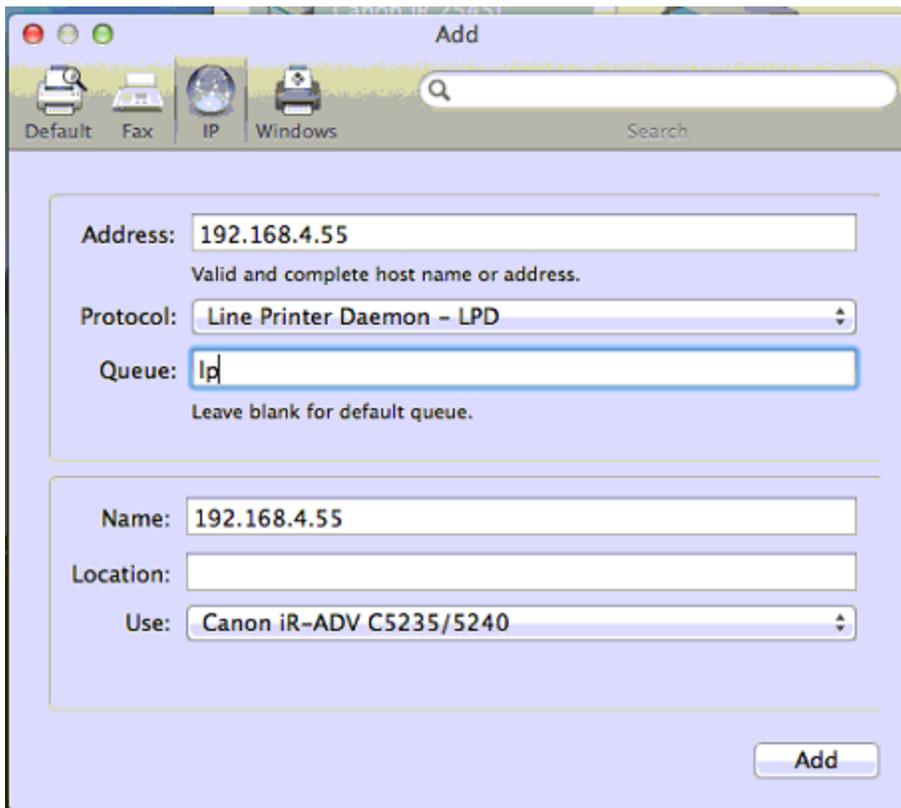

To select options if applicable (finishers etc)
Select the printer and hit Options & Supplies

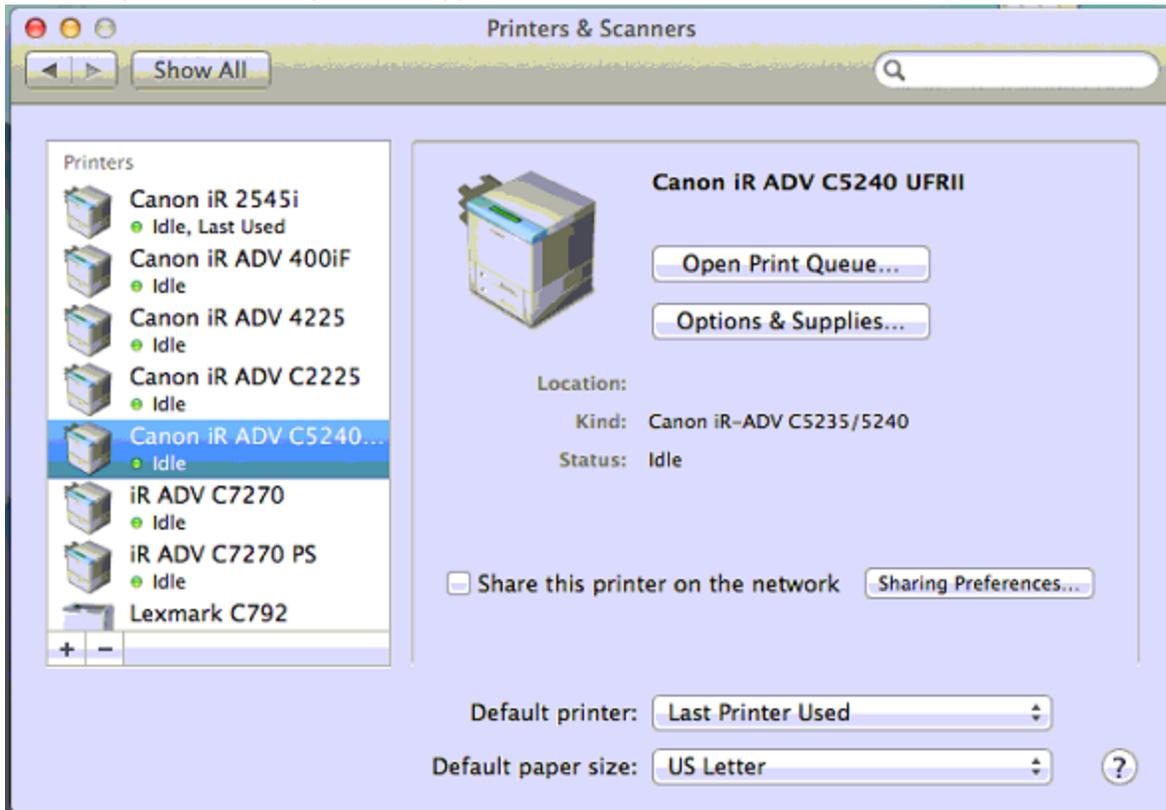

Click on the options tab and select the appropriate accessories to match your copier (eg Cassette Feeding Unit is a tray 3 and 4, Output Options Booklet Finisher, etc) and hit OK

