

Programming a Somfy io local control point



Only one receiver must be powered at a time.

- Switch on the power supply.
- Press the Up/Down buttons on the Somfy io local control point simultaneously and follow procedure “a” or “b” depending on how the heating card reacts:

a) Heater turns on 100% then goes out

Briefly press the PROG button on the Somfy io local control point: the light comes on then goes out again to indicate that the Somfy io local control point has been programmed into the io On/Off Lighting Receiver.

b) Heater turns not on 100%


Press the Up button.

c) Heater turns on:

The Somfy io control point has been programmed.

d) Heater turns not on:

- Check the connection, the power supply and try again.
- If the wiring seems correct, go to section 6.5 « Restoring the original configuration ».

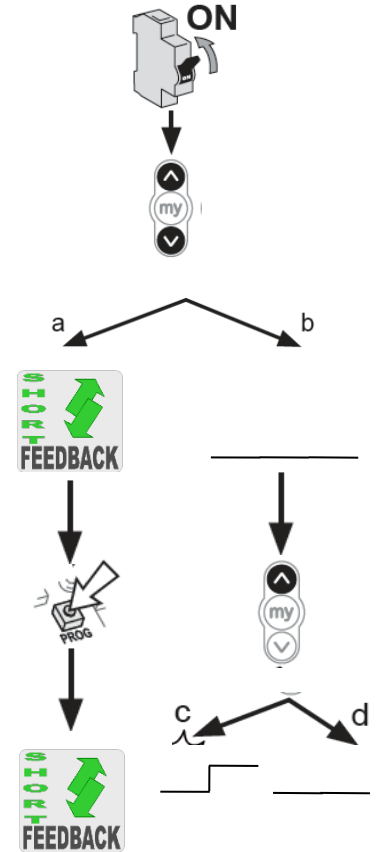

1.1. Use

- 1) To switch **on** the heater:
 - Press the Up button.



- 2) To turn **off** the heater:
 - Press the Down button.



- 3) To immediately switch on at the pre-set «my» favorite heating intensity (default 66%):
- Press the «my» button.



- 4) To increase the heat intensity:
- Press and hold the Up button until the desired heat intensity is reached.



- 5) To reduce the heat intensity:
- Press and hold the Down button until the desired heat intensity is reached.

