




# Start Right Smart Guide – Multi Dwelling Unit

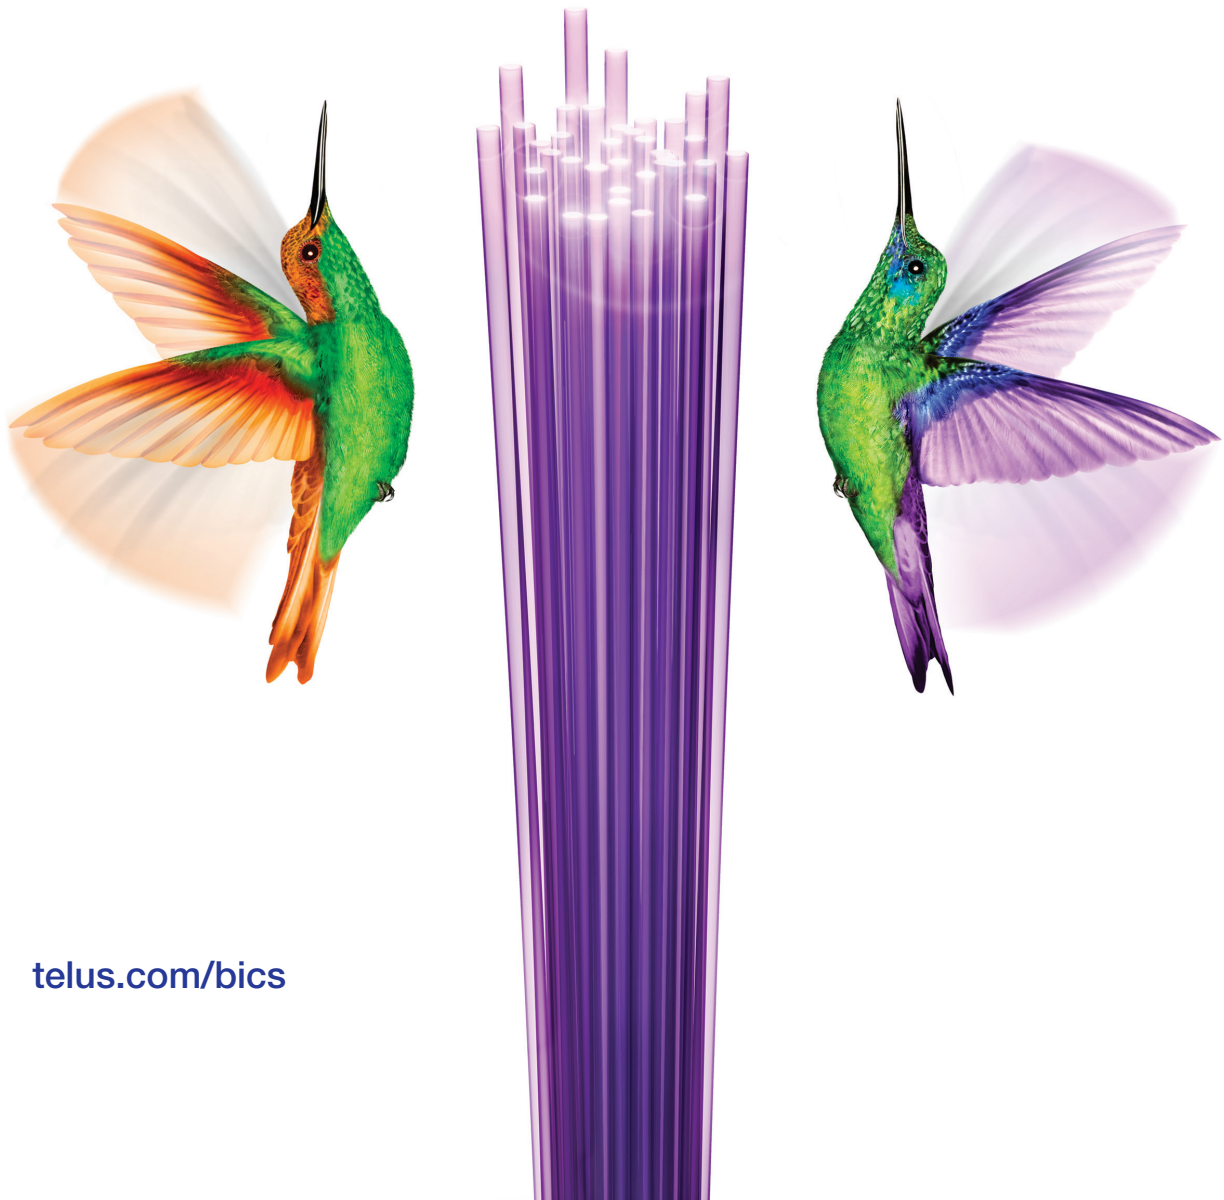

# Multi Dwelling Unit (MDU) – In Suite Cabling

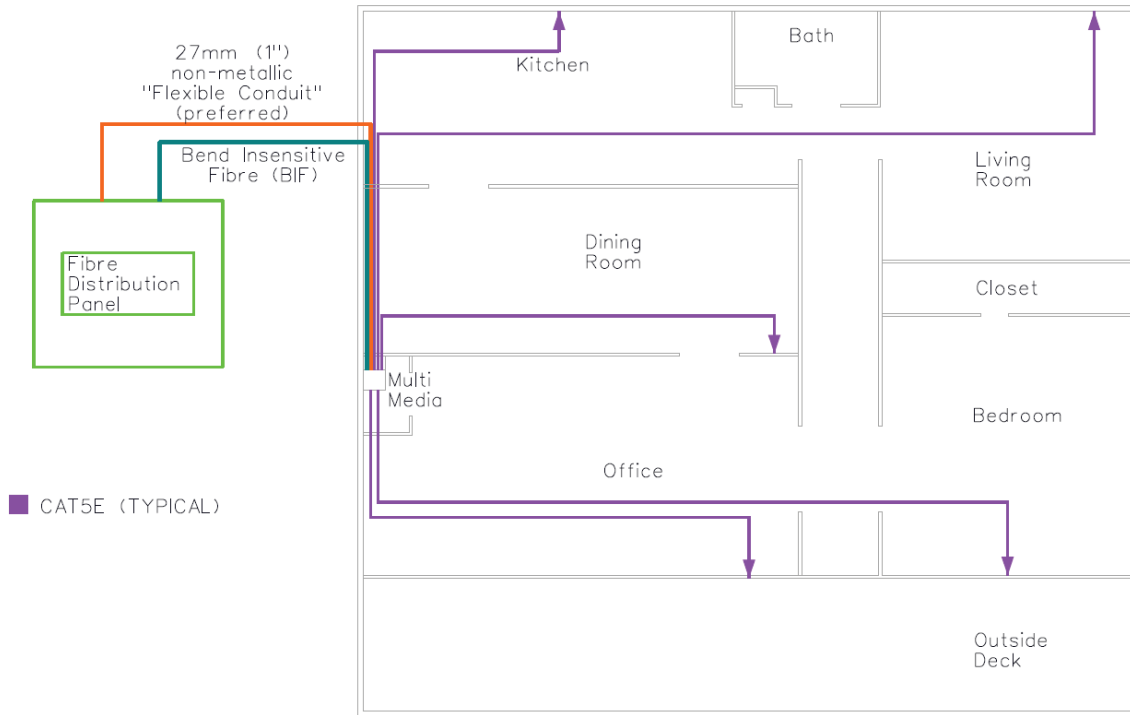

1. The inside wiring should be done in a Star Configuration where the individual set runs of CAT5e cable run from each telephone, data and TV locations, and collect at a multimedia box within the suite. A separate run of CAT5e is required for each service at every location.
2. Builder/owner will provide one (1) duplex 15A non-switched power receptacle dedicated to home networking, communication and entertainment equipment; installed in a multimedia enclosure at this location. The use of a multimedia enclosure or smart panel is preferred.
3. Owner/builder will provide patch panels for Voice/Data/Coax.
4. If a multimedia enclosure is not used, a wall space area of 600 mm X 900 mm (24" X 36") is required to accommodate all equipment along with one (1) duplex 15A non-switched power receptacle dedicated.

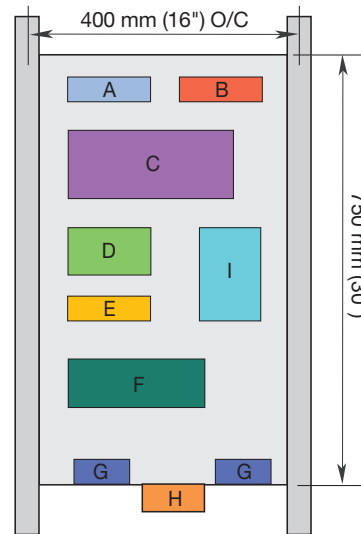

- A** Telephone Termination Strip Voice
- B** Data/IPTV Termination Strip
- C** Telco Equipment
- D** Fibre To The Home (FTTH)
- E** COAX Terminations
- F** CATV Equipment
- G** Power Adapters for Electronics
- H** 120VAC Inside Smart Panel
- I** UPS Power Supply

## New Market Operations

4DEV@telus.com | 310-4DEV (4338)

You can reach us by email at [4DEV@telus.com](mailto:4DEV@telus.com) or by phone at 310-4DEV (4338) 8:30 a.m. to 4:30 p.m. (PST) Monday through Friday. Please visit us at [telus.com/bics](http://telus.com/bics) for additional information.