


Crescent

DA-DP-SDI

Display Port 1.2 to SDI converter

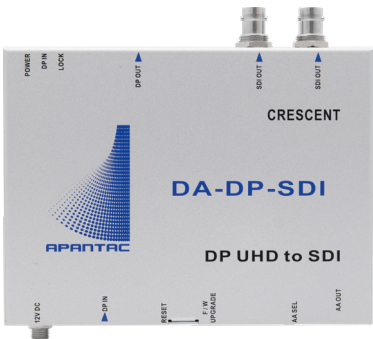

DA-DP-SDI

Key Features


- Compact Display Port to SDI converter
- Support Display Port 1.2 Input
- SDI output (up to 12G SDI)
- Analog stereo output
- Audio pair output selection via rotary switch
- 12V DC

Front View



- 12V DC
- Display Port Input
- Reset Button
- FW Upgrade Port
- Rotary switch for audio pair selection
- Stereo Audio output

Rear View



- SDI Output 1
- SDI Output 2
- DP Output
- LED Status

Related Products

- DA-SDI-HDTV-II**
SDI to HDMI converter
- DA-HDTV-SDI-UHD**
12G to HDMI 2.0 converter

Specifications

Model	DA-DP-SDI
Description	DP to SDI converter
Inputs	1 x Display Port
Outputs	2 x SDI output, 1 Display Port loop out
Audio	AA output with rotary selector for each pair
Power	12V 1A
Weight	710 g
Dimension	152 x 114 x 28 mm (W x D x H)