


openGear

OG-DA-HDTV-SDI-UHD

HDMI 2.0 to SDI Converter with Looping input and Fiber output

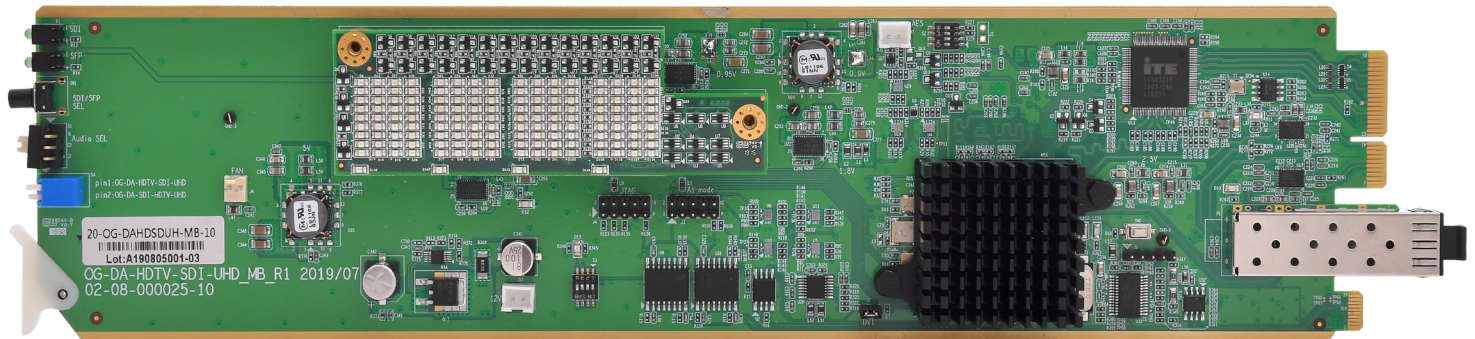

OG-DA-HDTV-SDI-UHD-MB


Key Features

- openGear 3.0 card-based form factor
- Dashboard control enabled
- Supports HDMI 2.0 video input and loop out
- Supports up to UHD@60Hz (4:4:4)
- Outputs up to 12G SDI
- Optional 12G SDI fiber output via SFP
- Status LEDs
- Stereo AES and AA audio monitoring outputs
- Low power consumption
- 5 year limited warranty

OPENGear

OG-DA-HDTV-SDI-UHD

OG-DA-HDTV-SDI-UHD-RM Rear Module (2 slots)



- 1x HDMI input
- 1x HDMI loop out
- 1x SDI output
- 1x optional SFP Fiber output

How to Order

OG-DA-HDTV-SDI-UHD-SET-1
OG-DA-HDTV-SDI-UHD-MB +
OG-DA-HDTV-SDI-UHD-RM

Related Products

- OGX-FR-CN-P**
openGear X frame with
advanced network card
- OG-DA-SDI-HDTV-UHD-SET-1**
openGear based 12G to
HDMI 2.0 converter without
scaler
- OG-US-3000-SET-1**
openGear based Universal
Scaler without genlock
- OG-US-3500-SET-1**
openGear based Universal
Scaler with genlock
- OG-HDTV-SDI-SET-1**
openGear based HDMI to
converter without scaler

Specifications

Model	DA-HDTV-SDI-UHD		
HDMI Inputs	1 x HDMI up to UHD	Analog audio Output	Selectable stereo pair
HDMI Outputs	1 x HDMI up to UHD	AES audio Output	Selectable stereo pair
SDI Output	Up to 12G SDI	Switch	Between fiber and BNC
Optional Fiber Output	1 x SFP	Control	Dashboard