

HAPPY HUMAN WARRANTY



SoundTools products are built to endure even the harshest live sound and audio environments. We are so confident in the reliability of our SoundTools products that every unit is covered by the Happy Human Warranty. If for any reason you're unhappy with any of your SoundTools products, simply return it to the place of purchase in its original packaging within one year for a full refund, no questions asked.

SoundTools road-tests all products for lifelong durability. If you experience any unhappiness after the one year warranty then we will happily replace your SoundTools product with a new or reconditioned unit, for life.


For warranty help, please contact your local dealer, email us at support@soundtools.com, or visit soundtools.com/support-warranty.html

THANK YOU!

We hope you enjoy your new SoundTools CAT Box 8. One of our main goals here at SoundTools is to create useful and quality tools for every SoundHuman's toolbox. If you ever have questions or want to share a cool way you've been using your SoundTools product, please reach out!

We'd love to see your product in action! Tag us and don't forget to #SoundTools


@RatSoundTools



CONTACT US

 486 CONSTITUTION AVE
CAMARILLO, CA 93012

 SUPPORT@SOUNDTOOLS.COM

 (805) 383 -0777

 SOUNDTOOLS.COM


CAT BOX 8 STARTER GUIDE

Made For And By Sound Humans

CAT Box 8 - 4/8 channel stage box*


Step 1:

Connect analog XLR, AES3, COM, or other 3-pin XLR based signals into the male or female XLR's.

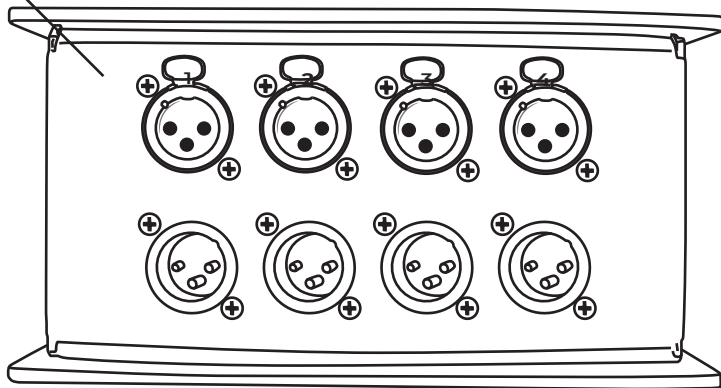

Step 2:

Connect a shielded CAT5e/6/7 cable into the "IN/OUT" or PARALLEL etherCON jack and connect the other end of the cable to a SoundTools CAT Box 8, CAT Box, CAT Tails, or other RAT CAT analog audio over CAT unit.

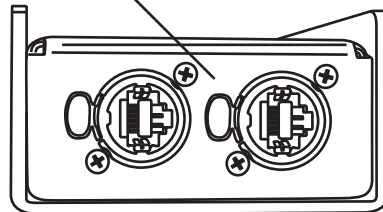

The CAT Box 8 is compatible with AES3, DMX, COM, and other 3-pin XLR based signals, and is AES72-20 compliant.

*For 8 channel operation, remove an internal jumper. Scan the QR code for more info.

