



ANRIN HYDROTEC

SCANDIC SN 640/270

ISO 9001-2015

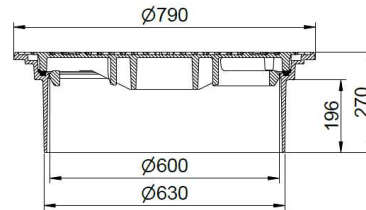

SA0712-01/02

Reference	Class	Standard	Material	Weight	Sold by Pallet
894712	D 400	DIN EN 124	EN-GJS	ca. 105 kg	3

SCANDIC SN 640

The intelligent solution of self-leveling/floating frame. Loading class D400 for use on carriageways of roads for areas with medium traffic (MT).

Frame

- self-levelling / roll-in frame
- becomes an integrated part of the road surface
- relief on the shaft of up to 80%
- suitable for shafts of dia. 640/650mm
- leveling height ca. 190mm

Insert

- HYDROopen, changeable dampening insert
- long life, high abrasion stability for extreme loads

Locking

- innovative 2 point spring locking system
- hinders unauthorised opening = anti-theft
- through the positioning of the locking points the cover is centred in the frame and is frictionally locked

Options

- SCANDIC SN 640 with adapter frame (8947121)
- SCANDIC SN 600
- Cover with PUR-insert D400
- SCANDIC SN 700

optimised cover design



movement lock and locking position




2 point locking system



ANRIN Nordic AB
Telivägen 8
14941 NYNÄSHAMN

 info@hydrotec.se

 www.hydrotec.se

 +46-(0)10-209 9 209