

Taymor | PRODUCT SPECIFICATIONS

FEATURES

- SINGLE LEVER HANDLE WITH PULL-OUT SPRAY AND DETACHABLE ESCUTCHEON
- FITS STANDARD 8" THREE HOLE SINK
- CERAMIC CARTRIDGE
- MAXIMUM FLOW RATE: 2.2 GPM/8.3 LPM @ 60 PSI
- > SOLID BRASS & COPPER WATERWAYS
- FACTORY PRESSURE TESTED
- > LOW LEAD COMPLIANT



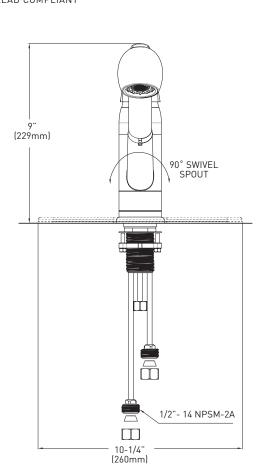

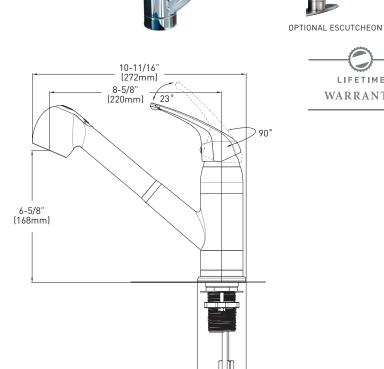

KITCHEN FAUCET

MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS

CONSTRUCTION

- METAL CONSTRUCTION
- > BRASS VALVE BODY

MOUNTING

- > DESIGNED TO INSTALL THROUGH 1 HOLE, 1-5/8" (42mm) MIN. DIA. ON DECKS UP TO 1-3/4" [45mm]
- > OPTIONAL ESCUTCHEON INCLUDED TO INSTALL THROUGH 3 HOLES WITH 8" (203mm) CENTERS, ON DECKS UP TO 1-7/8" (47mm)

INLET

- > 1/4" O.D. COPPER SUPPLY TUBES WITH 1/2"-14 NPSM ADAPTERS OPERATION
- > PIVOT ACTION LEVER STYLE HANDLE
- > OPERATES WITH LESS THAN 5 LBS. OF FORCE

WATER-CONTROL MECHANISM

- > CARTRIDGE

FLOW

> AERATOR LIMITS MAXIMUM FLOW RATE TO 2.2 GPM MAX. (8.3 L/MIN.) @ 60 PSI

MEETS ADA

> STANDARDS

2-7/16

(62mm)

CODES/STANDARDS APPLICABLE

- → ASME A112.18.1/CSA B125.1
- ANSI/NSF 372
- > cUPC CERTIFIED
- > LOW LEAD COMPLIANT

GUARANTEE

- > LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- > 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND **BUSINESS INSTALLATIONS**

> ONE-PIECE, SELF-CONTAINED CERAMIC DISC VALVE		
DESCRIPTION	POLISHED CHROME	CASE QTY.
SINGLE LEVER HANDLE KITCHEN FAUCET WITH PULL OUT SPRAY AND DETACHABLE ESCUTCHEON	06-8831S	6

