



Sections

**09** 09 97 00  
Special Coatings



## APPLICATION INSTRUCTIONS

### APPLICATION

#### Surface Prep

1. New "green" concrete must be properly cured. Concrete should obtain 80% of design strength, typically achieved within 14-28 days.
2. The concrete substrate must be structurally sound and clean of oil, grease, dirt, wax, curing compounds, efflorescence, paints, previous sealers, adhesives and other contaminants that might interfere with the penetration of the sealer. Power wash, acid etch or mechanically scarify as necessary to achieve the desired surface condition. If acid was used to clean the concrete, neutralize the surface and rinse with water prior to application. Allow for proper dry time before application. The surface-zone moisture content of the concrete should not exceed 4% wt. Do not apply if standing water is visible.
3. Surface and air temperatures must be at least 60°F during application. Surface and air temperatures should not exceed 90°F. Do not apply when temperatures are expected to fall below 32°F within 8 hours or when rain is expected within 12 hours following application. Keep material from freezing. If freezing conditions exist before application, let the substrate thaw before application. Do not apply during inclement weather or when inclement weather is expected within 12 hours.
4. Crack, patching and expansion joint sealants can be applied before application; always test for compatibility and adhesion.
5. Protect people, property, vehicles, window glass, roofing materials, plastic products, shrubbery, landscaping and all surfaces not set for treatment from overspray.

#### Application - Ready to Use

1. Always test a small area before application to ensure desired performance, aesthetics, coverage rates and to verify application technique. Let test area dry thoroughly, 5-7 days, before inspection.
2. One continuous, thin, uniform coat is needed to ensure complete coverage. Apply with a good quality roller or brush. Too thick of an application will result in entrapment and subsequent product failure. If it starts to rain, stop treatment and cover the treated areas.

3. If an additional coat is desired wait at least 3 hours and ensure the first coat has completely dried before applying a second coat. Press on the coating with your thumb to verify that no fingerprint impression is left. If no impression is created, then the recoat can be started. Always remember that colder temperatures will require more cure time for the product before recoating can commence. We do not recommend any coatings be placed over this product except multiple coats of this product itself.

#### Dry Time


Typical drying time is 4-6 hours at 70°F and 50% relative humidity. Cooler temperatures or higher relative humidity can extend the drying time. Treated surfaces will be ready for pedestrian and vehicle traffic within 24 hours.

#### Clean Up

Clean equipment and tools with xylene. Unused or old material may be disposed of in a waste disposal site in accordance with local, state and federal laws.

#### Precautions/Safety

Avoid contact with skin, eyes and clothing, do not take internally. Use appropriate safety equipment during application and handling. Please refer to the safety data sheet (SDS) for additional precautionary instructions before use.

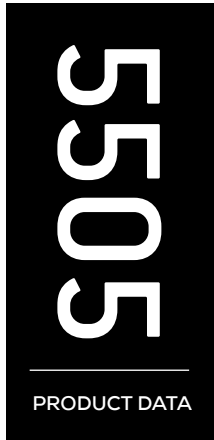

Sections

**09** 09 97 00  
Special Coatings



## APPLICATION INSTRUCTIONS

### APPLICATION

#### Best Performance

- Proper application is the responsibility of the user.
- Make sure the most current versions of technical data sheets and safety data sheets are being used.
- Do not use in immersion service or constant chemical exposure areas.
- Extremely porous substrates such as pavers may require additional coats to achieve a slight enhancement.

#### Coverage

1 coat: 100 - 300 square feet per gallon. Variations in texture and porosity of substrate will affect the coverage and performance of the product.

#### For professional use only.

Last revised 4/18

*User shall determine the suitability of the product for the intended use and assume all risks and liability in connection therewith.*