








 Airbag	 Low-voltage battery (lead-acid)	 Gas strut / preloaded spring	 High strength zone
 High-voltage power cable	 High-voltage battery (Li-ion)	 Seat belt pretensioner	 SRS control unit
 Cable cut location			

1 Identification / recognition

The Rivian R2 has the following identifying characteristics.


Front

- Rivian Compass logo hood ornament
- Stadium headlights



Side

- Rivian name on front fender




Rear

- Rivian name and model on the liftgate


2 Immobilisation / stabilization / lifting




1. Chock the wheels.
2. Open the driver or curbside door.



3. Shift into **P** (Park).

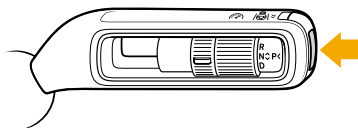

4. Use safe lift points.

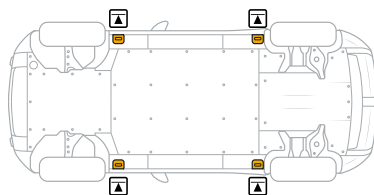


IMPORTANT

Do not use jacks or lifting equipment such as airbags under the battery pack.


3 Disable direct hazards / safety regulations




1. Open the hood using the key fob, phone, the Open Hood button on the center display, or the sensor above the grille.

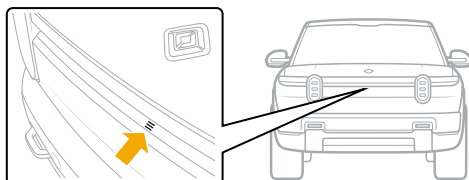


2. Use a Halligan bar or hydraulic spreader to pry open the hood if these methods aren't available.
3. Find the cut loop under the air intake cover.



4. Pull up the air intake cover.

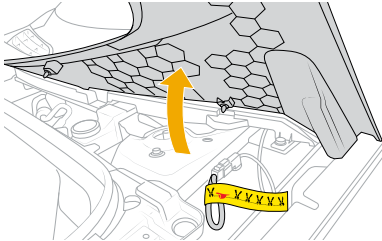

5. Cut the loop on both sides of the yellow tag and remove the section.

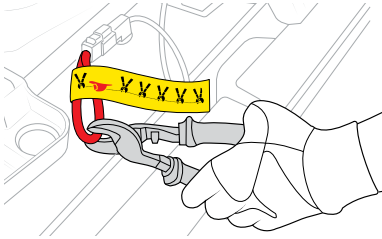


6. Wait one minute.

4 Access to the occupants



The highlighted areas contain high-strength steel. Use a hydraulic cutter and wear personal protective equipment (PPE), being careful not to damage the high-voltage battery.

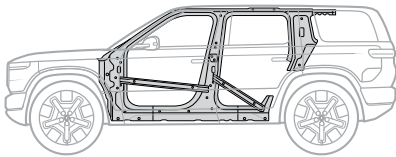

The windshield, roof glass, and front door glass are laminated. The other side windows and liftgate glass are tempered.

5 Stored energy / liquids / gases / solids

12 V



Li-ion
450 V



6 In case of fire



- Wear proper personal protective equipment (PPE).
- Use a fog pattern to approach the vehicle and extinguish the interior.
- Use a thermal imaging camera (TIC) or infrared (IR) to monitor the battery temperature.
- Do not cut the battery or cables.



WARNING

Lithium-ion batteries can self-ignite or reignite.

7 In case of submersion

- Remove a submerged vehicle from water before deactivating or towing it.
- Wear appropriate personal protective equipment (PPE).
- There is no increased risk of electrocution from immersion in water.

8 Towing / transportation / storage

- Use only a flatbed tow truck or a wheel lift and dolly.
- Use the tow truck winch.
- Be sure the Park brake is on.
- Store the vehicle at least 50 ft (15 m) away from other vehicles and structures.



WARNING

Fire hazard. Towing Rivian vehicles with any wheels on the ground can lead to significant damage and overheating. Extreme overheating can cause a fire.

9 Important Additional Information

N/A

10 Explanation of pictograms used

	Lifting points		Remove smart key		Cable cut location		
	LV Battery (12 V)		HV Battery Li-ion (450 V)		HV component		Electric vehicle
	Flammable		Corrosives		Hazardous to human health		Danger to the environment
	Warning, high voltage		Use plenty of water to extinguish the fire		Hood		