



TEEN ARK 2*


EP-ADO-ARCH002

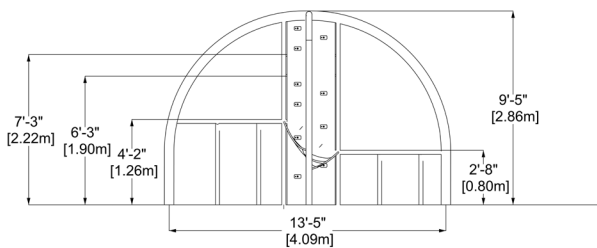

*New product: Technical details in this document may change during engineering and production.

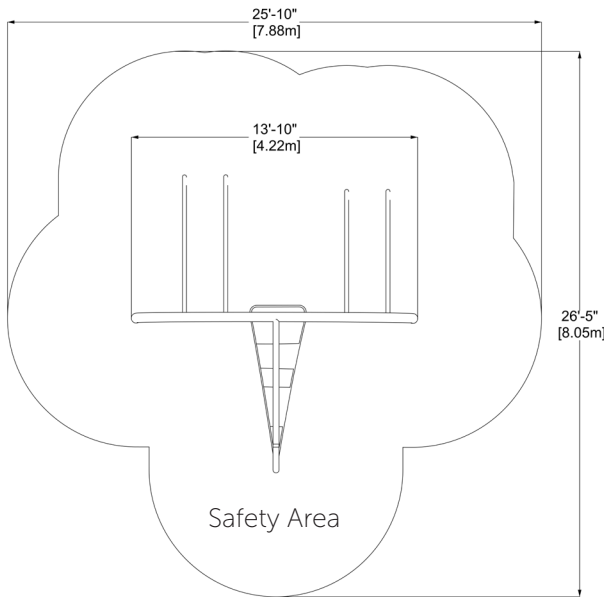

INSTALLATION DETAILS

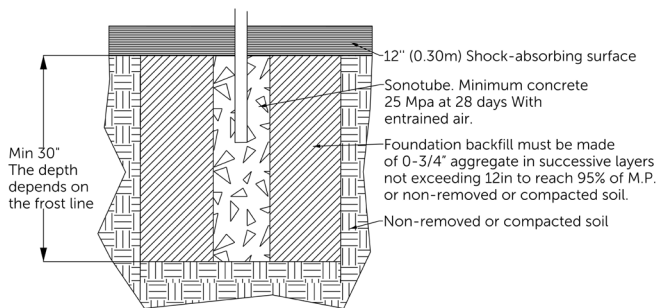

CHARACTERISTICS

Age Group: 12+
 Capacity: 12
 Height: 9'5" (2.86m)
 Fall height: 8'-7" (2.63m)
 Safety area: 25'-10" x 26'-5" (7.88m x 8.05m)
 * : Information provided is for guidance only. As the age group is "over 12", CSA Z614-20/ ASTM F1487 is applied as a guideline.
 The equipment is designed to be installed in 12" (0.30m) of resilient material (EWF, rubber or sand).

MATERIALS

Structure: powder coated steel, secondary pipes in brushed stainless steel.
Seats: rubber with woven nylon core
Cables: braided UV-resistant nylon over seven (7) galvanized steel cables; 0,8" (20mm) diameter;
Climbing panel: 3/4" HDPE (basic product) or 1/2" composite. Price may vary according to material selected at time of quotation.
Climbing holds: Polyurethane


ANCHORS TYPE

Concrete poured in sonotube. The depth of the sonotubes depends on the depth of the frost line in your area.
 The concrete used for the foundation be minimum 25 Mpa at 28 days with entrained air.
 The foundation backfill must be made of 0-3/4" aggregate in successive layers not exceeding 12in to reach 95% of M.P.

PLAY VALUE

Gathering place for teens and training equipment.
 2-height pull-up bars, 2-height parallel bars, 2-sided climbing panel.
 Inclined hammock with two seats.

AVAILABLE COLORS - STRUCTURE

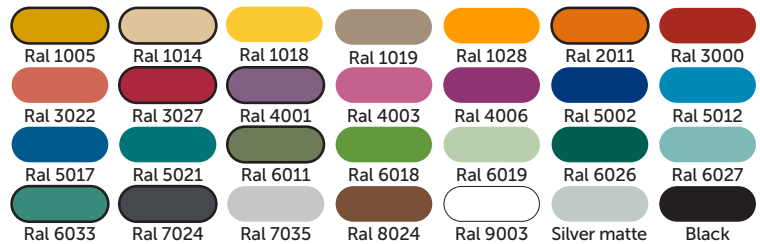

AVAILABLE COLORS - CABLES

