



# Trimble BX982

## DUAL ANTENNA GNSS MODULE FOR PRECISE POSITION AND HEADING APPLICATIONS

### BX982 GNSS RUGGED RECEIVER ENCLOSURE

The Trimble BX982 GNSS receiver enclosure is a multi-channel, multi-frequency OEM GNSS receiver which allows OEM's and System Integrators to rapidly integrate centimeter level positioning and precise heading into their application. The Trimble BX982 supports GPS L1/L2/L5, GLONASS L1/L2/L3 and BeiDou B1, B2 signals. In addition, Trimble is committed to the next generation of modernized GNSS configurations by providing GALILEO compatible products available for customers well in advance of GALILEO system becoming operational. In support of this, the Trimble BX982 is capable of tracking Galileo signals for evaluation and test purposes.<sup>2</sup>

### DUAL ANTENNA INPUT

Single antenna GNSS systems have difficulty determining where the antenna is positioned relative to the vehicle and object of interest, especially when dynamics are low. External sensors can be used to augment this however these tend to drift when static. Heading derived from dual antenna GNSS measurements overcomes these issues and is now economically the right choice. The BX982 harnesses the power of the 220 channel Trimble Maxwell™ 6 Technology with dual chips supporting two antennas connected to the board. Independent observations from both antennas are passed to the processor where multi-constellation RTK baselines are computed. A single connection to the BX982 via RS232, USB, Ethernet or CAN delivers both centimeter accurate positions and less than a tenth of a degree (2 meter baseline) heading accuracy.

### FLEXIBLE INTERFACING

The Trimble BX982 was designed for easy integration and rugged dependability. Customers benefit from the Ethernet connectivity available on the board, allowing high speed data transfer and configuration via standard web browsers. Just like other Trimble embedded technologies; easy to use software commands simplify integration and reduce development times. All software features are password-upgradeable, allowing functionality to be upgraded as your requirements change.

### HIGH INTEGRITY

The BX982 supports Fault Detection and Exclusion (FDE) and Receiver Autonomous Integrity Monitoring (RAIM) for safety-critical applications.

### RUGGED RECEIVER ENCLOSURE

The Trimble BX982 packages a single BD982 receiver module in a rugged enclosure. The unit comes in an environmentally sealed enclosure that is very easy to install. The BX982 is rigorously tested to perform in harsh environmental conditions with the reliability you expect from Trimble.

## Key Features

- ▶ Easy to integrate rugged package
- ▶ Two 220 channel Maxwell™ 6 chips for multi-constellation GNSS support
- ▶ OmniSTAR VBS / XP / G2 / HP support
- ▶ Dual antenna inputs for precise heading calculation
- ▶ Centimeter-level position accuracy
- ▶ Convenience of ethernet connectivity
- ▶ Supports FDE and RAIM



# Trimble BX982 Enclosure

## TECHNICAL SPECIFICATIONS

- Position Antenna based on 220 Channel Maxwell 6 chip:
  - GPS: Simultaneous L1 C/A, L2E, L2C, L5
  - GLONASS: Simultaneous L1 C/A, L2 C/A, L2 P, L3 CDMA<sup>13</sup>
  - SBAS: Simultaneous L1 C/A, L5
  - BeiDou: B1, B2
  - Galileo: Simultaneous L1 BOC, E5A, E5B, E5AltBOC<sup>2</sup>
  - QZSS: L1 C/A, L1 SAIF, L2C, L5
- Vector Antenna based on second 220 Channel Maxwell 6 chip:
  - GPS: Simultaneous L1 C/A, L2E, L2C
  - GLONASS: Simultaneous L1 C/A, L2 C/A, L2 P
  - BeiDou: B1
- Advanced Trimble Maxwell Custom GNSS Technology
- High precision multiple correlator for GNSS pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurements data for low noise, low multipath error, low time domain correlation and high dynamic response
- Very low noise GNSS carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- Proven Trimble low elevation tracking technology
- 1 USB port
- 1 CAN port
- 1 LAN Ethernet port:
  - Supports links to 10BaseT/100BaseT networks
  - All functions are performed through a single IP address simultaneously—including web GUI access and raw data streaming
  - Network Protocols supported:
    - > HTTP (web GUI)
    - > NTP Server
    - > NMEA, GSOFF, CMR etc over TCP/IP or UDP
    - > NTripCaster, NTripServer, NTripClient
    - > mDNS/uPnP Service discovery
    - > Dynamic DNS
    - > eMail alerts
    - > Network link to Google Earth
    - > Support for external modems via PPP
- 3 x RS232 ports:
  - Baud rates up to 460,800
- 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 & 50 Hz positioning outputs (depends on installed option)
- Up to 50 Hz raw measurement & position outputs
- Reference outputs/inputs:
  - CMR, CMR+, SCMRX, RTCM 2.1, 2.2, 2.3, 3.0, 3.1<sup>12</sup>
- Navigation outputs:
  - ASCII: NMEA-0183 GSV, AVR, RMC, HDT, VGK, VHD, ROT, GGK, GGA, GSA, ZDA, VTG, GST, PJT, PJK, BPQ, GLL, GRS, GBS and Binary: Trimble GSOFF
- Control Software:
  - HTML web browser, Internet Explorer, Firefox, Safari, Opera, Google Chrome
- 1 Pulse Per Second Output

## PERFORMANCE SPECIFICATIONS

Time to First Fix (TTFF) <sup>7</sup>	
Cold Start <sup>8</sup>	<45 seconds
Warm Start <sup>9</sup>	<30 seconds
Signal Re-acquisition	< 2 seconds
Velocity Accuracy <sup>3,4</sup>	
Horizontal	.0007 m/sec
Vertical	0.020 m/sec
Acceleration	11 g
Maximum Operating Limits <sup>10</sup>	
Velocity	.515 m/sec
Altitude	.18,000 m

## POSITIONING SPECIFICATIONS

Mode	Accuracy <sup>4</sup>	Latency <sup>5</sup>	Maximum Rate
Single Baseline RTK (<50 km)	0.008 m + 1 ppm Horizontal 0.015 m + 1 ppm Vertical	<20 ms	50 Hz
DGPS	0.25 m + 1 ppm Horizontal 0.50 m + 1 ppm Vertical	<20 ms	50 Hz
SBAS <sup>6</sup>	0.50 m Horizontal 0.85 m Vertical	<20ms	50 Hz

RTK initialization time<sup>3</sup> ..... typically <1 minute  
 RTK initialization reliability<sup>3</sup> ..... >99.9%

## HEADING SPECIFICATIONS

Baseline	Accuracy <sup>4</sup>	Maximum Rate
2 m	<0.09°	50 Hz
10 m	<0.05°	50 Hz

## PHYSICAL AND ELECTRICAL CHARACTERISTICS

Size ..... 261 mm x 140 mm x 55 mm  
 Power ..... 9 VDC to 28 VDC  
 Maximum 5.0 W  
 Weight ..... 1.6 kg  
 Connectors  
 I/O ..... .D-sub DE9 and DA26  
 Antenna ..... TNC (Female)  
 Antenna LNA Power Output  
 Voltage ..... 5 VDC

## ENVIRONMENTAL CHARACTERISTICS<sup>11</sup>


Temperature  
 Operating ..... -40 °C to +70 °C  
 Storage ..... -55 °C to +85 °C  
 Vibration ..... MIL810F, tailored  
 Random 6.2 gRMS operating  
 Random 8 gRMS survival  
 Mechanical shock ..... MIL810D  
 ±40 g operating  
 ±75 g survival  
 IP Rating ..... IP67

## ORDERING INFORMATION

Enclosure Part Number ..... 85992-XX  
 Enclosure ..... Trimble BX982 GNSS receiver enclosure available in a variety of configurations from L1 DGPS upwards

1 Trimble BX982 is available in a variety of software configurations. Specifications shown reflect full capability.  
 2 Developed under a license of the European Union and the European Space Agency.  
 3 May be affected by atmospheric conditions, signal multipath, satellite geometry and placement of antennas. Initialization reliability is continuously monitored to ensure highest quality.  
 4 1 sigma level, when using Trimble Zephyr™ 2 antennas.  
 5 At maximum output rate.  
 6 GPS only and depends on SBAS System performance. FAA WAAS accuracy specifications are <5 m 3DRMS.  
 7 Typical observed values.  
 8 No previous satellite (ephemerides / almanac) or position (approximate position or time) information.  
 9 Ephemerides and last used position known.  
 10 As required by the U.S. Department of Commerce to comply with export licensing restrictions.  
 11 Dependent on appropriate mounting/enclosure design.  
 12 Input only network correction.  
 13 There is no public GLONASS L3 CDMA ICD. The current capability in the receivers is based on publicly available information. As such, Trimble cannot guarantee that these receivers will be fully compatible.

Specifications subject to change without notice.

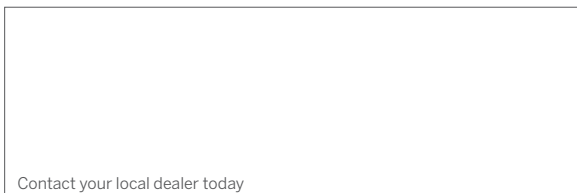

TRIMBLE  
 Integrated Technologies  
 510 DeGuigne Drive  
 Sunnyvale, CA 94085  
 Americas & Asia-Pacific  
 Europe/EMEA

Email: sales-intech@trimble.com

