

STG

How to order

Mounting style

Accessory

STG Series (Option "S027")

How to order

without switch

STG - M - 32 - 25 - S027

Stroke


with switch

STG - M - 32 - 25 - T2H - R - S027

SW-Q'ty

Model no.
(Refer to standard model STG list)

Option S027
(Guide rod end thread)

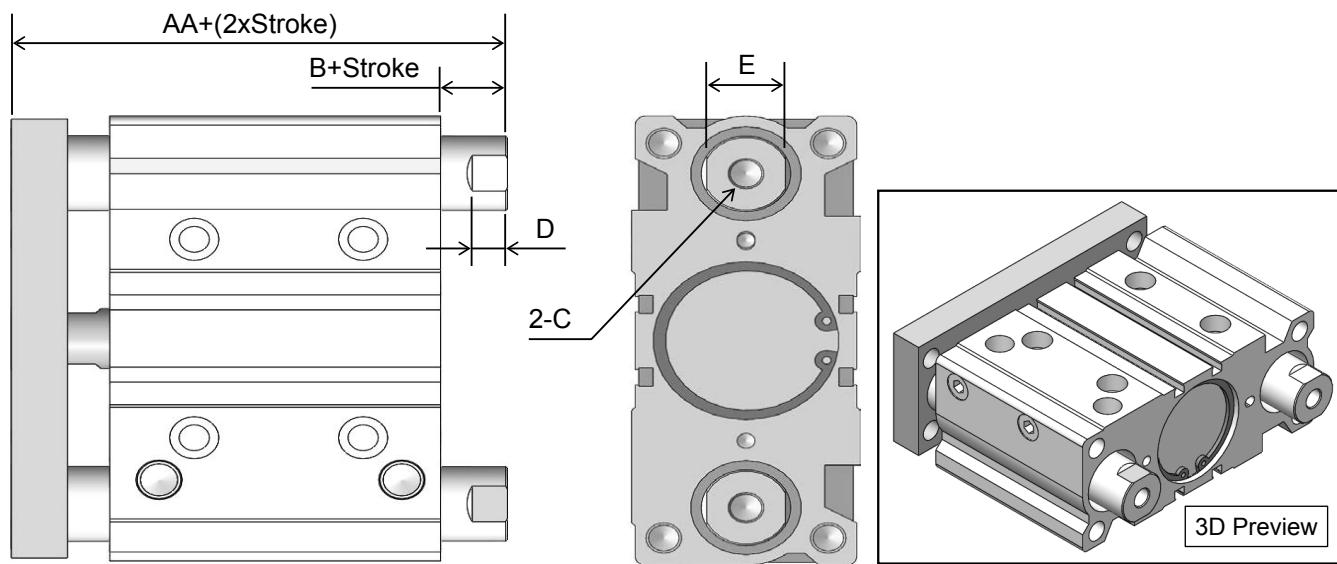

Dimension


Bore	AA	B	C	D	E
Ø12	61.5	19.5	M3 x 8	3.5	6
Ø16	65.5	19.5	M5 x 10	4.5	8
Ø20	72.5	19.5	M6 x 12	5	10
Ø25	74.5	21	M6 x 12	7	14
Ø32	84	24.5	M8 x 15	8	17
Ø40	90.5	24.5	M8 x 15	8	17
Ø50	103	31	M10 x 20	10	22
Ø63	108	31	M10 x 20	10	22
Ø80	124.5	28	M10 x 20	12	27
Ø100	144	28	M10 x 20	11	30

Stroke length


Bore	Stroke (mm.)															
	10	20	25	30	40	50	75	100	125	150	175	200	250	300	350	400
Ø12	•	•		•	•	•	•	•	•	•	•	•	•			
Ø16	•	•		•	•	•	•	•	•	•	•	•	•			
Ø20	•			•	•	•	•	•	•	•	•	•	•	•	•	•
Ø25	•			•	•	•	•	•	•	•	•	•	•	•	•	•
Ø32			•		•	•	•	•	•	•	•	•	•	•	•	•
Ø40			•		•	•	•	•	•	•	•	•	•	•	•	•
Ø50			•		•	•	•	•	•	•	•	•	•	•	•	•
Ø63			•		•	•	•	•	•	•	•	•	•	•	•	•
Ø80			•		•	•	•	•	•	•	•	•	•	•	•	•
Ø100			•		•	•	•	•	•	•	•	•	•	•	•	•

STG Series (Option "S184") STG with V catcher

CKD

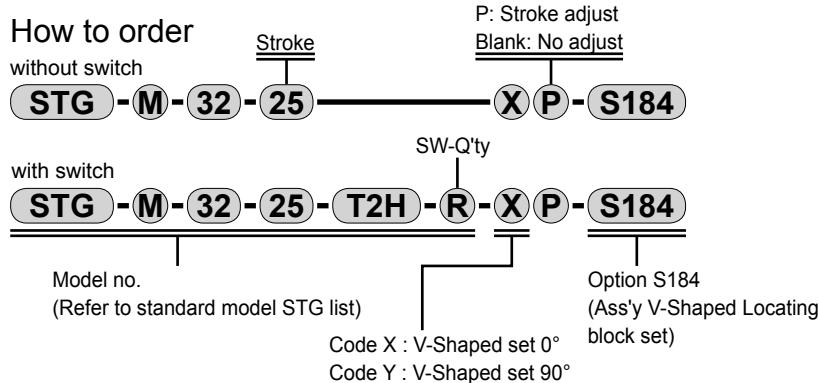


- Stroke adjust selectable (adjust stroke : 0~5 mm)
- Accuracy up

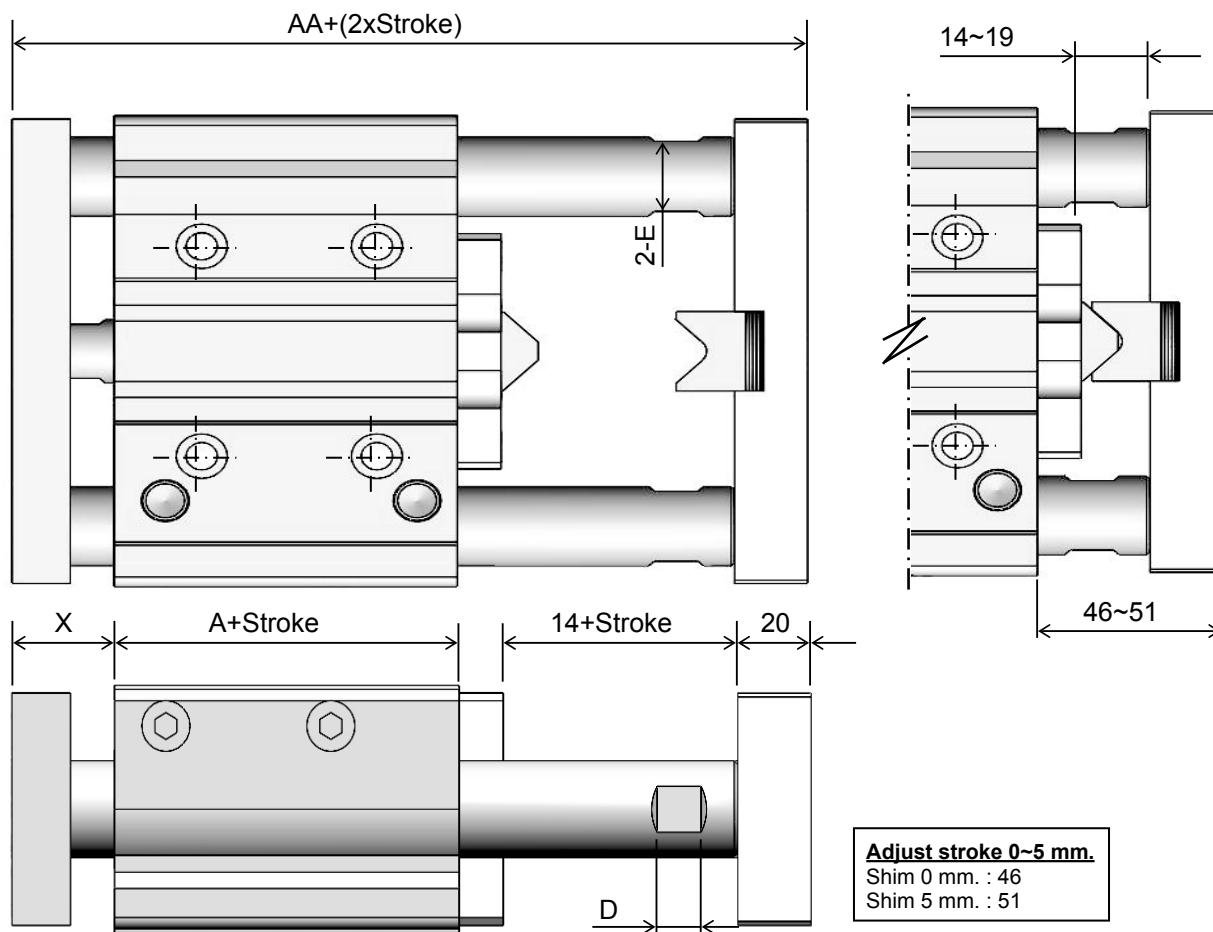

Dimension

Bore	AA	A	D	E	X
Ø32	105.5	37.5	9.5	17	22
Ø40	112	44	9.5	17	22
Ø50	118	44	12	22	28
Ø63	123	49	12	22	28

3D Preview (Code : XP-S184)

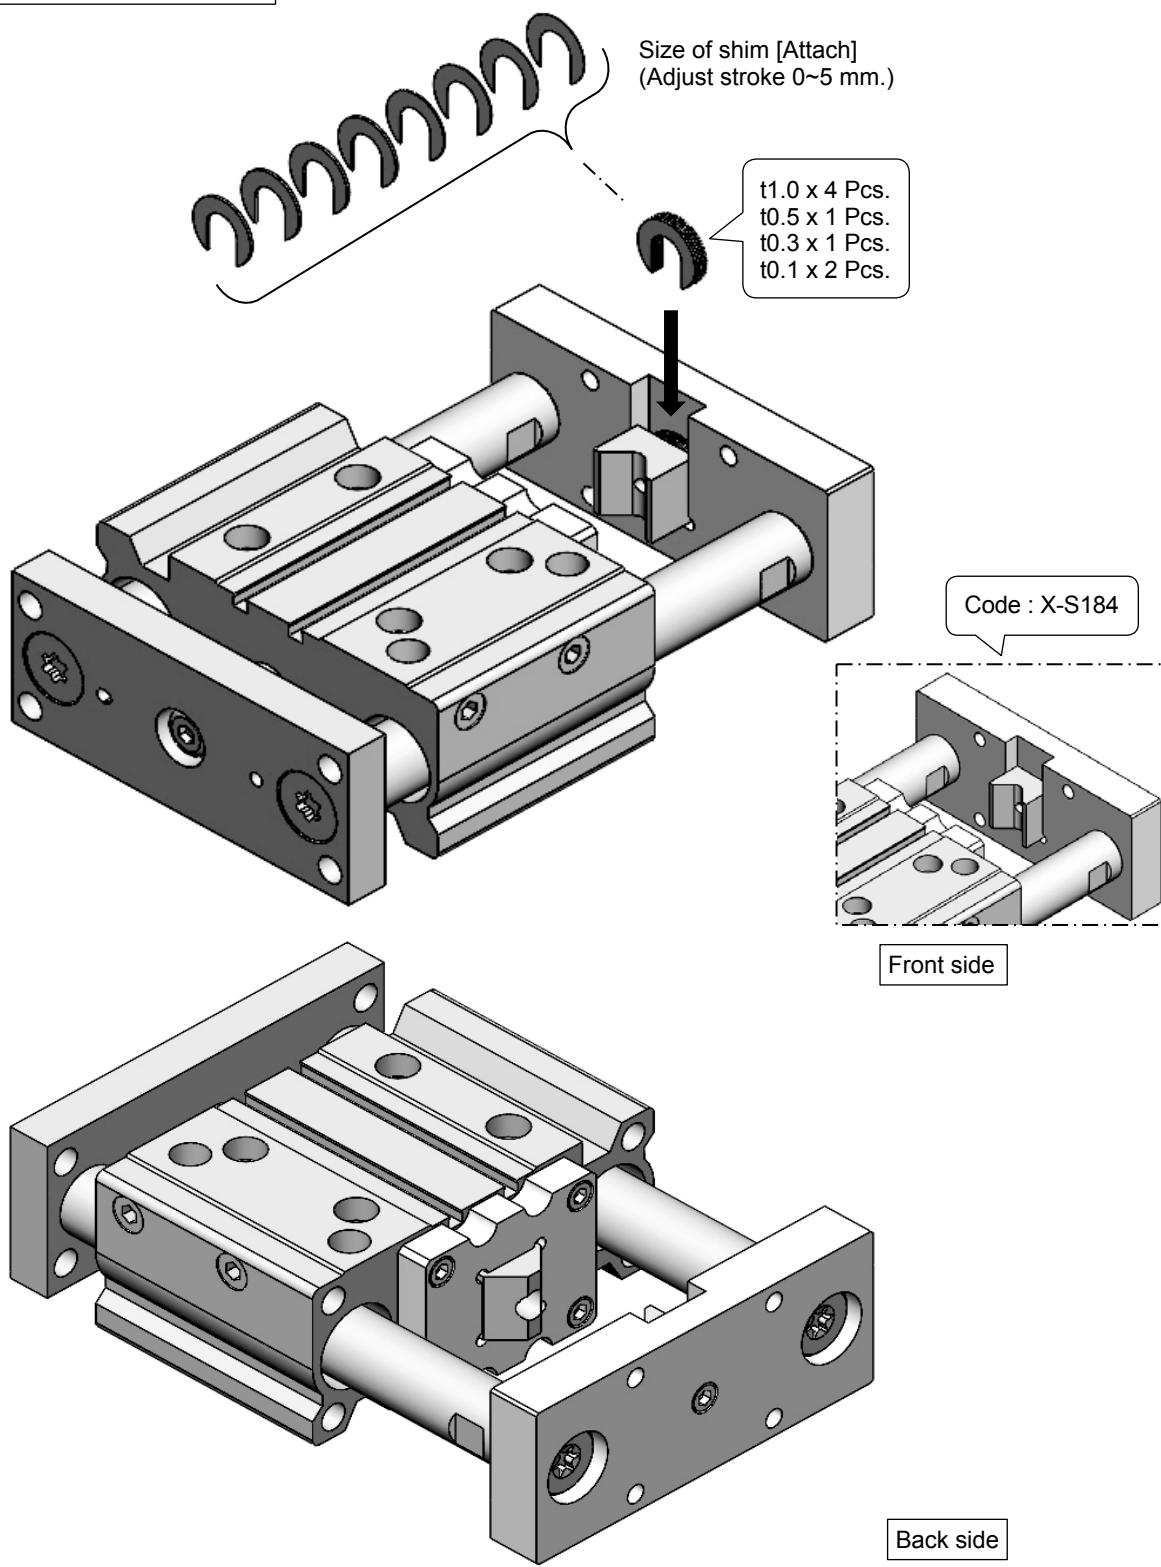


Stroke length


Bore	Stroke (mm.)															
	10	20	25	30	40	50	75	100	125	150	175	200	250	300	350	400
Ø32			●			●	●	●	●	●	●	●	●	●	●	●
Ø40			●			●	●	●	●	●	●	●	●	●	●	●
Ø50			●			●	●	●	●	●	●	●	●	●	●	●
Ø63			●			●	●	●	●	●	●	●	●	●	●	●

STG Series (Option "S185") STG with catcher

CKD

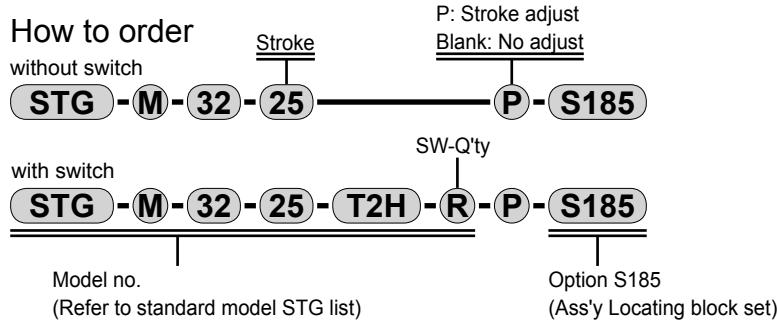


- Stroke adjust selectable (adjust stroke : 0~5 mm)
- Accuracy up

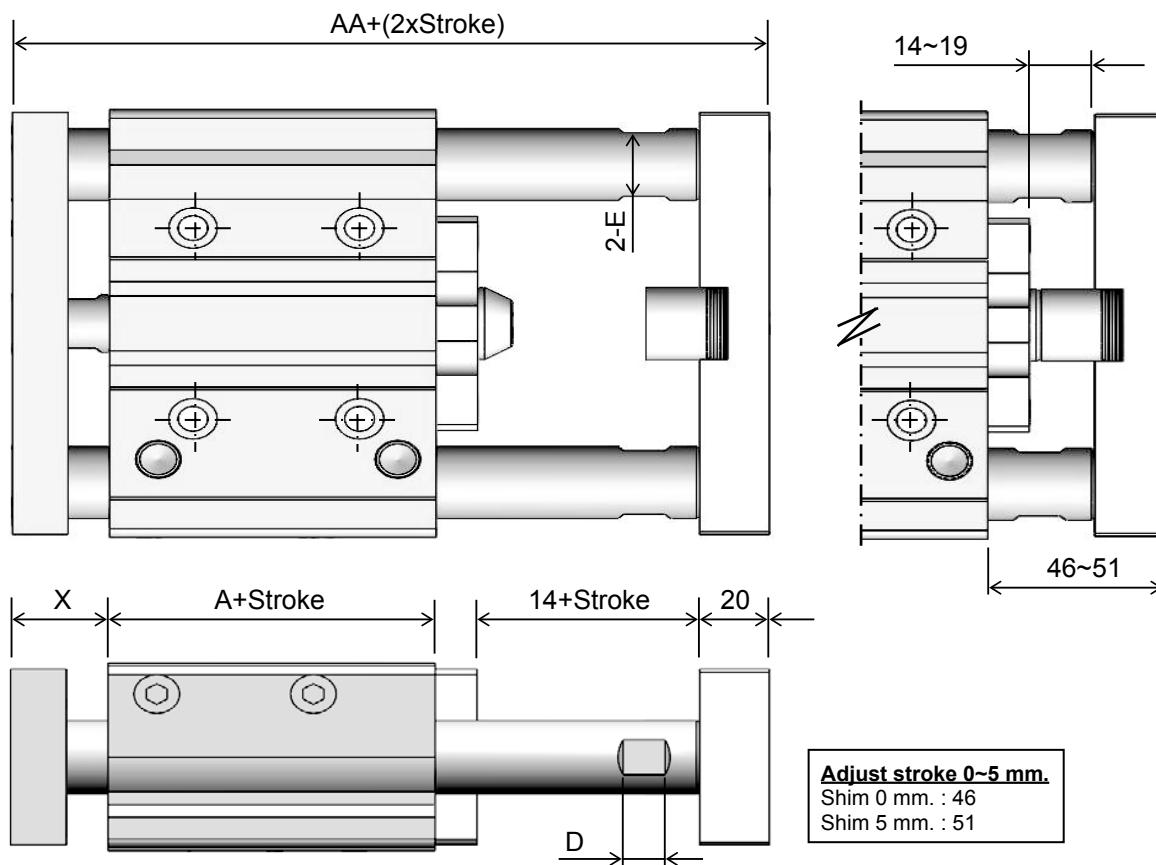

Dimension

Bore	AA	A	D	E	X
Ø32	105.5	37.5	9.5	17	22
Ø40	112	44	9.5	17	22
Ø50	118	44	12	22	28
Ø63	123	49	12	22	28

3D Preview (Code : P-S185)

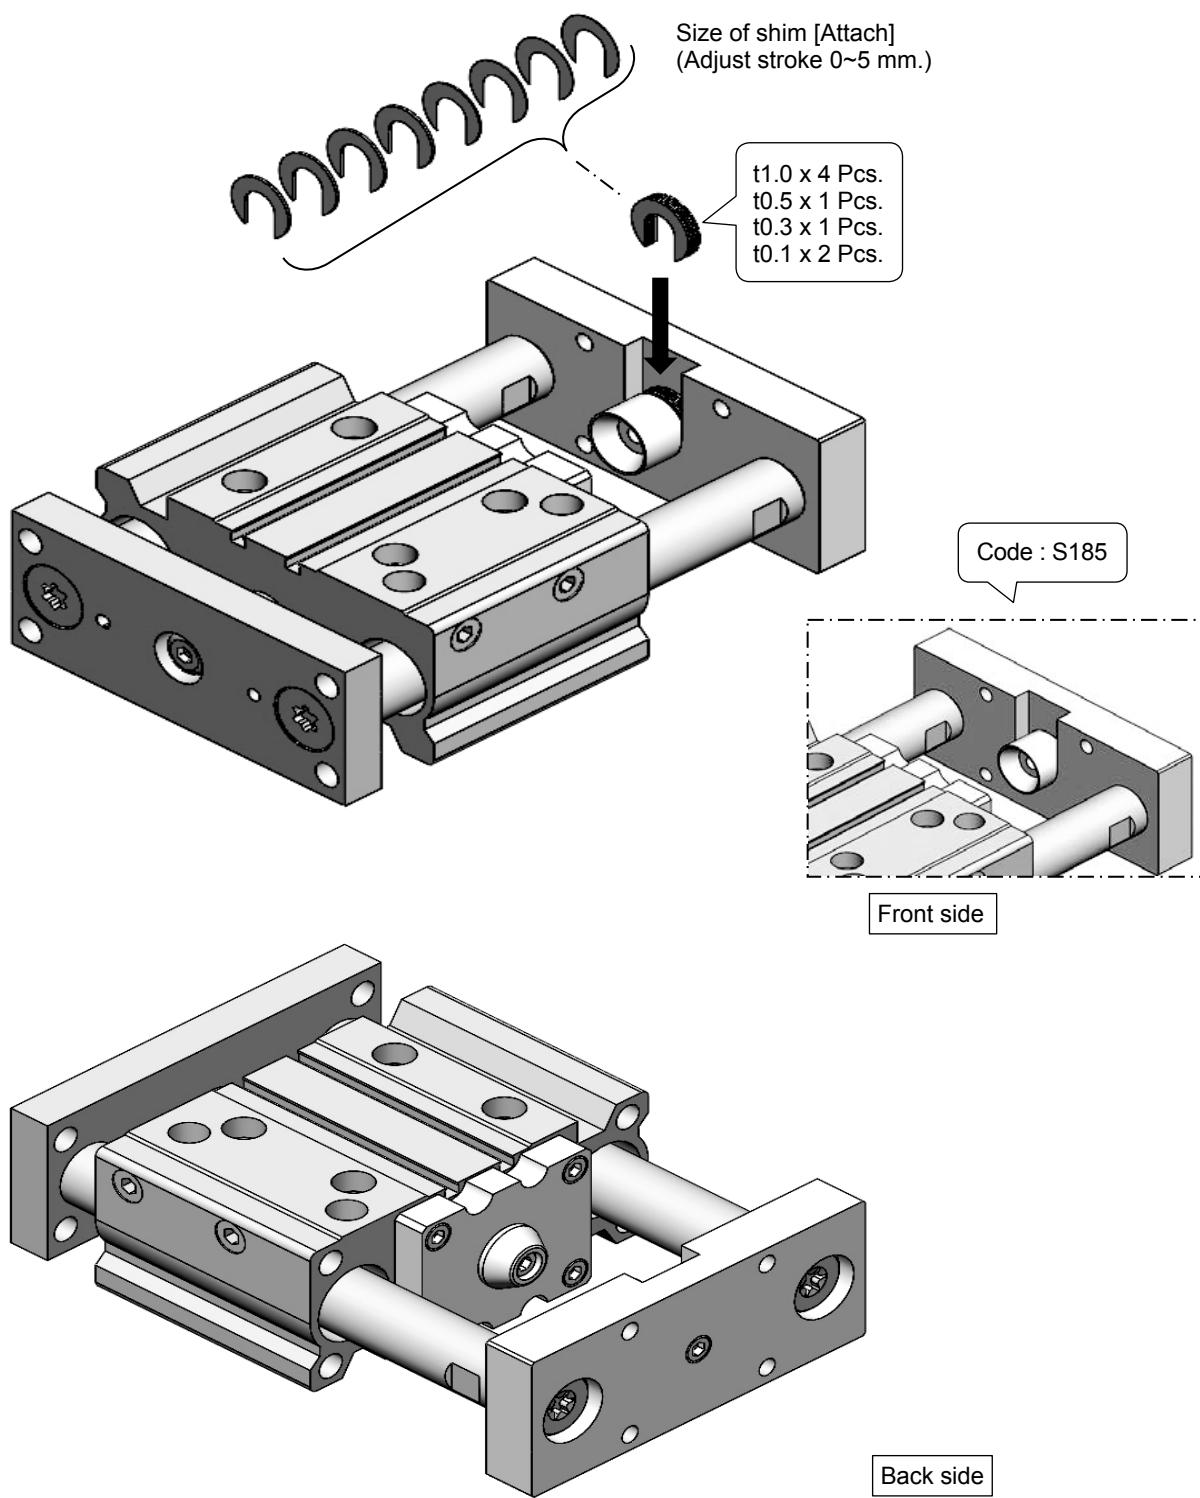

Stroke length

Bore	Stroke (mm.)														
	10	20	25	30	40	50	75	100	125	150	175	200	250	300	350
Ø32			•			•	•	•	•	•	•	•	•	•	•
Ø40			•			•	•	•	•	•	•	•	•	•	•
Ø50			•			•	•	•	•	•	•	•	•	•	•
Ø63			•			•	•	•	•	•	•	•	•	•	•