




# | CT-ALPHA nanotube

## QUALITY WITH PERSPECTIVE

# CT-System for Resolutions down to 150NM

## The System

The CT-ALPHA nanotube provides a unique solution for high-resolution measurements far ahead of established industrial micro CT scanners by applying the latest developments from X-ray research.

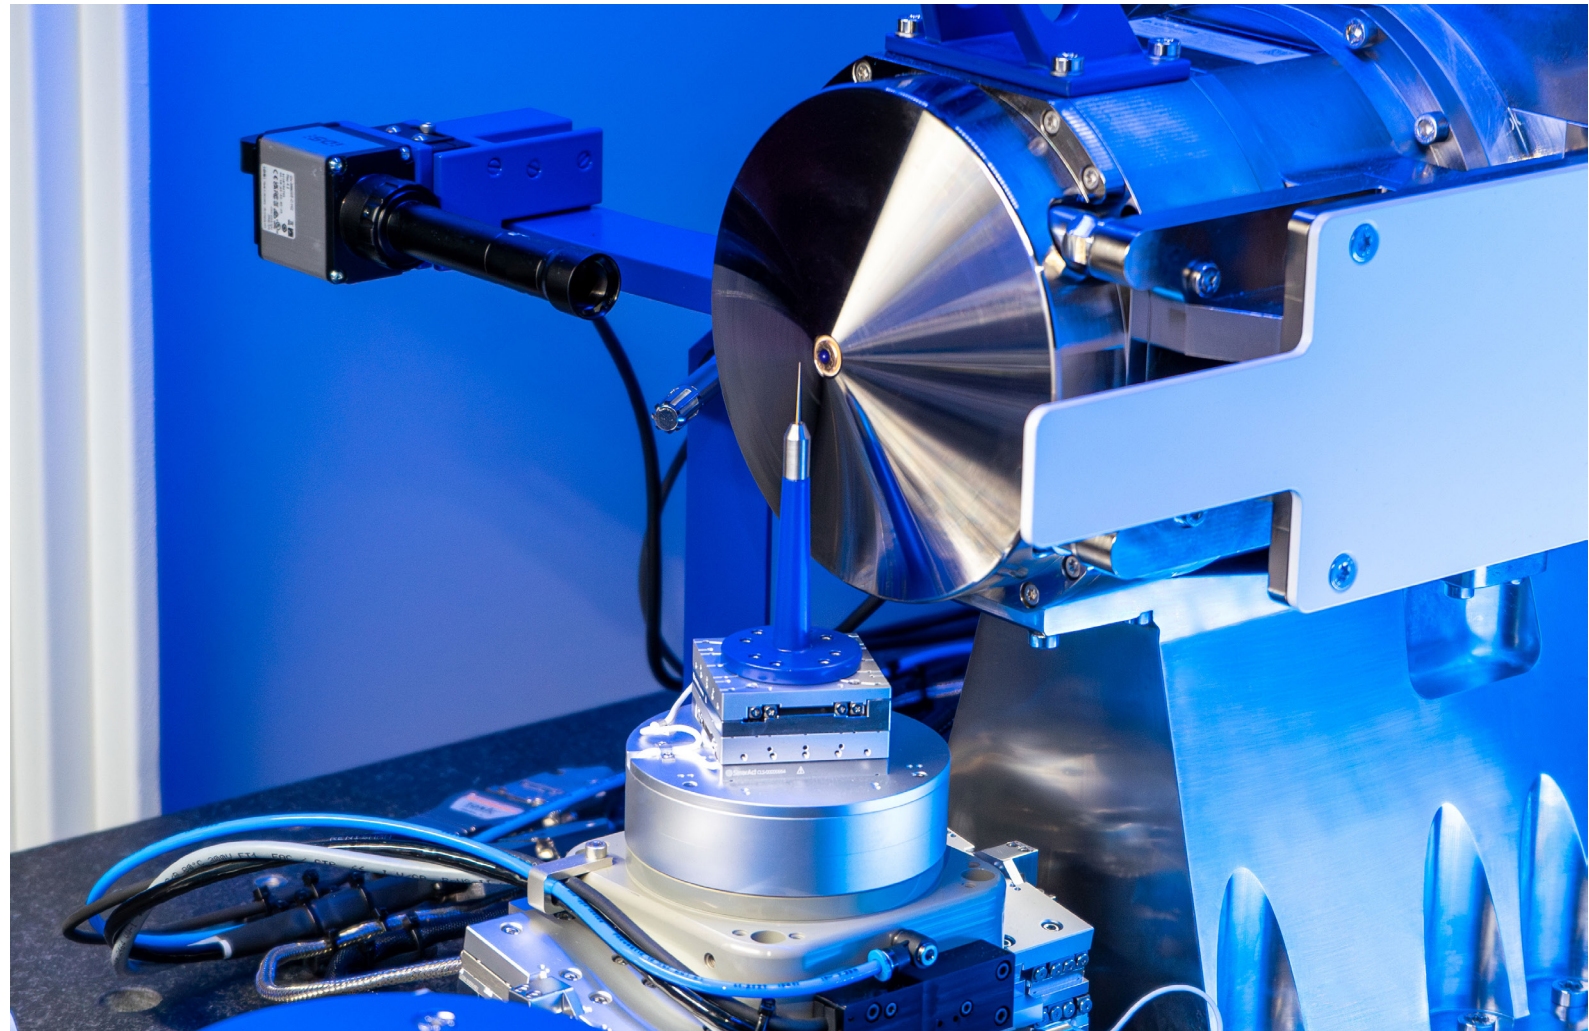

# Easy-to-Handle, Forward-Thinking nano CT

## Modern laboratory technology available for industrial applications

The functional features of novel material systems are often based on their complex inner structures, which are not accessible by established non-destructive analysis methods.

The fabrication of microelectronics and micromechanics becomes more and more complex, packed and 3D. After decades of successful miniaturization, industry now produces structures too small for established process control, hindering further improvements.

Moreover, biological investigations would require more detailed 3D information of hidden inner structures in order to understand the morphology of various organisms, but such samples often provide too low material contrast.

## State-of-the-art components merged into a unique synthesis

Our experience in both hardware and software design enables us to perfectly adapt systems to your individual needs. Besides using only high-precision components, we also develop state-of-the-art reconstruction algorithms.

The Swedish company Excillum is a specialized manufacturer of high performance X-ray sources. The Excillum NanoTube N3 is based on advanced electron optics and tungsten-diamond transmission target technology, achieving higher resolution than any other available nanofocus X-ray source. Automatic e-beam focusing and astigmatism correction ensures that the smallest possible, truly round X-ray spot is achieved. The new generation NanoTube N3 delivers even higher power ensuring 3 times faster imaging speed than its predecessor, the NanoTube N1.

[www.excillum.com](http://www.excillum.com)

The Swiss company DECTRIS is the most experienced company in photon counting X-ray detectors, which feature several advantages compared to commonly used flat-panel detectors. Most importantly, zero readout noise and zero dark current enable an optimum signal-to-noise ratio. Thus, the dynamic range of our X-ray radiographies is not limited by the detector. Moreover, dual energy discrimination enables digital spectrum adjustment.

[www.dectris.com](http://www.dectris.com)

# Take a look into Technology



## High stability: the prerequisite for outstanding resolution

For highest resolution with up to 150 nm typical measurement times are 4 – 8 hours. Lower resolutions for this instrument, which is still at the limit of others, can be done in 1 – 2 hours.


## Passion for nano systems

ProCon X-Ray has been developing X-ray inspection equipment for industrial applications and scientific research since 2004. Our systems come with high resolution X-ray technology and are based on years of experience in developing solutions on a high quality level to meet the customer's requirements.

With our systems we place great value in user friendly operability. Thus, we obtain a high efficient implementation of our CT-systems in our customers' workflow and a very short time for incorporation.

Our clients are the main partners when it comes to develop and design new solutions for new applications. All our systems can be customized for special needs and applications.

# Specifications

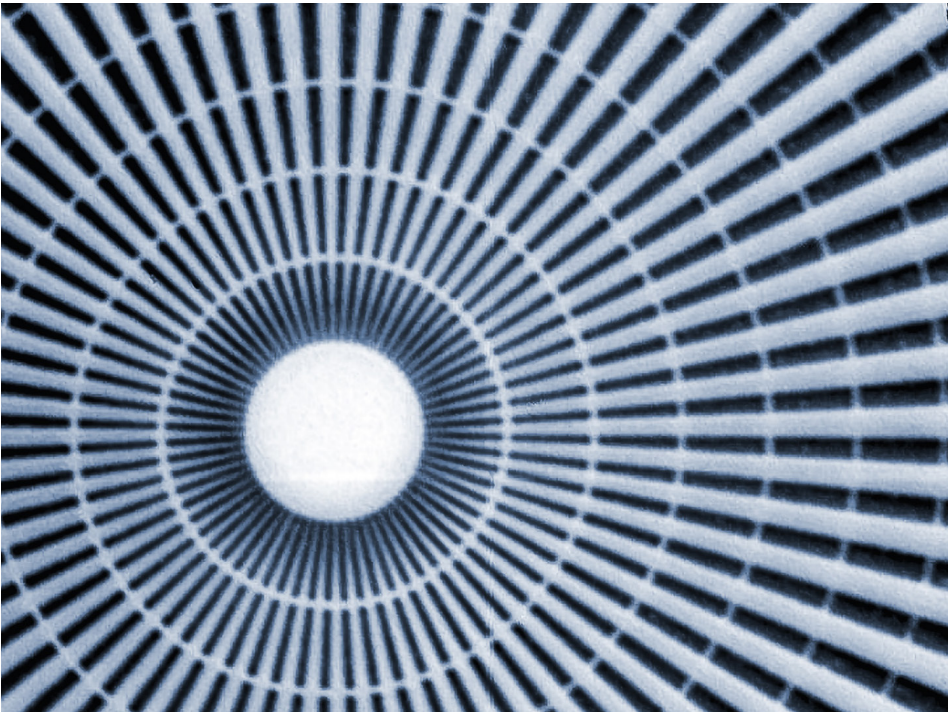

Siemens Star test chart. Even the smallest features of 150 nm lines and spaces can be successfully resolved.

## MIN. VOXEL SAMPLING

50 nm

## MAX. GEOMETRIC MAGNIFICATION

Up to 1500x for CT

## PHOTON-COUNTING DETECTOR

Zero dark current

## ACTIVE AREA

2000 x 500 pixel @ 75µm pixel size  
optional up to 8000 x 2000 pixel

## HIGH EFFICIENCY EVEN ON LOW ENERGIES

For low contrast samples

## VARIABLE FIELD OF VIEW

100 µm – 10 mm

## SPATIAL RESOLUTION

down to 150 nm

## MAX. VOLTAGE

up to 160 kV

## AXIS SYSTEM

12 - axes manipulator

## AXIS RESOLUTION

< 100 nm

## AUTOMATIC ALIGNMENT

Easy to use workflow


## STATE-OF-THE-ART RECONSTRUCTION

Advanced algorithm

## COMPACT DESIGN


Small footprint of 2.0 m × 1.0 m

# Application Examples

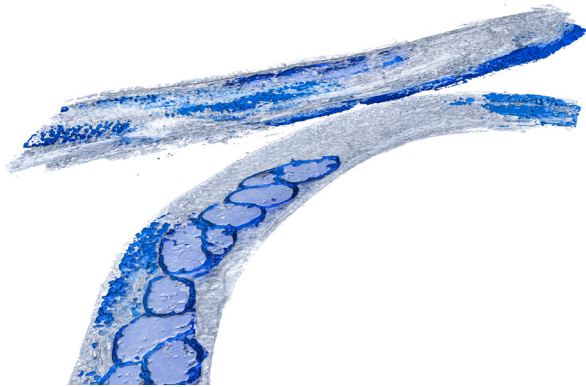


BIOLOGICAL SAMPLES - *c. elegans*

Voxel Sampling: 450 nm

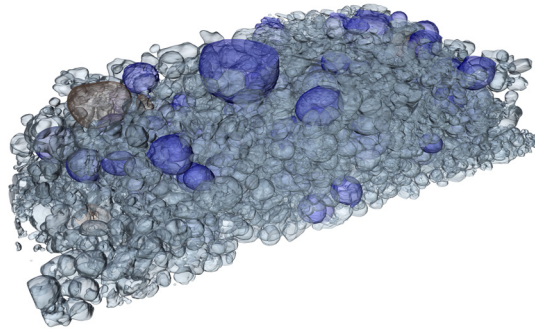

MATERIALS - LITHIUM ANODE

Voxel Sampling: 140 nm

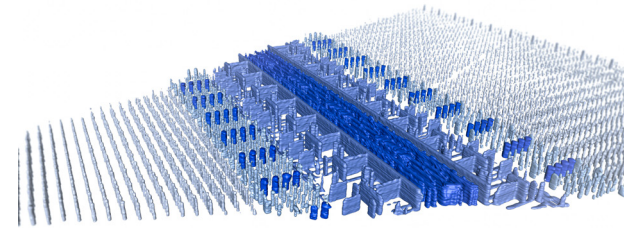

ELECTRONICS - SD CARD

Voxel Sampling: 200 nm

# Easy to Use



## Scanning in nanometer resolution was never this easy

The control software supports the user in all matters.

A separate manipulation (2 DOFs) system on top of the high-precision air bearing rotation stage is installed for adjusting the sample position in the center of the rotation by an automated routine.

From setting the scan parameters to reconstructing the volume the user is guided by an easy and cleaned-up graphical user interface.



**ProCon X-Ray GmbH**

Ludwig-Erhard-Ring 6a  
31157 Sarstedt  
+49 (0) 5066 98414-0  
[sales@procon-x-ray.de](mailto:sales@procon-x-ray.de)