

normet

C280 Sludge cassette

Technical data sheet

100042412

11.12.2019



Pictured machine may include options and additional equipment.

FEATURES

Sludge cassette is designed to clean out the sumps. This cassette may also be used to drain certain job-sites and generally provide better working conditions. Sludge cassette is suitable for use when pumping operations are only intermittent. Pumping is achieved by using a pump that produces a vacuum inside the tank.

Sludge 2800 cassette unit is a rigid vacuum tank fitted with high performance liquid vacuum pump. The cassette is ideal for uplifting liquids and heavy sludge materials. Due to the high performance of the pump, materials can be loaded from depth and drawn long distances. The cassette has safety equipment and is suitable for carrying wastes. Liquid ring vacuumation units, are very efficient at dealing with the heavier and more difficult work but operate equally well on the more straight forward task.

Technical specification



SLUDGE CASSETTE

Tank 2800 L
Suction hose D=100 mm L=6000 mm
Suction pipe D=100 mm L=1000 mm

OTHER

Halogen working lights on sludge cassette (3 pcs)

Dimensions

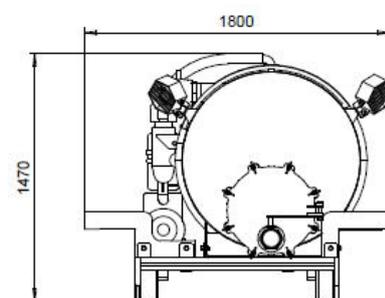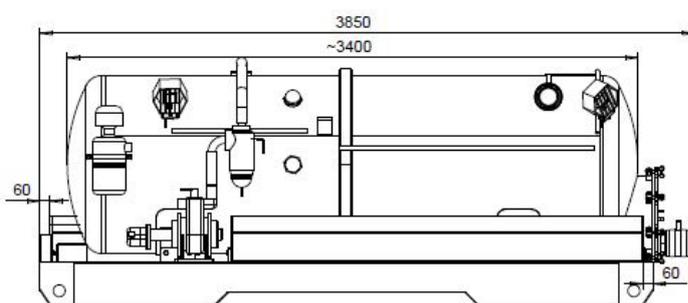

DIMENSIONS

Length	3850 mm
Width	1800 mm
Height	1470 mm
Height with SF 060 / MF 100	2100 mm / 2200 mm

WEIGHT

Empty	1400 kg
Full	5200 kg

Normet reserves the right to change this specification without further notice.